

NEC

ND-24219
ISSUE 2
STOCK # 151980

NEAX[®] 1000 IVS

**Very Small Platform System Manual
NEAX2000 IVS Family of Products**

AUGUST, 1998

NEC America, Inc.

LIABILITY DISCLAIMER

NEC America, Inc. reserves the right to change the specifications, functions, or features, at any time, without notice.

NEC America, Inc. has prepared this document for use by its employees and customers. The information contained herein is the property of NEC America, Inc. and shall not be reproduced without prior written approval from NEC America, Inc.

NEAX and D^{term} are registered trademarks of NEC Corporation.

Copyright 1998

NEC America, Inc.

Printed in USA

NEAX1000 IVS
Very Small Platform System Manual
NEAX2000 IVS Family of Products

TABLE OF CONTENTS

	Page
LIST OF FIGURES.....	iv
LIST OF TABLES.....	vi
REGULATORY INFORMATION.....	vii
1. Regulatory Requirements.....	vii
2. FCC Part 15 Requirements.....	vii
3. FCC Part 68 Registration.....	vii
3.1 Company Notification.....	vii
3.2 Service Requirements.....	viii
3.3 Location of FCC Compliance Labels.....	viii
4. Direct-Inward Dialing (DID) Calls.....	viii
5. Regulatory Information on Single-Line Analog Telephones.....	ix
6. Hearing Aid Compatibility.....	ix
7. Industry Canada CS-03.....	ix
8. Safety Certifications.....	x
8.1 Safety Considerations.....	x
 CHAPTER 1 INTRODUCTION.....	 1
1. PURPOSE.....	1
2. REFERENCE MANUAL.....	1
3. HOW TO FOLLOW THIS MANUAL.....	2
4. SCOPE OF INSTALLATION PROCEDURES.....	2
 CHAPTER 2 GENERAL INFORMATION.....	 3
1. TRUNKING DIAGRAM.....	3
2. SYSTEM CONFIGURATIONS.....	5
2.1 PIM Configuration.....	5
2.2 Installation Methods.....	6
3. FUNCTIONAL OUTLINE OF EQUIPMENT.....	9
3.1 Functional Outline of Modules.....	9
3.2 Functional Outline of Installation Hardware.....	9
3.3 Functional Outline of Circuit Cards.....	10
3.3.1 Control Circuit Card.....	10
3.3.2 Application Circuit Cards.....	11
3.3.3 Line/Trunk Circuit Cards.....	12

TABLE OF CONTENTS (CONTINUED)

	Page
4. CIRCUIT CARD INSTALLATION CONDITIONS	17
4.1 Circuit Card Mounting Slots	17
4.2 Installation Conditions	18
 CHAPTER 3 INSTALLATION PROCEDURE	 19
1. PRECAUTIONS	19
1.1 Grounding Requirements	19
1.2 Static Electricity Guard	20
1.3 Removing/Inserting Circuit Cards	22
2. PROCEDURE	24
NAP-200	
-001 Unpacking	26
1. Unpacking Procedure	26
-002 Marking and Drilling	28
1. CONFIRMING Equipment Layout	28
2. Marking	28
3. Drilling	29
-003 Installation of Main Equipment	30
1. Wall-Mounting Installation	30
2. 19-Inch Rack-Mounting Installation	35
3. DESKTOP Installation	36
4. AC Power Cabling	37
-004 PWR CA-A and BUS Cable Connection	42
-005 Connection of Battery	44
1. Battery Connection	44
1.1 Internal Battery Connection	46
-006 Cable Running to MDF	48
1. MDF Cable	48
2. Cable Running to External MDF	49
-007 Termination of Cables on MDF	50
1. Cable Connection to MDF	50
2. MDF Cross Connections	54
-008 Switch Setting of Circuit Card	105
1. Circuit Cards Switch Setting	105
2. PN-CP03 (MP)	106
3. PZ-PW86 (PWR)	109
4. PZ-PW112 (PWR)	112
5. PN-8COTM/8COTP	114
-009 Mounting Circuit Cards	115
1. Mounting Procedure	115
-010 System Initialization and	
System Data Entry	118
1. System Initialization	118
1.1 All Clear, Except LEN0000 CAT	118
1.2 Resident System Program	118
2. System Data Entry	119
2.1 CAT	119
2.2 MAT	120
2.3 Feature Programming	120

TABLE OF CONTENTS (CONTINUED)

Page

-011	Operation Test.	125
1.	Operation Test.	125
-012	Cleaning and Visual Check.	126
1.	Cleaning	126
2.	Visual Check	126
-013	Mounting of Front Cover	127
1.	Mounting Front Cover	127
CHAPTER 4 OFFICE DATA PROGRAMMING.		129
1.	CUSTOMIZING DATA.	129
1.1	Data Programming Procedure.	129
1.2	General Information on Customizing Data	129
1.2.1	Numbering Plan	129
1.2.2	Station Data	130
1.2.3	Trunk Data	130
1.2.4	Station Hunting Group Data	131
1.2.5	Call Pickup Group Data	131
1.2.6	Speed Calling-System Data	132
1.2.7	Port Assignment Table	132
1.3	Customer Specification Sheets	137
1.3.1	Numbering Plan	137
1.3.2	Station Data	138
1.3.3	Trunk Data	139
1.3.4	Station Hunting Group Data	140
1.3.5	Call Pickup Group Data	141
1.3.6	Speed Calling-System Data	142
1.4	System Configuration	143
1.4.1	Port Assignment Table	143
1.4.2	Bay Face Layout for Module.	144
1.4.3	Quantity Table for Circuit Cards	145

LIST OF FIGURES

Figure	Title	Page
1-1	Installation Reference Manuals	1
1-2	Scope of Installation Procedures	2
2-1	PBX Trunking Diagram	3
2-2	PIM Configuration	5
2-3	Wall-Mounting Installation	6
2-4	19-Inch Rack-Mounting Installation	7
2-5	Desktop Installation	8
2-6	Circuit Card Mounting Slots	17
3-1	Static Electricity Guard	20
3-2	Procedure Flowchart	24
3-3	Static-Sensitive Caution Label	25
001-1	Unpacking Main Equipment	27
002-1	Wall Mounting Points	28
002-2	Installing Anchor Bolt	29
003-1	Connection of PIMs	30
003-2	Screwing PIM to Wall	32
003-3	Connecting Covers	33
003-4	Connecting AC CORD to PIM	34
003-5	Mounting PIM to 19-Inch Rack	35
003-6	Connecting Rubber Foot to PIM	36
003-7	Cable Connection on PZ-PW86/PW112	37
003-8	PWR CNT CA-C Cable Connection between PIMs	40
003-9	AC Power Cable Wiring	41
004-1	Connection of PWR CA-A Cables	42
004-2	Mounting BUS Cards	43
005-1	Battery Replacement Information	45
005-2	Internal Battery Mounting	46
005-3	Internal Battery Connection	47
006-1	MDF Cable	48
006-2	Cable Running to External MDF	49
007-1	Card Slots and LTC Connectors Location	50
007-2	Location of Each LEN	51
007-3	LTC Connector Pin Arrangement	52
007-4	MDF Cross Connection for 4 Line C.O. Trunk Card (PN-4COT)	58
007-5	MDF Cross Connection for 8 Line C.O. Trunk Card (PN-8COT)	59
007-6	MDF Cross Connection for 4W E&M Trunk Card (PN-2ODT)	60
007-7	MDF Cross Connection for 2W E&M Trunk Card (PN-2ODT)	62
007-8	MDF Cross Connection for 2 Line DID Trunk Card (PN-AUCA)	64
007-9	MDF Cross Connection for 4 Line DID Trunk Card (PN-4DITB)	65
007-10	MDF Cross Connection for Single Line Telephone (Standard Line)	66
007-11	MDF Cross Connection for Single Line Telephone (Long Line)	67
007-12	MDF Cross Connection for Multiline Terminal/DSS Console (Standard Line)	68
007-13	MDF Cross Connection for Multiline Terminal/DSS Console (Long Line)	69
007-14	Mounting Handset Support to SN610 ATTCON	70
007-15	Jack Set Installation for SN610 ATTCON	71
007-16	SN610 ATTCON Switch Setting	72
007-17	Cable Connection to SN610 ATTCON	74
007-18	MDF Cross Connection for SN610 ATTCON	75
007-19	MDF Cross Connection for Day/Night Mode Change by External Key	76
007-20	External TAS Indicator Connection Outline	77

LIST OF FIGURES (CONTINUED)

Figure	Title	Page
007-21	MDF Cross Connection for TAS Indicator with Battery	78
007-22	MDF Cross Connection for TAS Indicator with Battery (Ground Start)	79
007-23	Paging Equipment Connection Outline	80
007-24	MDF Cross Connection for Paging Equipment	81
007-25	External Tone Source Connection Outline	83
007-26	MDF Cross Connection for External Tone Source Equipment	84
007-27	Connecting Tone Source Supplied with D.C.	86
007-28	MDF Cross Connection for External BGM Sources.	87
007-29	Cable Connection Between PN-TNTA and External BGM Sources	88
007-30	PFT Connection Outline	89
007-31	MDF Cross Connection for PFT (PN-AUCA).	90
007-32	PFT (PZ-8PFTA) Connection Outline	92
007-33	Mounting PZ-8PFTA Card to PIM	93
007-34	Connection of 25-Pair Cable and PZ-8PFTA.	94
007-35	PFT Connector Pin Assignment	95
007-36	MDF Cross Connection for PFT (PZ-8PFTA)	96
007-37	MDF Cross Connection for Alarm Display Panel.	98
007-38	Assembly of SN716 DESKCON	99
007-39	SN716 DESKCON Cable Connection	100
007-40	MDF Cross Connection with AC Adapter Power Option	101
007-41	MDF Cross Connection via PN-PW00 Power Option	102
007-42	Single Line Device Interface	103
007-43	Message Center Interface Connection for VM00 to AP00.	104
008-1	PN-CP03 (MP) Card	106
008-2	PZ-PW86 (PWR) Card.	109
008-3	PZ-PW112 (PWR) Card.	112
008-4	PN-8COT (COT) Card	114
009-1	PZ-PW86/PZ/PW112 Card Lamp Indication	115
009-2	Mounting Circuit Cards	116
009-3	Installing Card Stopper	117
0010-1	Connecting External Hold Tone Source	122
0010-2	MP Card Switch Setting.	122
013-1	Mounting Front Cover	127
4-1	Module Configuration.	144

LIST OF TABLES

Table	Title	Page
2-1	Symbols in Trunking Diagram Description	4
2-2	Functional Outline of Modules	9
2-3	Functional Outline of Installation Hardware	9
2-4	Functional Outline of Control Circuit Cards	10
2-5	Functional Outline of Application Circuit Cards	11
2-6	Functional Outline of Line/Trunk Circuit Cards	12
2-7	Line Condition of Each Terminals	14
3-1	Removing/Inserting Circuit Cards Procedure	22
003-1	Recommended Fasteners	31
007-1	LTC Connector Accommodation	50
007-2	LTC0 and LTC1 MDF Cross Connection Information	54
008-1	Control Circuit Cards	105
008-2	Line/Trunk Circuit Cards	105
008-3	PN-CP03 (MP) Card Lamp Indications	106
008-4	PN-CP03 (MP) Card Switch Settings	107
008-5	PZ-PW86 (PWR) Card Lamp Indications	110
008-6	PZ-PW86 (PWR) Card Switch Settings	111
008-7	PZ-PW112 (PWR) Card Lamp Indications	113
008-8	PZ-PW112 (PWR) Card Switch Settings	113
008-9	PN-8COT (COT) Card Lamp Indications	114
4-1	Data Programming Procedure	129
4-2	Port Assignment Method	132
4-3	Numbering Plan Data Table	137
4-4	Station Data Table	138
4-5	Trunk Data Table	139
4-6	Station Hunting Group Data Table	140
4-7	Call Pickup Group Data Table	141
4-8	Speed Calling-System Data Table	142
4-9	Port Assignment Table	143
4-10	Quantity Table for Module	144
4-11	Quantity Table for Line/Trunk Circuit Cards	145
4-12	Quantity Table for Control Circuit Cards	145
4-13	Quantity Table for Application Circuit Cards	146

REGULATORY INFORMATION

1. Regulatory Requirements

The Federal Communications Commission (FCC) has established rules that permit the NEAX1000 IVS to be directly connected to the telephone network. A jack is provided on party lines or coin lines.

The telephone company may make changes in its technical operations and procedures. If such changes affect the compatibility or use of the NEAX1000 IVS, the telephone company must provide adequate notice of the changes.

This equipment complies with the requirements in Part 15 of FCC Rules for a Class A computing device. Operation of this equipment in a residential area may cause unacceptable interference to radio and TV reception requiring the operator to take whatever steps are necessary to correct this interference.

2. FCC Part 15 Requirements

In compliance with FCC Part 15 Rules, the following statement is provided:

WARNING

This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

3. FCC Part 68 Registration

3.1 Company Notification

Before installing the NEAX1000 IVS to the telephone network, the telephone company must be provided with the following:

- Your telephone number
- The FCC registration numbers:

	JAPAN	USA
PBX	AY5JPN-20542-PF-E	AY5USA-21582-PF-E
Hybrid	AY5JPN-20543-MF-E	AY5USA-21583-MF-E
Key system	AY5JPN-20586-KF-E	AY5USA-21584-KF-E

The Ringer Equivalence Number is 1.6B; the required USOC jacks are RJ21X, RJ2EX, and RJ2GX.

Note: Limitations on features exist if the system is registered as a KF system. Refer to Features and Specifications for details.

3.2 Service Requirements

In the event of equipment malfunction, all repairs will be performed by NEC or an authorized distributor of NEC. It is the responsibility of users requiring service to report the need for service to NEC or to one of their authorized distributors.

If the equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. If advance notice is not practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes in its facilities, equipment, operations, or procedures that affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make necessary modifications in order to maintain uninterrupted service.

If trouble is experienced with this equipment, please contact NEC America, Inc.'s Oregon plant at (503) 648-5000 for repair and/or warranty information. If the trouble is causing harm to the telephone network, the telephone company may request that you remove the equipment from the network until the problem is resolved.

NO REPAIRS CAN BE DONE BY THE CUSTOMER.

3.3 Location of FCC Compliance Labels

Labels stating the NEAX1000 IVS FCC registration number and compliance with FCC Parts 15 and 68 are attached on the inside of the system's front cover. Example of the labels are as follows:

"This equipment complies with the requirements in Part 15 of FCC Rules for a Class A computing device. Operation of this equipment in a residential area may cause unacceptable interference to radio and TV reception requiring the operator to take whatever steps are necessary to correct the interference."	NEAX1000 IVS		
	Complies With Part 68 FCC Rules		
	FCC Registration Numbers : AY5USA-21582-PF-E		
	AY5USA-21583-MF-E		
	AY5USA-21584-KF-E		
	Ringer Equivalence : 1.6B		
	NEC	NEC America, Inc.	MADE IN USA

4. Direct-Inward Dialing (DID) Calls

Allowing this equipment to be operated in such a manner as to not provide for proper answer supervision is a violation of Part 68 of the FCC's rules.

PROPER ANSWER SUPERVISION IS WHEN:

- (a) This equipment returns answer supervision to the PSTN when DID calls are:
 - Answered by the called station
 - Answered by the attendant
 - Routed to a recorded announcement that can be administered by the CPE user
 - Routed to a dial prompt

- (b) This equipment returns answer supervision on all DID calls forwarded to the PSTN. Permissible exceptions are:
- A call is unanswered
 - A busy tone is received
 - A reorder tone is received.

EQUAL ACCESS REQUIREMENTS

This equipment is capable of providing users access to interstate providers of operator services through the use of access codes. Modification of this equipment by call aggregators to block access dialing codes is a violation of the Telephone Operator Consumers Act of 1990.

5. Regulatory Information on Single-Line Analog Telephones

NEC single-line telephones comply with Part 68 of FCC Rules. On the bottom of the equipment is a label that states, among other information, the FCC registration number and ringer equivalence number (REN) for the equipment. If requested, this information should be provided to the telephone company.

The equipment uses the following USOC jacks: RJ11C.

The equipment should be used only behind a PBX or KTS. The REN is used to determine the quality of device that may be connected to the telephone line. Excessive RENs on the telephone line may result in the devices not ringing in response to an incoming call. In most, but not all, areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to the line as determined by the total RENs, contact the telephone company to determine the maximum REN for the calling area.

6. Hearing Aid Compatibility

The D^{term} terminals provided for the NEAX1000 IVS are hearing aid compatible. FCC rules prohibit the use of non-hearing aid compatible telephones.

NEC-type single-line telephone sets used in conjunction with the NEAX1000 IVS are hearing aid compatible. If other than NEC-type single-line telephone sets are to be used with this system, ensure that these are hearing aid compatible.

7. Industry Canada CS-03

Certification number: 140 5976A

Load Number of the equipment: 21

NOTICE: The Industry Canada label identifies certified equipment. The certification means that the equipment meets certain telecommunications network protective operational and safety requirements. The department does not guarantee the equipment will operate to the user's satisfaction.

Before installing the equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. In some cases, the company's inside wiring associated with a single line individual service may be extended by means of a certified connector assembly (telephone extension cord). The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be made by an authorized Canadian maintenance facility designated by the supplier. Any repairs or installations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request that the user disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines, and internal metallic water pipe system, if present, are connected together. This protection may be particularly important in rural areas.

CAUTION 1: Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.

CAUTION 2: The act of monitoring or recording telephone conversations under certain circumstances may violate federal or state statutes. Consultation with your legal counsel prior to engaging in such practices would be advisable.

NOTICE: The Load Number assigned to each terminal device denotes the percentage of the total load to be connected to a telephone loop which is used by the device, to prevent overloading. The termination on a loop may consist of any combination of devices subject only to the requirement that the total of the load numbers of all the devices does not exceed 100.

8. Safety Certifications

This equipment has been listed by Underwriters Laboratories and found to comply with all the applicable requirements of the standard for telephone equipment U.L. 1459. This equipment complies with CSA standard C 22.2 No. 225.

8.1 Safety Considerations

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- (1) Never install telephone wiring during a lightning storm.
- (2) Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- (3) Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected at the network interface.
- (4) Use caution when installing or modifying telephone lines.
- (5) Read and understand all instructions.
- (6) Follow all warnings and instructions marked on the product.
- (7) Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- (8) Do not use this product near water; for example, under water pipes near a bath tub, sink, or laundry tub, in a wet basement, or near a swimming pool.
- (9) Do not place this product on an unstable cart, stand, or table. The product may fall, causing serious damage to the product.

- (10) Slots and openings in the cabinet and the back or bottom are provided for ventilation, to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should never be placed near or over a radiator or heat register. This product should not be placed in a built-in installation unless proper ventilation is provided.
- (11) This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power source available, consult with your local power company.
- (12) This product normally connected with a three wire grounding type plug, a plug having a third (grounding) pin. This plug will only fit into a grounding type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact an electrician to replace your obsolete outlet. Do not defeat the safety purpose of the grounding type plug.
- (13) Do not allow anything to rest on the power cord. Do not locate this product where the cord will be abused by persons walking on it.
- (14) Do not overload wall outlets and extension cords as this can result in the risk of fire or electric shock.
- (15) Never push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock. Never spill liquid of any kind on the product.
- (16) To reduce the risk of electric shock, do not disassemble this product, but take it to a qualified serviceman when some service or repair work is required. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the appliance is subsequently used.
- (17) Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
 - (a) When the power supply cord or plug is damaged or frayed.
 - (b) If liquid has been spilled into the product.
 - (c) If the product has been exposed to rain or water.
 - (d) If the product does not operate normally by following the operating instructions. Adjust only those controls, that are covered by the operating instructions because improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
 - (e) If the product has been dropped or the cabinet has been damaged.
 - (f) If the product exhibits a distinct change in performance.
- (18) Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- (19) Do not use the telephone to report a gas leak in the vicinity of the leak.

This page is for your notes.

CHAPTER 1 INTRODUCTION

1. PURPOSE

This manual explains the installation procedure for the NEAX1000 IVS (PBX) System.

2. REFERENCE MANUAL

During installation, refer to the NEAX2000 IVS manuals listed in [Figure 1-1](#).

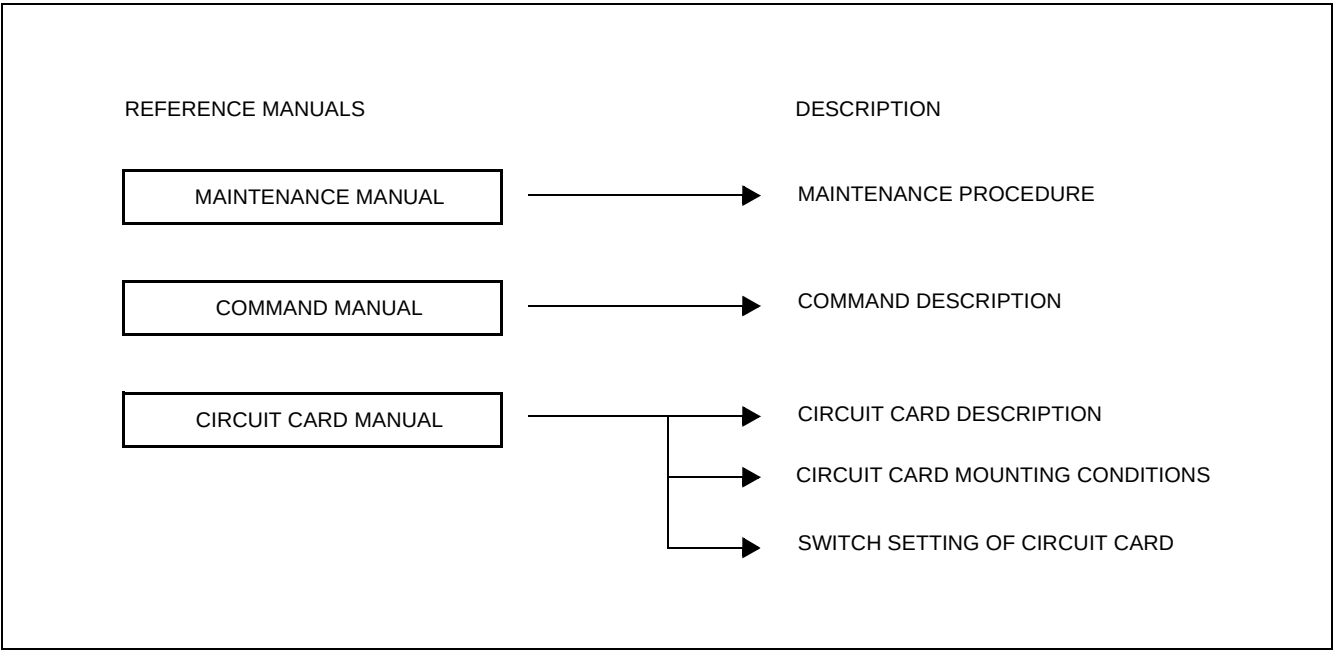


Figure 1-1 Installation Reference Manuals

3. HOW TO FOLLOW THIS MANUAL

The Installation Procedure is shown by means of flowcharts with an NAP (NEC Action Procedure) Number. The detail of the work for each step is described in corresponding NAP.

4. SCOPE OF INSTALLATION PROCEDURES

This manual covers the installation shown in [Figure 1-2](#).

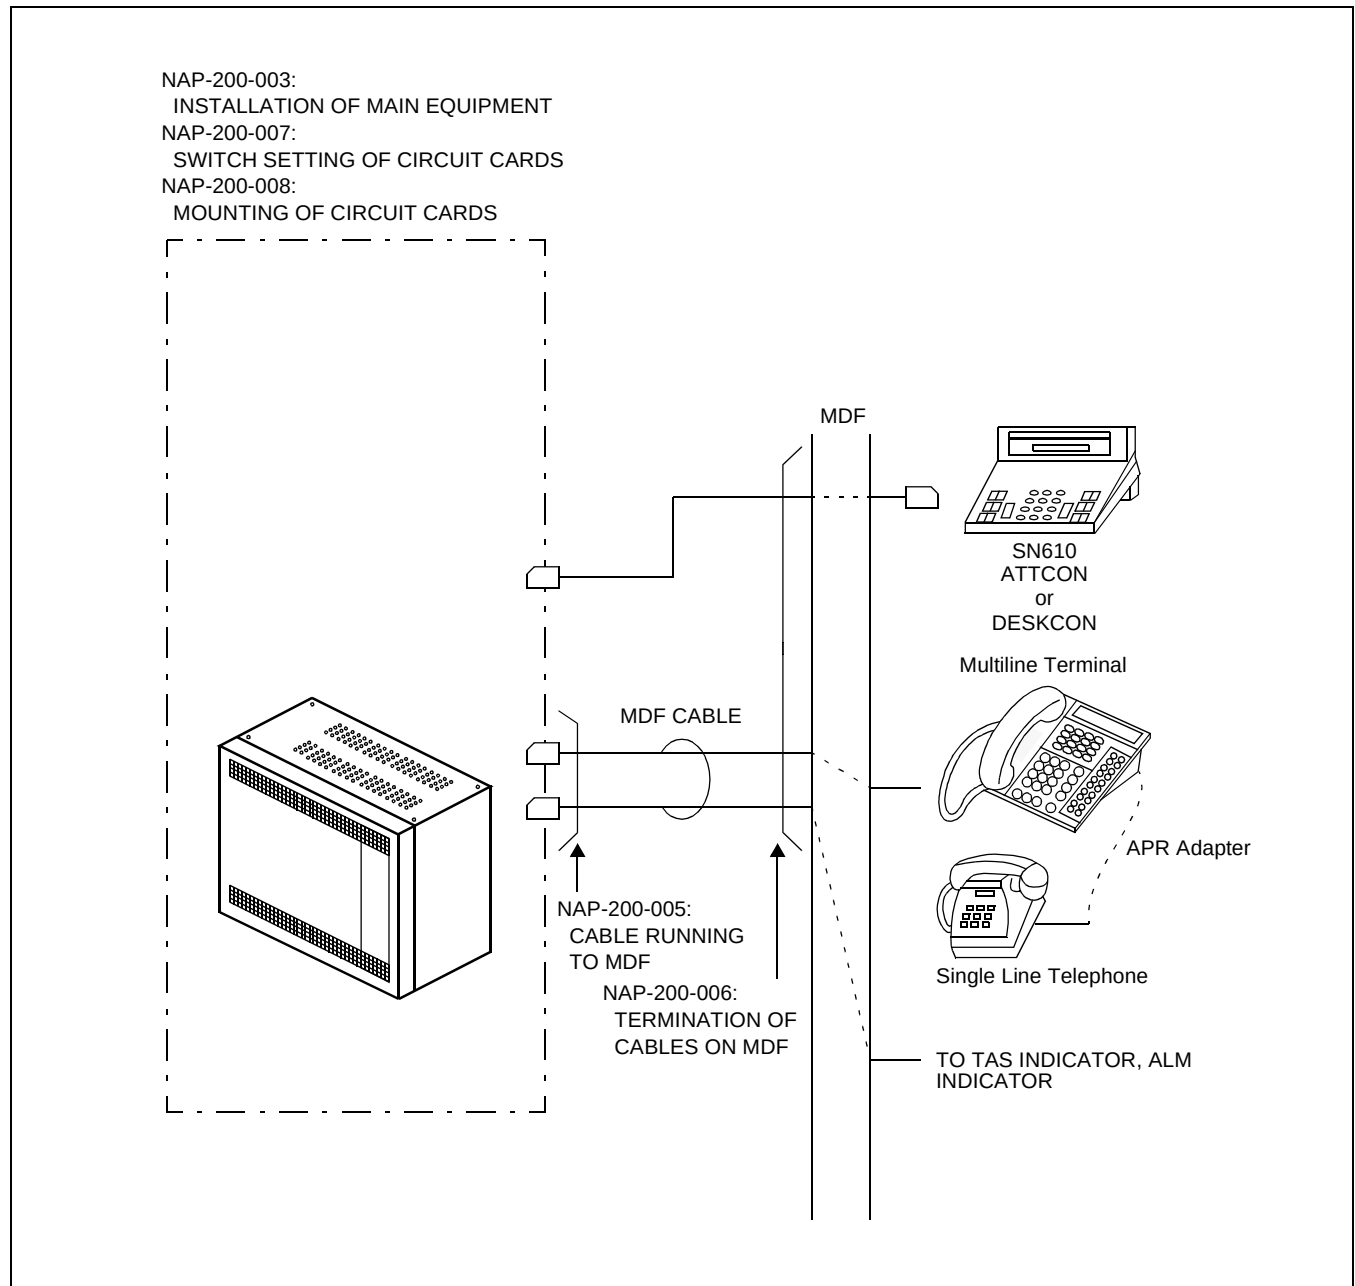


Figure 1-2 Scope of Installation Procedures

CHAPTER 2 GENERAL INFORMATION

1. TRUNKING DIAGRAM

Figure 2-1 shows a typical trunking diagram for the PBX.

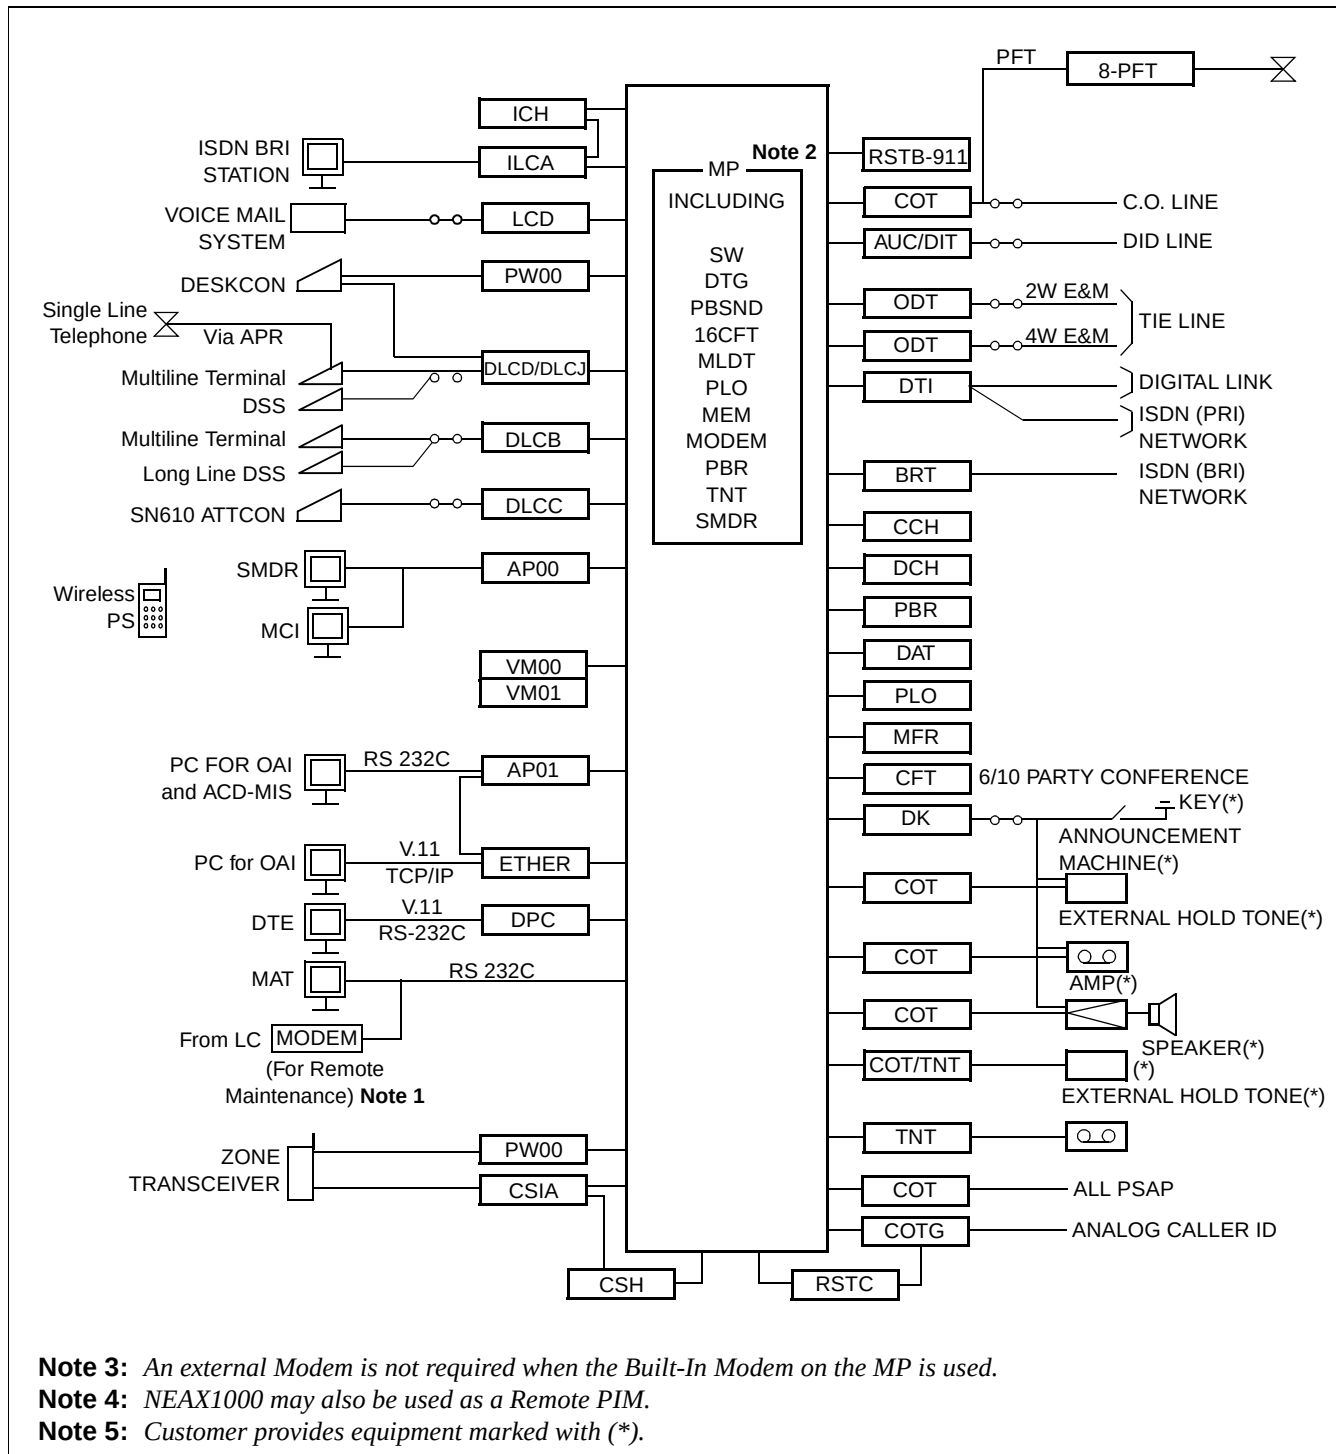


Figure 2-1 PBX Trunking Diagram

Table 2-1 Symbols in Trunking Diagram Description

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
AMP	Amplifier for External Speaker	ILCA	BRI Station Line Card
AP00	SMDR/MCI/PMS/Hotel Application Card	KEY	External Key
AP01	OAI Interface Card	LCD/LCS	Line Circuit Card (for Single Line Telephone)
AUC	Analog Universal Circuit Card (Long Line Circuit, DID Trunk)	MAT	Maintenance Administration Terminal
BGM	External Music Source for Multiline Terminal Back Ground Music Service	MDF	Main Distribution Frame
CCH	Common Channel Handler Card	MEM	Main Memory
CFT	6/10-Party Conference Trunk Card	MFR	MF Receiver Trunk Card (TIANI)
COT	C.O. Trunk Card	MLDT	Melody Trunk Card
COTG	Analog Caller ID Trunk Card	MODEM	Modem
CSIA	Zone Transceiver Line Card	MP	Main Processor Card
DAT	Digital Announcement Trunk Card	PFT	Power Failure Transfer
DCH	D-Channel Handler Card	ODT	OD Trunk Card (2/4 wire E&M)
DIT	DID Trunk Card	PBR	PB Receiver Card
DK	External Relay/Key Interface Card	PBSND	PB Sender
DLCD/DLCJ	Digital Line Circuit Card (for Multiline Terminal/DESKCON)	PLO	Phase Lock Oscillator
DLCB	Digital Line Circuit Card (for Multiline Terminal Long Line/ DESKCON)	PW00	Power Card for 2 Zone Transceivers or one Attendant DeskCon
DLCC	Digital Line Circuit Card (for SN610 ATTCON)	RSTB-911	Register/Sender E911
DPC	Data Port Controller Card	RSTC	Register Card for Analog Caller ID
DSS	DSS Console	SMDR	Station Message Detail Recording
DTI	Digital Trunk Interface Card	SW	Time Division Switch
DTG	Digital Tone Generator	TNT	Tone/Music Source Interface Card
ETHER	Ethernet Control Card	16CFT	16 Circuit Three/Four Party Conference Trunk
FP	Firmware Processor Card	VM00	Digital VMS with 4-Digital Ports
ICH	BRI Station Application Card	VM01	4 additional Digital Ports

Note: Refer to NAP-200-008 and the Circuit Card Manual for details of circuit cards.

2. SYSTEM CONFIGURATIONS

2.1 PIM Configuration

The PBX system can accommodate a maximum of 48 ports per PIM. A maximum of 88 ports are available with a two PIM configuration (PIM0 Slot LT08/AP4 used for PN-BS00).

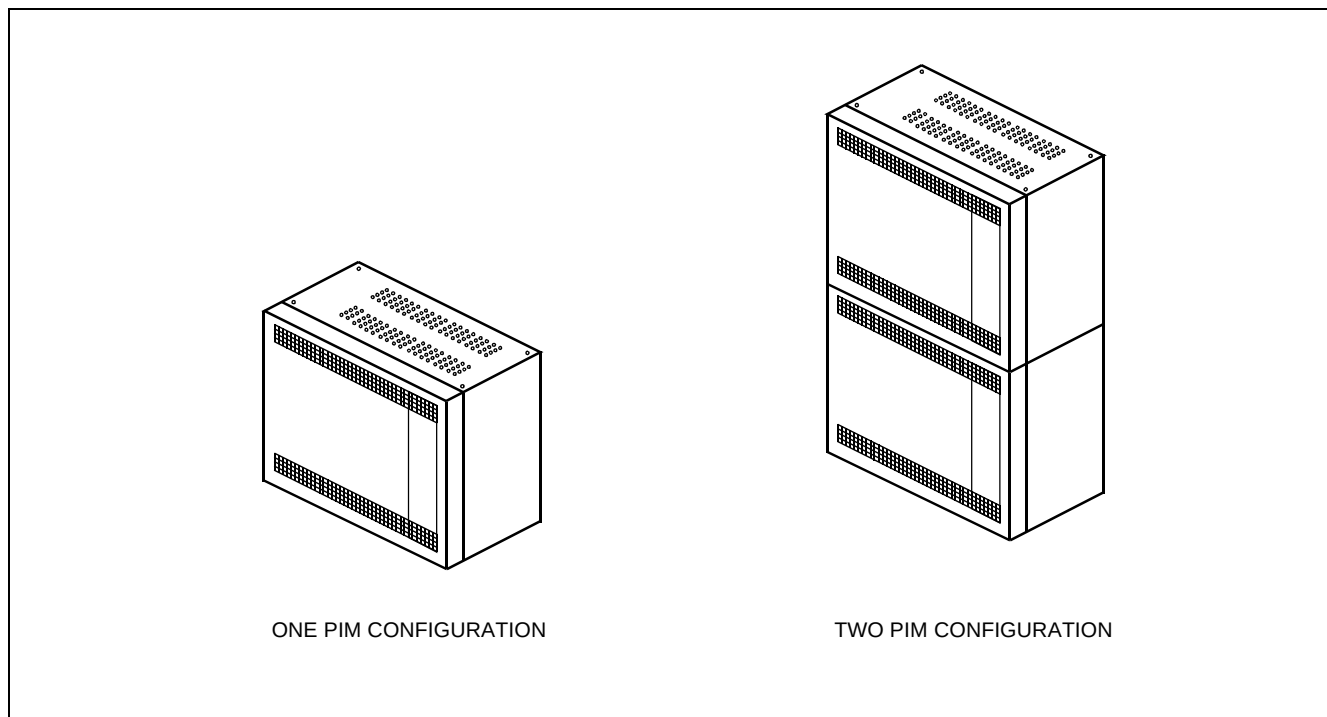


Figure 2-2 PIM Configuration

2.2 Installation Methods

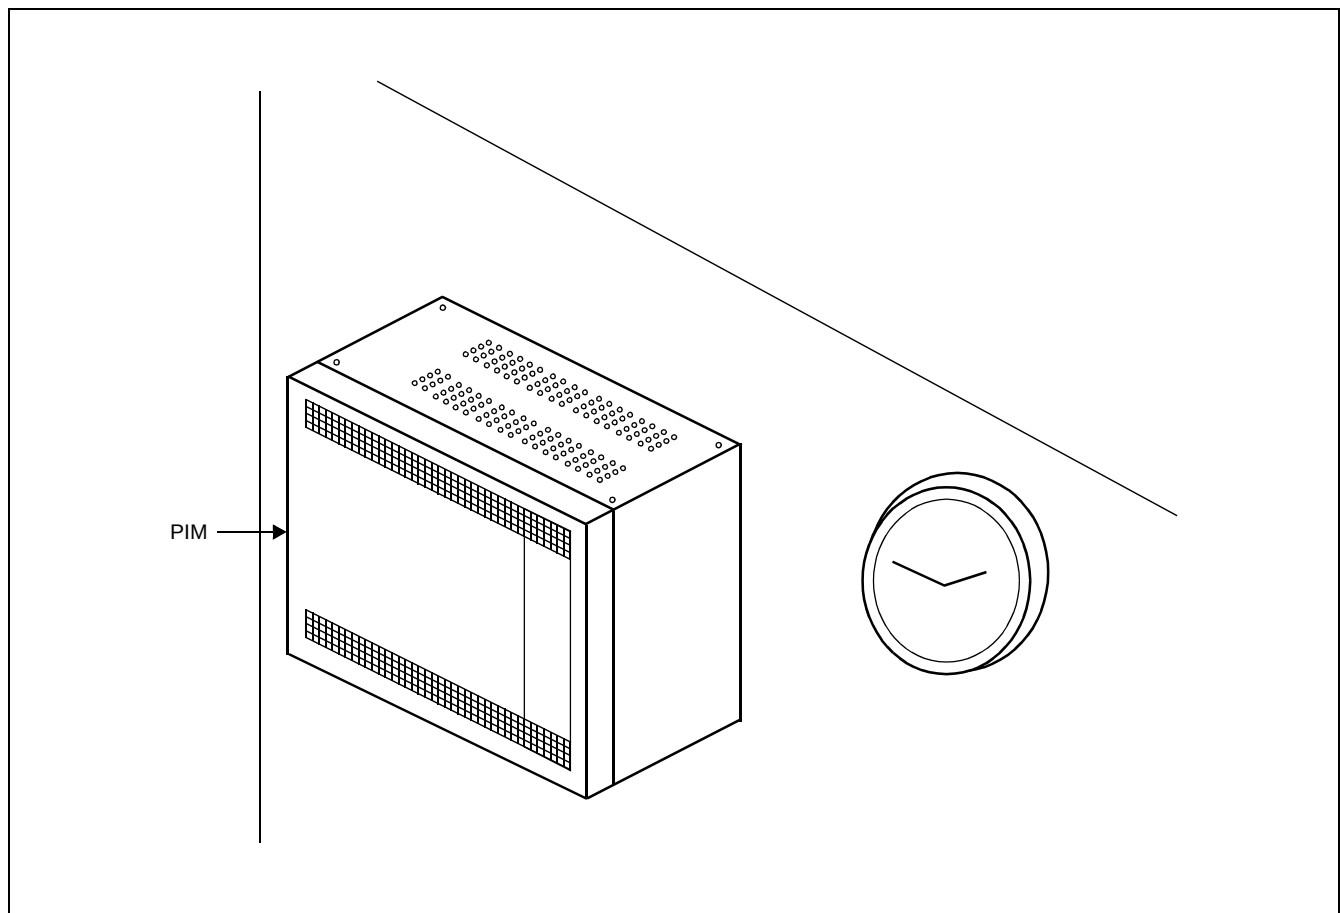


Figure 2-3 Wall-Mounting Installation

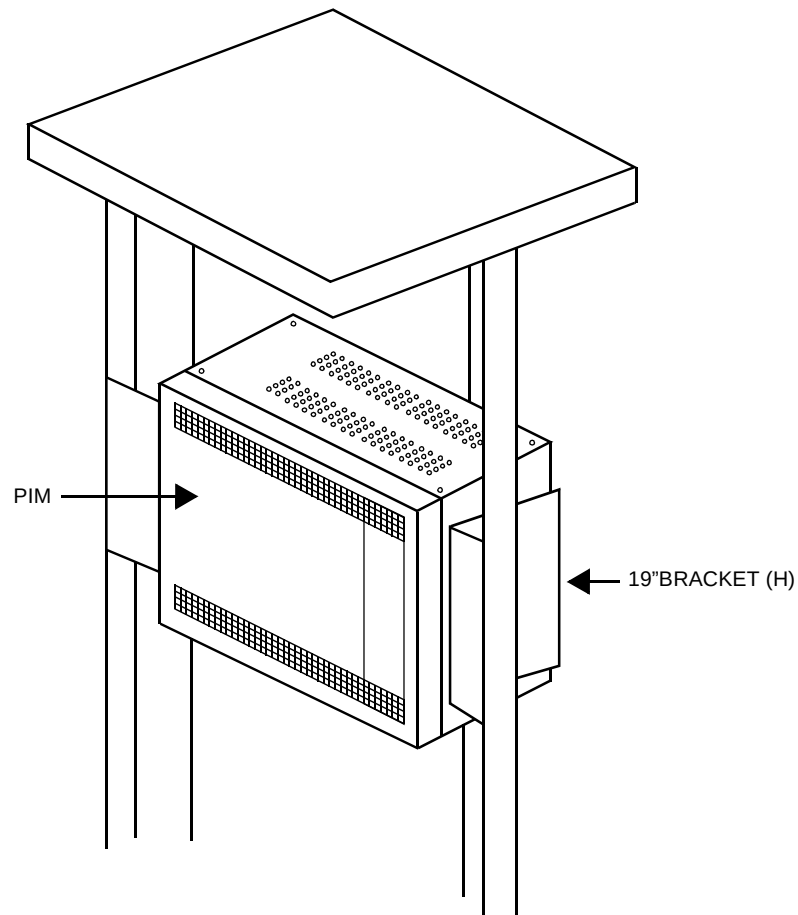


Figure 2-4 19-Inch Rack-Mounting Installation

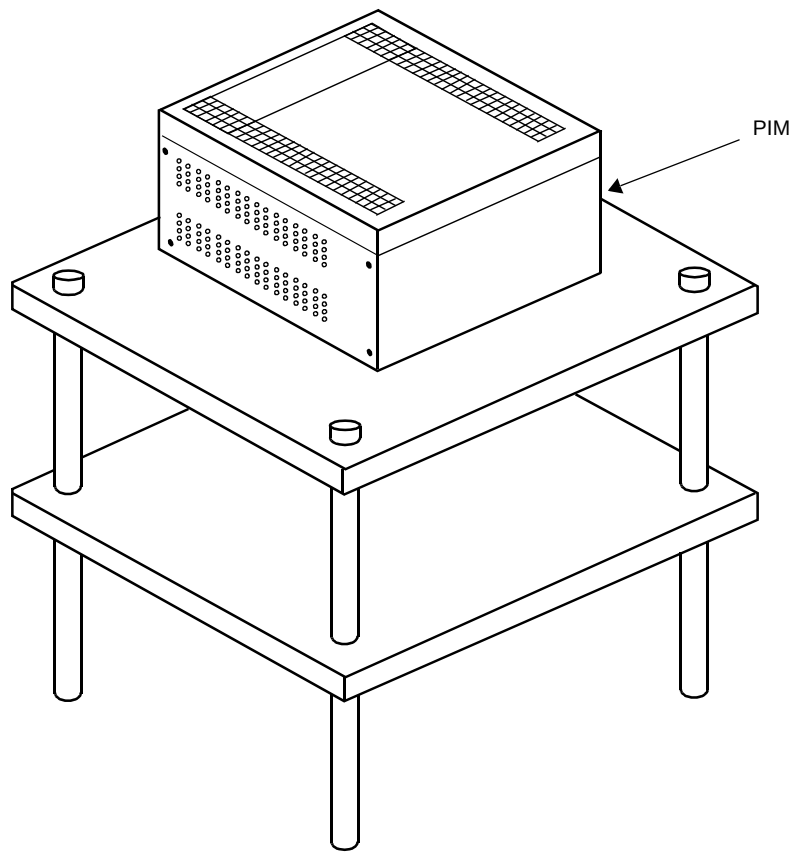


Figure 2-5 Desktop Installation

3. FUNCTIONAL OUTLINE OF EQUIPMENT

This section explains the functional outline of the equipment (modules, installation hardware, circuit cards) used in the PBX.

3.1 Functional Outline of Modules

Table 2-2 shows the functional outline of the modules.

Table 2-2 Functional Outline of Modules

MODULES	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
SN1420 PIMAB-A	PIM	Port Interface Module (PIM) A PIM provides 10 card slots for common control, Line/Trunk, and Application Processor (AP) cards. It also houses a AC/DC Power Supply and batteries for protection from short-term power interruption (standard). Two champ connectors for line/trunk (LTC0 to 1) and a connector for Power (PWR) are located at the lower front side of the PIM. A PIM provides a maximum of 9 card slots for line/trunk (LT) cards. At maximum configuration, the system is comprised of 2 PIMs and it provides 88 physical ports (48 ports x 2) to MDF (PIM0 Slot LT8/AP4 used for PN-BS00).

3.2 Functional Outline of Installation Hardware

Table 2-3 shows the functional outline of installation hardware.

Table 2-3 Functional Outline of Installation Hardware

INSTALLATION HARDWARE	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
COVER PARTS	TOP BOTTOM COVER	Bottom Cover (includes Top Cover) This hardware (bottom cover and top cover) is used for all NEAX1000 installations. A 4-rubber foot is required for desktop installation with PIM.
19" BRACKET	19" BRACKET	19-inch Bracket The 19-inch bracket is sets of hardware to mount the PIM in IEC standard 19-inch rack. One set of 19-inch bracket is required for PIM.

3.3 Functional Outline of Circuit Cards

3.3.1 Control Circuit Card

Table 2-4 shows the functional outline of each control circuit cards.

Table 2-4 Functional Outline of Control Circuit Cards

CARD NAME	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
PN-CP03	MP	Main Processor Card This card is equipped with Memory, TDSW (1024CH × 1024CH), 16-Line CFT, DTMF Sender, Clock, PLO (receiver mode 2 ports), RS-232C Ports (2 ports) for MAT/Built-in SMDR, modem for remote maintenance, and Music-On-Hold tone source (Melody IC/TNT), 4-circuit PBR (for PB calling or DID). This card is used on the basis of one per system.
PZ-PW86	PWR	Main Power Supply Card Input: AC 120 V (50 Hz/60 Hz) Output: -27 V (4.5 A), +5 V (7.5 A) One card is mounted in PIM. Note: This card does not provide ring generator or message wait voltage.
PZ-PW112	PWR	Main Power Supply Card Input: AC 120 V (50 Hz/60 Hz) Output: -27 V (3.5 A), +5 V (4.0 A) One card is mounted in PIM. Note: This card does not provide ring generator or message wait voltage.
PN-BS00-B	BS00	Bus Interface Card for PIM0 This card is equipped with functions of driver/receiver of various signals, functions of adjusting gate delay timing and cable delay timing, functions of monitoring I/O Bus and PCM Bus, and functions of controlling power supply. When the system consists of two PIMs, this card is mounted one in PIM0
PN-BS01-B	BS01	Bus Interface Card for PIM1 This card is equipped with functions of driver/receiver of various signals, functions of adjusting gate delay timing and cable delay timing, functions of monitoring I/O Bus and PCM Bus, and functions of controlling power supply. When the system consists of two PIMs, this card is mounted one in PIM1.
SPN-DAIB	DAIB	Firmware Processor-Bus Card—With T1 Used when installing PIM as a Remote PIM
SPN-DAIC	DAIC	Firmware Processor-Bus Card—With T1 Used when installing PIM as a remote PIM expanded to 43 ports.

3.3.2 Application Circuit Cards

Table 2-5 shows the functional outline of each application circuit card.

Table 2-5 Functional Outline of Application Circuit Cards

CARD NAME	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
SPN-AP00-A	AP00	Application Processor Card This card is equipped with four RS-232C ports, and is used for SMDR, H/M Printer, PMS functions and MCI. This card is used on the basis of one per system.
SPN-AP01	AP01	Application Processor Card This card is equipped with one RS-232C port and one Ethernet interface port, and is used for OAI function. Also, this card is used to expand authorization code and ACD. This card is used on the basis of one per system.
SPN-BRTA	BRI	Basic Rate (2B+D) Interface Trunk Card (S/T Interface) This card has one circuit of Basic Rate interface and provides one 2-channel PCM digital line.
SPN-ME00	EXTMEM	Memory Expansion Card This card is used with PN-AP00-A card for providing expansion memory. This card can be equipped with an expansions SRAM card (1MB) as SMDR data memory.
SPN-CC00	ETHER	Ethernet Control Card This card is used with the PN-AP01 card to accommodate the Ethernet, transmitting/receiving a signal of TCP/IP protocol.
SPN-CK00	PLO	Phase Locked Oscillator Card This card is a phase locked oscillator for providing a synchronized clock signal with the network. This card is used when the PBX is a master office or when the PBX requires two clock supply routes and those frequencies differ.
SPN-24DTA/ SPN-24DTA-A	DTI	Digital Trunk Interface (23B+D, 1.5 Mbps) Card This card accommodates 24-channel, PCM digital lines.
SPN-4RSTB	MFR	4-line MF Receiver Trunk card This card is used for MF Signaling on Digital DID trunks. A maximum of four cards can be provided per one system, including the PN-4RSTC card.
SPN-4RSTC	CIR	4-line CALLER ID Receiver Trunk Card This card is used for CALLER ID (CLASS SM) on analog trunks. A maximum of four cards can be provided per one system, including the PN-4RSTB card.
SPN-SC00	CCH	Common Channel Handler Card This card transmits/receives signals on the common signaling channel of No. 7 CCIS.
SPN-SC01	DCH	D-channel Handler Card This card transmits/receives signals on the D channel of ISDN Primary Rate (23B+D).
SPN-SC02	ICH	ISDN-channel Handler Card This card provides the D channel signaling interface and controls an ILC (Layer 2 and 3). Provides signaling interface for two ILCA cards.

Table 2-5 Functional Outline of Application Circuit Cards (Continued)

CARD NAME	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
SPN-DAIA	DAIA	Firmware Processor Bus Card—With T1 Used in main system when connecting to Remote PIM SPN-DAIB.
SPN-4RSTB-911	MF-911	Provides MF signaling for Enhanced 911.
SPN-SC03	CSH	Channel Handler for Zone Transceivers
SPN-SC03	ICH	ISDN-BRI Channel Handler Provides D-channel signaling interface for four ILCA cards.

3.3.3 Line/Trunk Circuit Cards

Table 2-6 shows the functional outline of each line/trunk circuit card.

Table 2-6 Functional Outline of Line/Trunk Circuit Cards

CARD NAME	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
PN-2AMPA	AMP	2-line Amplifier Trunk Card This card equipped with the functions of Echo Cancellor (EC), Automatic Gain Controller (AGC) and Tone Disabler (TD).
PN-AUCA	AUC	2-line Long-Line Circuit Card provided with the Power Failure Transfer (PFT) function line resistance in the case of a long-line circuit: Max. 2500 ohms (inclusive of the internal resistance of the distant office equipment) This card is internally equipped with a –48 V DC On-Board Power Supply. This card can also be used as a 2-line Direct Inward Dialing trunk card.
PN-CFTA	CFT	Conference Trunk Card Use of one card:Can control a conference of up to six participants. Use of two cards:Can control a conference of up to ten participants.
PN-4COTB	COT	4-line Central Office Trunk Card (ground-start/loop-start trunk) equipped with the functions for loop detection, sending/detecting ground on Ring/Tip wire
PN-4COTG	COT	4-line Central Office Trunk Card (loop-start trunk) equipped with the functions for loop detection, receiving/sending the Caller ID (CLASS SM) signal
PN-8COTM	COT	8-line Central Office Trunk Card (loop-start trunk only) No loop disconnect detection is provided.
PN-8COTP	COT	8-line Central Office Trunk Card (loop-start trunk only) loop disconnect detection is provided.
PN-2CSIA	CSIA	2-Line Zone Transceiver Card
PN-2DATA	DAT	2-line Digital Announcement Trunk Card Duration: Max. 60 seconds.

Table 2-6 Functional Outline of Line/Trunk Circuit Cards (Continued)

CARD NAME	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
PN-4DITB	DIT	4-line Direct In-Dialing Trunk Card This card is equipped with the function for loop detection, sending reverse signal and PB to DP signal conversion. This card is internally equipped with –48 V DC On-Board Power supply.
PN-DK00	DK	Circuit card for External Relay Control/External Key Scan This card is provided with eight circuits, and can provide the above-mentioned control functions on a per circuit basis.
PN-4DLCA/ PN-4DLCM	DLC	4-line Digital Line Circuit card for Multiline Terminal Series E/Elite/Series III/ ElectraPro/DSS Console (–27 V Version, 2-wire type) Note This card is equipped with quick diagnostics to detect short line conditions and the normality (Synchronous/Asynchronous) of the terminal.
PN-2DLCB/ PN-2DLCN	DLC	2-line Digital Line Circuit Card for Multiline Terminal Series E/Series III/DSS Console/ DESKCON (–48V Version, 2-wire type) Note This card is equipped with quick diagnostics to detect short line conditions and normality (Synchronous/Asynchronous) of terminal. This card is internally equipped with a –48 V DC On-Board Power Supply.
PN-2DLCC	DLC	2-line Digital Line Circuit Card for Multiline Terminal Series II/SN610 Attendant Console (–48 V Version, 4-wire type) Note This card is equipped with quick diagnostics to detect short line conditions and the normality (Synchronous/Asynchronous) of the terminal. This card is internally equipped with –48 V On-Board Power Supply.
PN-4DLCD/ PN-4DLCQ	DLC	4-line Digital Line Circuit Card exclusively used for Multiline Terminal Series E/Series III/DSS Console/DESKCON (–27 V Version, 2-wire type) Note This card is equipped with quick diagnostics to detect short line conditions and the normality (Synchronous/Asynchronous) of the terminal.
PN-4DLCF	DLC	4-line Digital Line Circuit Card for Multiline Terminal Series II/SN610 Attendant Console (–27 V Version, 4-wire type) Note This card is equipped with quick diagnostics to detect short line conditions.
PN-8DLCJ/ PN-8DLCP	DLC	8-line Digital Line Circuit Card for Multiline Terminal Series E/Series III/DSS Console/ DESKCON (–27 V Version, 2-wire type) Note
PN-2DPCB	DPC	2-line Data Port Controller Card This card is used for the intra-office or inter-office digital data transmission on fixed path connection. This card can accommodate a maximum of two DTE with V.11 (X.21) interface or V.24/V.28 (RS-232C) interface.
PN-2ILCA	ILC	2-line ISDN Line Circuit Card This card provides a physical interface to ISDN Terminals.
PN-4LCD-A	LC	4-line Analog Line Circuit Card for single line telephones Loop resistance: Max. 600 ohms This card is equipped with the function for controlling Message Waiting Lamp. Each 4 circuits are equipped with momentary open function. This card is equipped with quick diagnostics to detect short and open line conditions. This card is internally equipped with a +80 V DC-DC Power Supply circuit.

Table 2-6 Functional Outline of Line/Trunk Circuit Cards (Continued)

CARD NAME	FUNCTIONAL NAME	FUNCTIONAL OUTLINE
PN-8LCS	LC	8-line Analog Line Circuit Card for single-line telephones Loop resistance: Max. 600 Ω This card is equipped with a controller for momentary open function.
PN-M03	M03	V.35 DTE Interface Card This card is used together with the PN-2DPCB card to provide the V.35 interface.
PN-2ODTA	ODT	2-line OD Trunk Card This card can be used as either a 2-wire E&M trunk or a 4-wire E&M trunk, and is internally equipped with a -48 V DC On-Board Power Supply. Both No. 0 and No. 1 circuits must be set to same purpose (2-wire or 4-wire) in one card.
PN-PW00	PWR	Provides -48V power for one DeskCon or two zone transceivers; maximum is 3 per system; uses two card slots
PN-8RSTA	PBR	8-line DTMF Receiver Card This card can be used for a DTMF station line, DID or tie line.
PN-TNTA	TNT	2-line Tone/Music Source interface Card This card is used for BGM or Music on Hold, and is equipped with two interface for an external tone/music source.
PZ-VM00	4VM	4-Port Voice Mail Card (NEAX Mail AD-8)
PZ-VM01	4VMEXT	4-Port Expansion Card for AD-8 (VM00)

Note: The cable length between the DLC and terminal varies depending on the type of terminal. For the line conditions each terminal, refer to [Table 2-7](#).

Table 2-7 Line Condition of Each Terminals

TERMINAL TYPE	CARD TYPE	CABLE LENGTH (Cable 24AWG)	REMARKS
DTP-8-1	PN-8DLCJ / 8DLCP (STANDARD)	984ft. (300m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	984ft. (300m) [3937ft. (1200m)]	
	PN-2DLCB / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	
DTP-8D-1	PN-8DLCJ / 8DLCP (STANDARD)	984ft. (300m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	984ft. (300m) [3937ft. (1200m)]	
	PN-2DLCB / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	

Table 2-7 Line Condition of Each Terminals (Continued)

TERMINAL TYPE	CARD TYPE	CABLE LENGTH (Cable 24AWG)	REMARKS
DTP-16-1	PN-8DLCJ / 8DLCF (STANDARD)	656ft. (200m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	656ft. (200m) [3937ft. (1200m)]	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	
DTP-16D-1	PN-8DLCJ / 8DLCF (STANDARD)	656ft. (200m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	656ft. (200m) [3937ft. (1200m)]	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	
DTP-32-1	PN-8DLCJ / 8DLCF (STANDARD)	656ft. (200m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	656ft. (200m) [3937ft. (1200m)]	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	
DTP-32D-1	PN-8DLCJ / 8DLCF (STANDARD)	656ft. (200m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	656ft. (200m) [3937ft. (1200m)]	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	
DSS/BLF Console Note 2	PN-8DLCJ / 8DLCF (STANDARD)	984ft. (300m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	984ft. (300m)	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m)	
ETJ-8-1	PN-8DLCJ / 8DLCF (STANDARD)	984ft. (300m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	984ft. (300m) [3937ft. (1200m)]	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	
ETJ-16DC-1	PN-8DLCJ / 8DLCF (STANDARD)	656ft. (200m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	656ft. (200m) [3937ft. (1200m)]	
	PN-2DLCD / 2DLCN (LONG)	2788ft. (850m) [3937ft. (1200m)]	

Table 2-7 Line Condition of Each Terminals (Continued)

TERMINAL TYPE	CARD TYPE	CABLE LENGTH (Cable 24AWG)	REMARKS
ETJ-16DD-1	PN-8DLCJ / 8DLCP (STANDARD)	656ft. (200m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	656ft. (200m) [3937ft. (1200m)]	
	PN-2DLCB (LONG)	2788ft. (850m) [3937ft. (1200m)]	
ETJ-24DS-1	PN-8DLCJ / 8DLCP (STANDARD)	492ft. (150m)	Note 1
	PN-4DLCD / 4DLCQ (STANDARD)	492ft. (150m) [3937ft. (1200m)]	
	PN-2DLCB (LONG)	2788ft. (850m) [3937ft. (1200m)]	
SN610 ATTCON	PN-2DLCC (LONG)	3937ft. (1200m)	
	PN-4DLCP (STANDARD)	984ft. (300m)	
DESKCON	PN-4DLCD / 4DLCQ and PW00 or AC Adapter	1500ft. (457m)	Note 3
	PN-8DLCJ / 8DLCP and PW00 or AC Adapter	1000ft. (304m)	

* The value in the [] shows the cable length when using the long line function.

Note 1: When using PN-8DLCJ or PN-8DLCP card, it is not available long line function.

Note 2: The DSS/BLF Console requires local AC/DC power supply.

Note 3: With AC/DC power at DESKCON 3000' with 4DLCD

4. CIRCUIT CARD INSTALLATION CONDITIONS

4.1 Circuit Card Mounting Slots

Figure 2-6 shows circuit card mounting slots allocated in the PIM, on the basis of circuit card type.

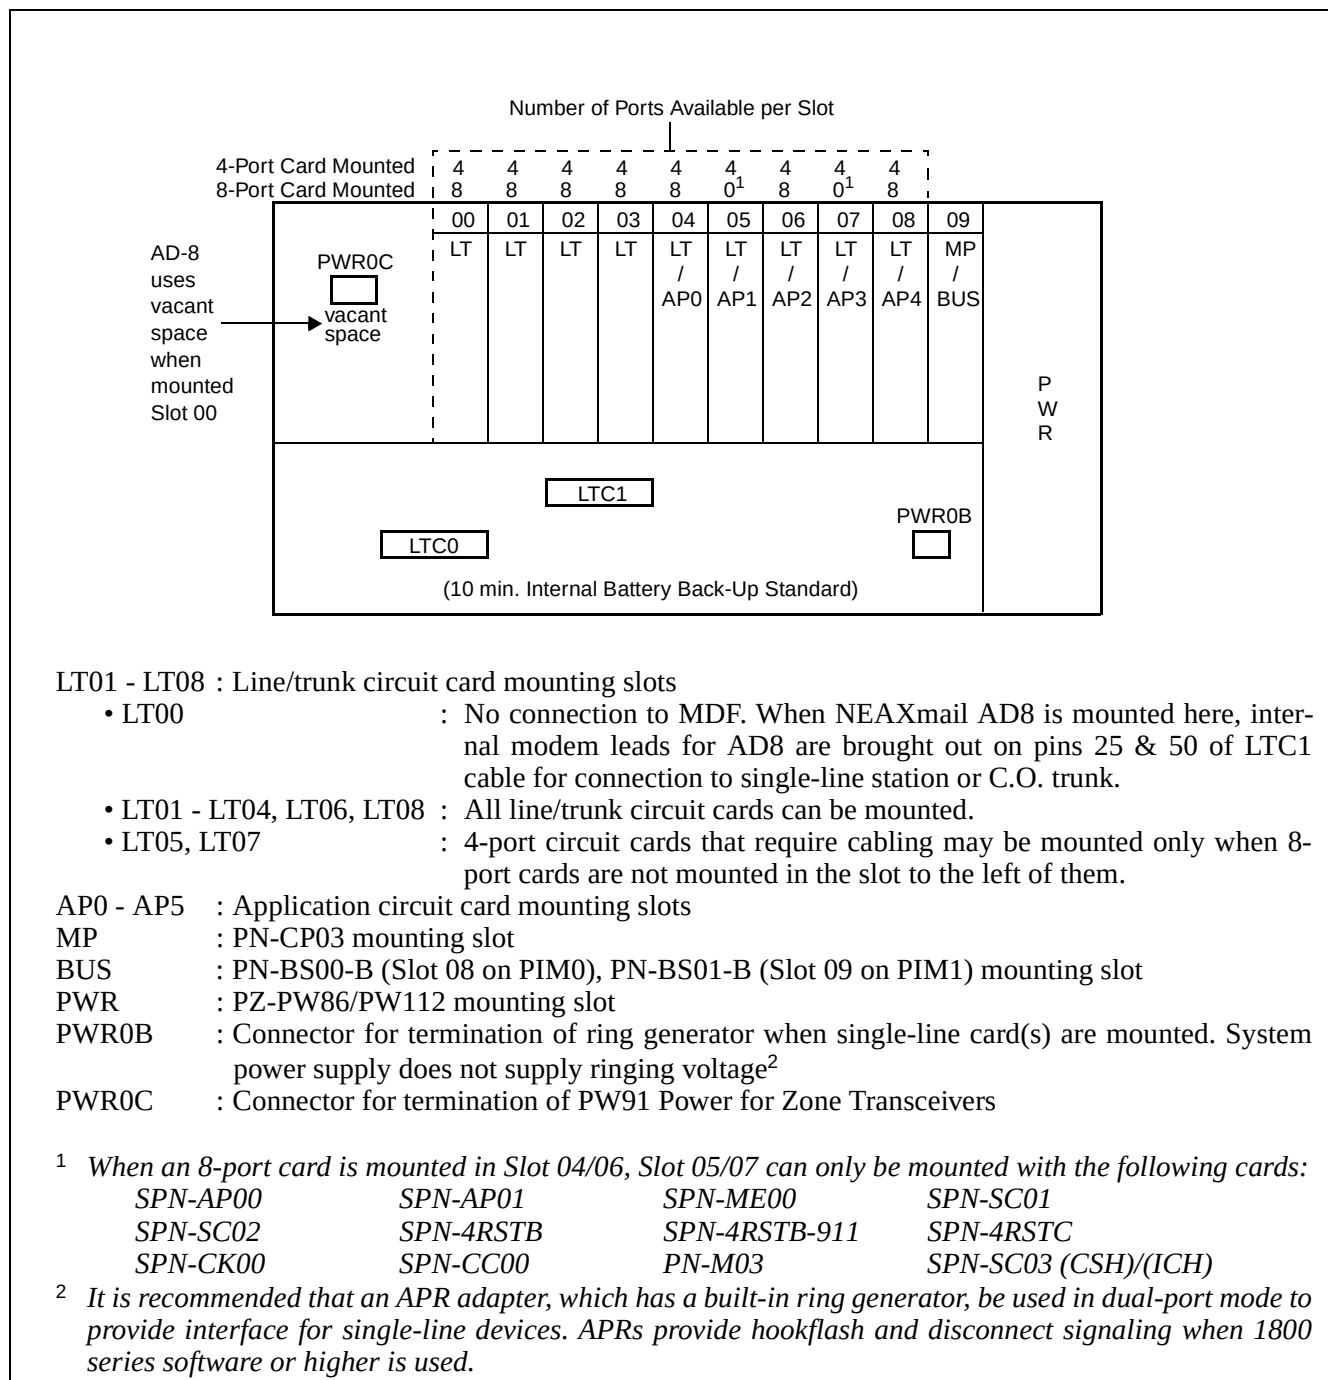


Figure 2-6 Circuit Card Mounting Slots

4.2 Installation Conditions

- (20) The application circuit cards PN-BRTA and PN-24DTA-A cannot be mounted in slots AP1 or AP3 when an 8-port card is mounted in Slot 04 or 06, since these slots share a connection to the MDF via the back-plane.
- (21) The application circuit card type PN-CC00 can be mounted in any LT/AP slot, but it occupies two slot positions; i.e. the slot immediately to its right must be vacant.
- (22) PN-PW00 can be mounted in any LT/AP slot or LT slot, but it occupies two slots; i.e., the slot immediately to its left must be vacant.
- (23) AD8 (PN-VM00) can be mounted in any LT or LT/AP slot, but it occupies three slots; i.e., the two slots immediately to its left must be vacant. It is recommended that LT00 be used when mounting the AD8 since the vacant space to its left is specifically provided for this purpose and only LT00 brings leads out for termination of the AD8 internal modem.

Note: *The PN-CC00 must be mounted adjacent to its related PN-AP01 card, in order to allow the connection of cable type 48-TW-0.3 CONN CA between these cards.*

CHAPTER 3 INSTALLATION PROCEDURE

1. PRECAUTIONS

1.1 Grounding Requirements

The system grounding must have a specific ground resistance and AC noise level, and is to be connected to a pre-determined terminal in the PBX. Standard grounding requirements are as follows:

- Communication grounding: Less than 10 ohm
- Protective ground for PIM: Less than 10 ohm

Note: *The AC ripple on these various grounds should be less than 0.5 Vp-p.*

CAUTION: Grounding circuit continuity is vital for safe operation of telecommunication equipment. Never operate this equipment with the grounding conductor disconnected.

1.2 Static Electricity Guard

The installer must wear a grounded wrist strap to protect circuit cards from static electricity.


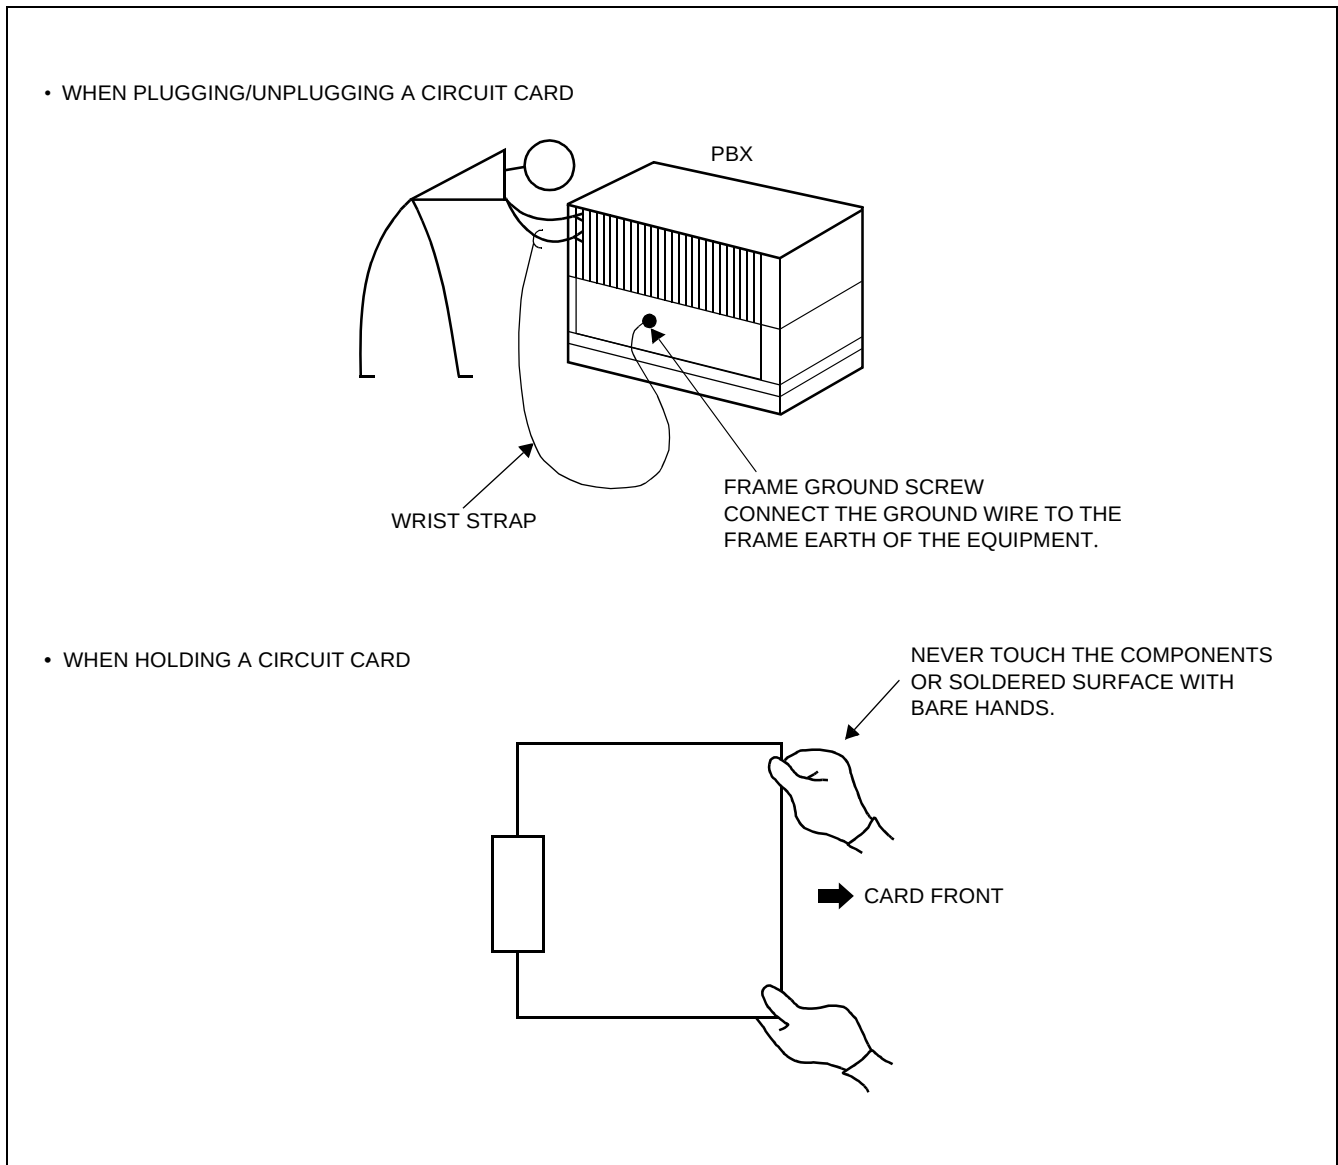


Figure 3-1 Static Electricity Guard

- WHEN MAKING A SWITCH SETTING ON A CIRCUIT CARD

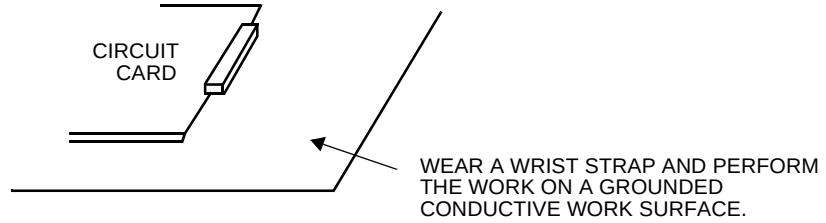

- WHEN CARRYING A CIRCUIT CARD

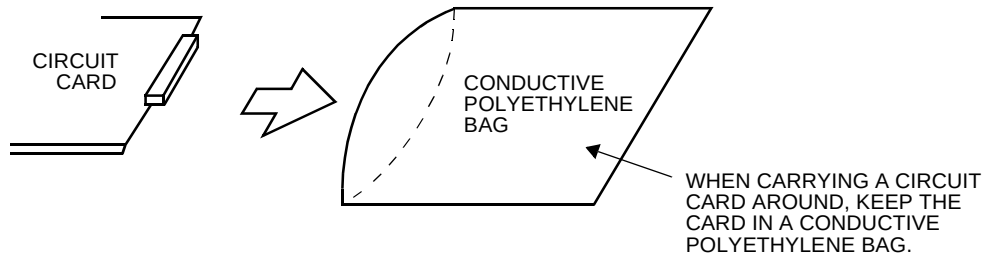


Figure 3-1 Static Electricity Guard (Continued)


1.3 Removing/Inserting Circuit Cards

When removing a circuit card from the PIM or when inserting a circuit card in the PIM, follow the procedure in [Table 3-1](#).

Table 3-1 Removing/Inserting Circuit Cards Procedure

CIRCUIT CARD	PROCEDURE		CONDITION
	INSERT	REMOVE	
• PN-CP03 (MP) • PZ-PW86 (PWR) • PZ-PW112 (PWR) • PN-PW00	Power off ↓ Insert ↓ Power on	Power off ↓ Remove ↓ Power on	Always insert or remove these circuit cards with power off to prevent damage to the card or other system circuitry.
• PN-AP00 (AP00) • PN-ME00 (EXTMEM) • PN-BRTA (BRT) • PN-BS00-B (BS00) • PN-BS01-B (BS01) • PN-CK00 (PLO) • PN-24DTA-A (DTI) • PN-4RSTB (MFR) • PN-4RSTC (CIR) • PN-SC00 (CCH) • PN-SC01 (DCH) • PN-SC02 (ICH) • PN-SC03 (ICH) • PN-SC03 (CSH) • PN-VM00	Power off or MB switch on ↓ Insert ↓ Power on or MB switch off	Power off or MB switch on ↓ Remove ↓ Power on	Always insert or remove these circuit cards under Make Busy condition or power off to prevent damage to the card or other system circuitry.
• PN-AP01 (AP01) • PN-CC00 (ETHER)	Refer to the OAI System Manual.		

CAUTION: Always hold the card name label area when inserting or removing a circuit card. Touching another area may result in exposure to hazard voltages.

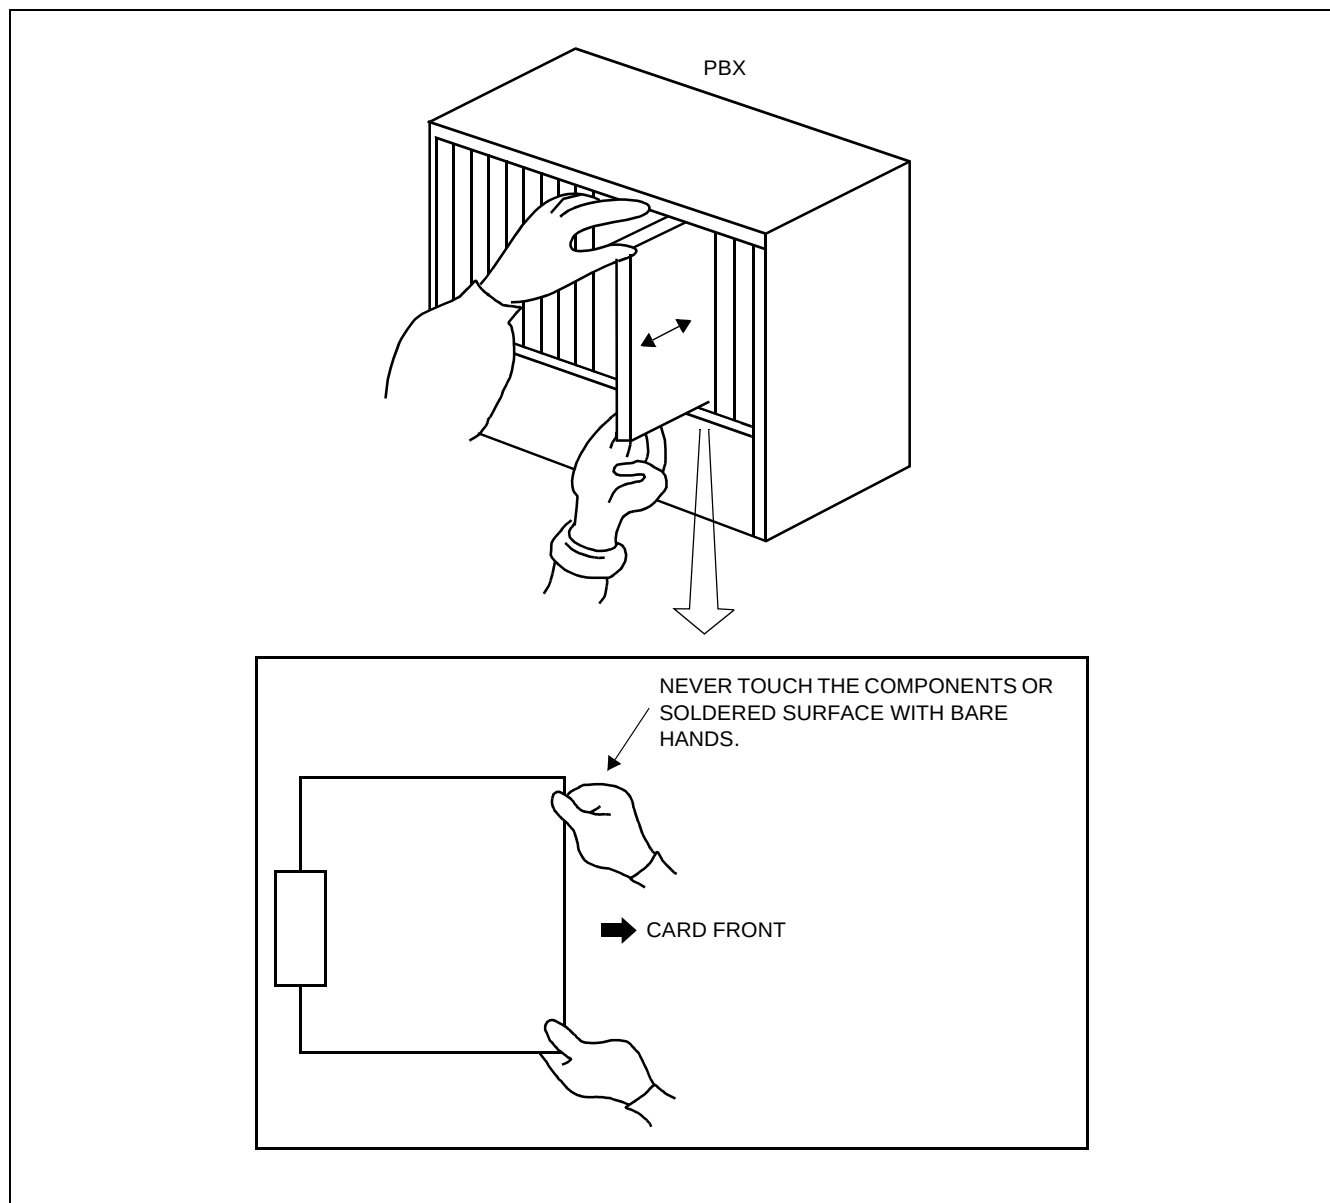

2. PROCEDURE

This section explains the procedures for installing the PBX system. The installer should follow the flowchart procedure shown in [Figure 3-2](#). In the flowchart, an NAP (NEC Action Procedure) Number, denoted on the right side of each action, refers to the details for each procedure.

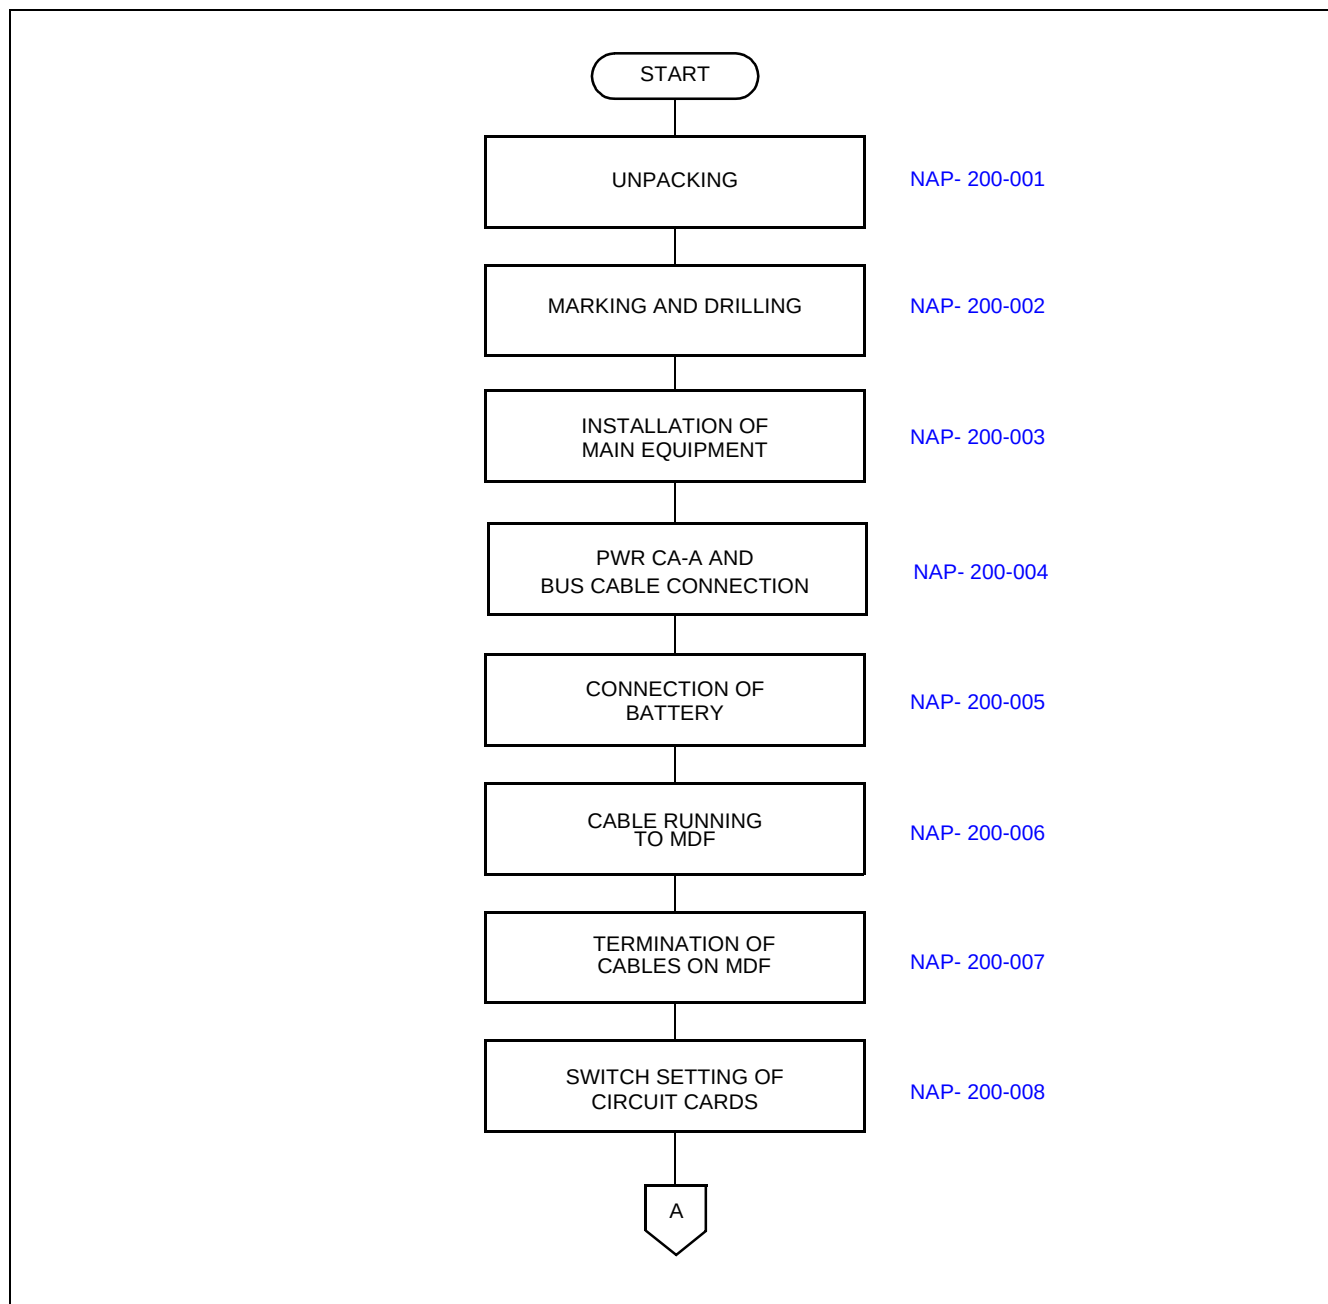


Figure 3-2 Procedure Flowchart

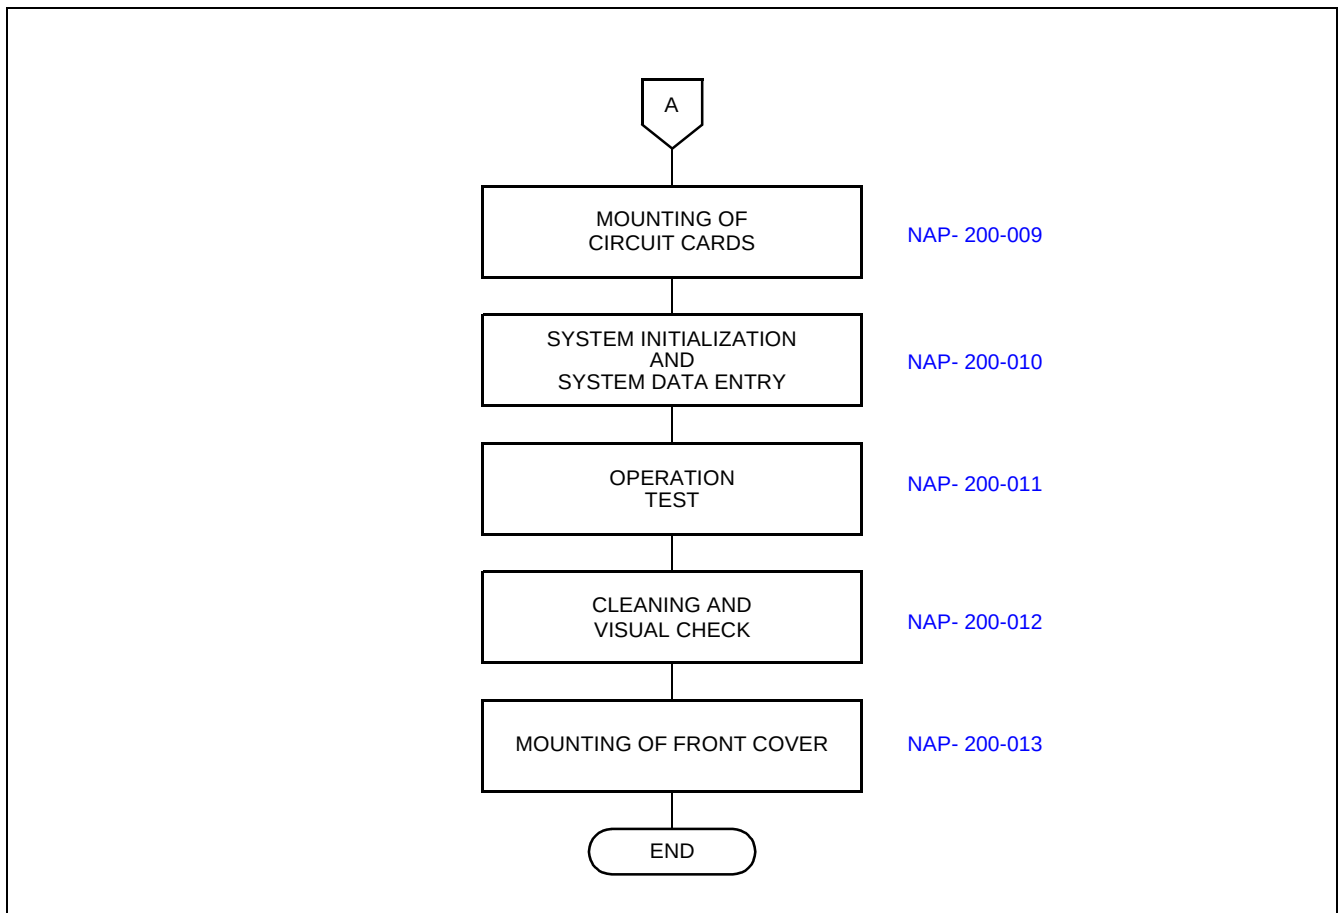


Figure 3-2 Procedure Flowchart (Continued)

The label, shown in [Figure 3-3](#), is attached to the NAP sheet for each procedure in which circuit cards are handled. When doing such a procedure, the installer must perform the procedure with caution, to prevent damage caused by static electricity (See Section [1.2 Static Electricity Guard](#) in this chapter).

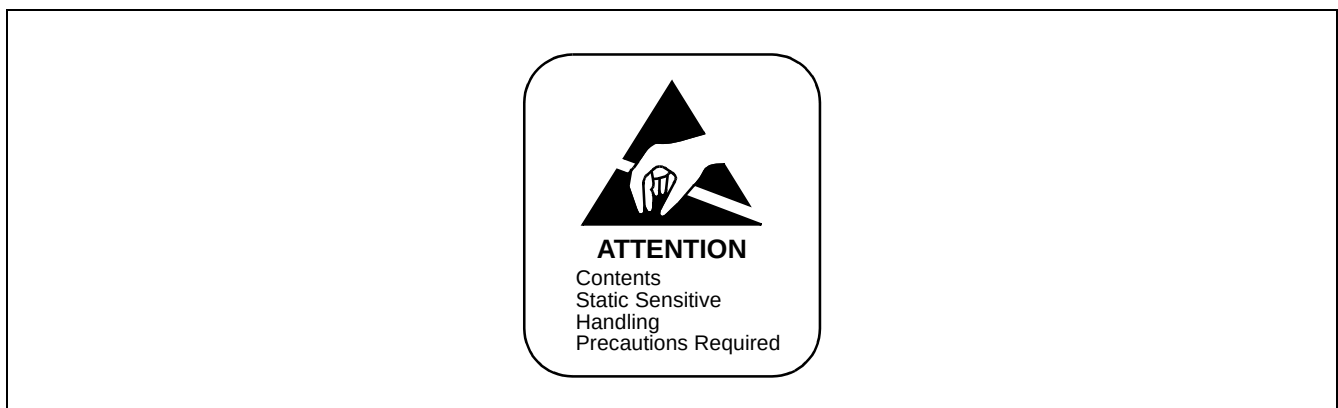


Figure 3-3 Static-Sensitive Caution Label

NAP-200-001
Sheet 1/2
Unpacking



1. UNPACKING PROCEDURE

- (1) Check the received quantity of packages containing the PBX system with the description on the shipping document.
- (2) Check the packaging for external damage done by transportation and record it as necessary.
- (3) Unpack the packaging (see [Figure 001-1](#)).
 - For unpacking the packages containing circuit cards, a grounded wrist strap should be worn.
- (4) Check the quantity of equipment and materials unpacked with the shipping document.
- (5) Perform visual inspection, checking for the following items:

- Modules
 - Overall distortion
 - Scratches and dents on the surface
 - Scratches and cracks on PIM Backplane
 - Broken or bent pins on PIM Backplane
- Covers
 - Scratches and dents
- Circuit Cards
 - Overall distortion
 - Scratches and cracks
 - Loss or damage of parts on circuit cards
- Attendant Console
 - Scratches and cracks on the keyboard
 - Overall distortion
 - Damage to keys and lamps

NAP-200-001
Sheet 2/2
Unpacking

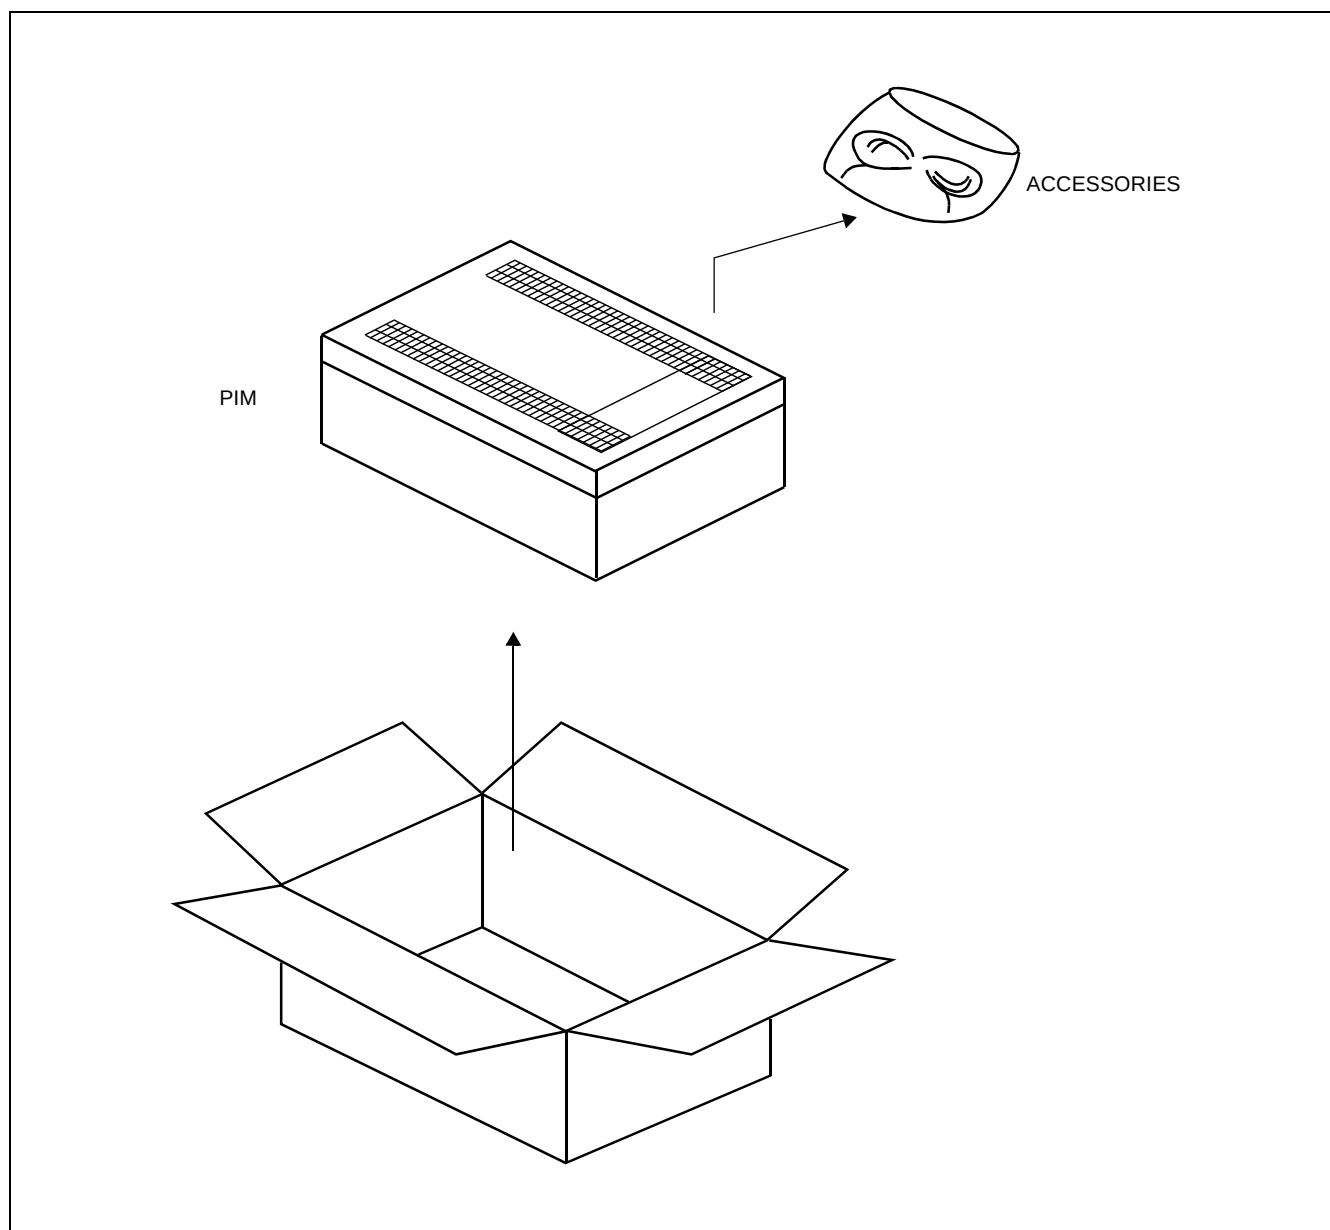


Figure 001-1 Unpacking Main Equipment

NAP-200-002
Sheet 1/2
Marking and Drilling

1. CONFIRMING EQUIPMENT LAYOUT

Install the equipment in an area that provides adequate ventilation and is easily accessible to service personnel.

2. MARKING

Locate and mark the wall mounting points as shown in [Figure 002-1](#).

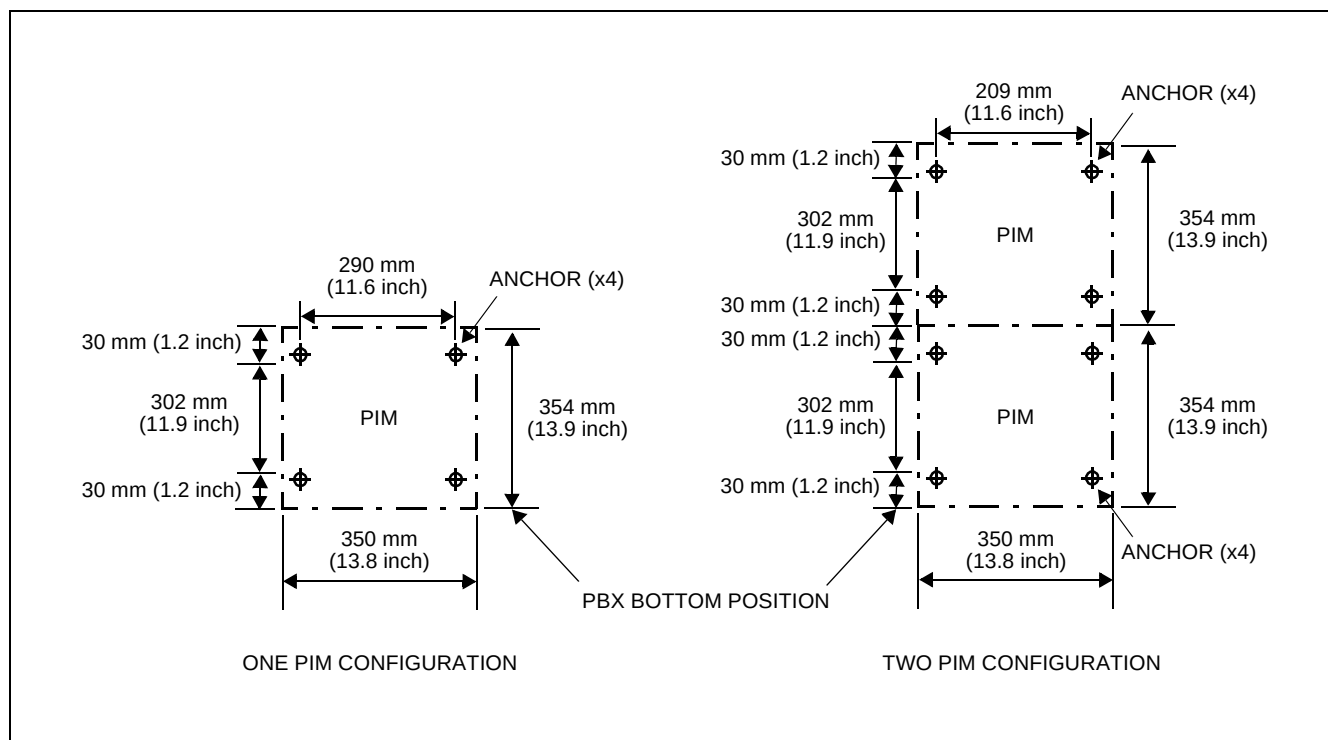


Figure 002-1 Wall Mounting Points

NAP-200-002
Sheet 2/2
Marking and Drilling

3. DRILLING

Install anchor bolts as shown in [Figure 002-2](#).

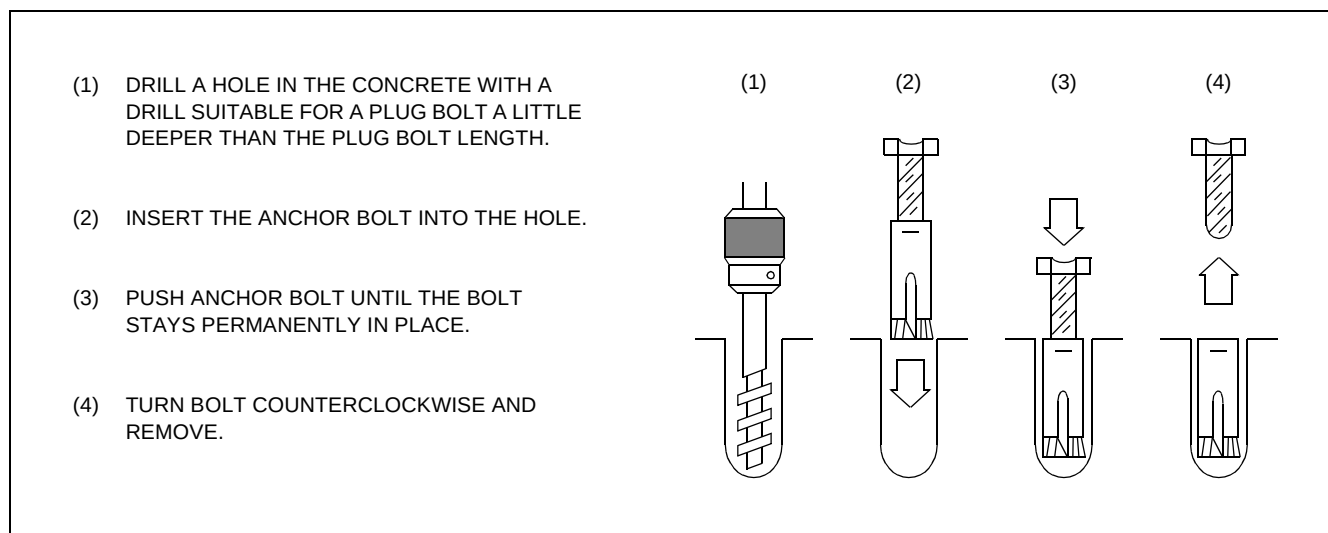


Figure 002-2 Installing Anchor Bolt

NAP-200-003
Sheet 1/12
Installation of Main Equipment

1. WALL-MOUNTING INSTALLATION

- (1) When the system is two PIM configuration, connect PIMs with three bolts provided.

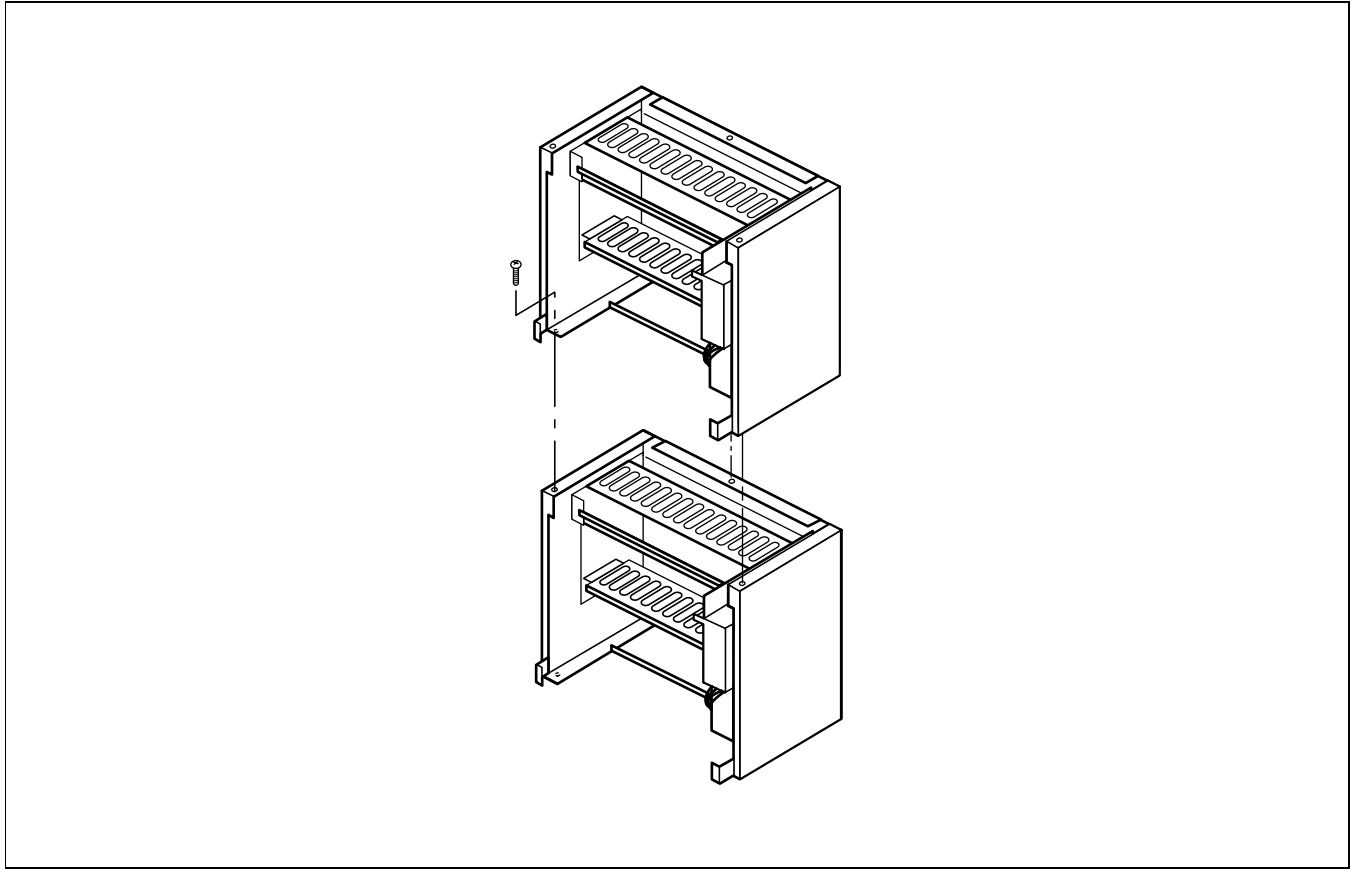


Figure 003-1 Connection of PIMs

NAP-200-003
Sheet 2/12
Installation of Main Equipment

- (2) Using appropriate fasteners (locally provided; see [Table 003-1](#)) for the type of wall constructions, secure the PIM to the wall. For the wall mounting points, refer to [Figure 002-1](#) in NAP-200-002.

Table 003-1 Recommended Fasteners

WALL TYPE	RECOMMENDED FASTENER
Plaster Board [Thickness Min. 9.6 mm (0.38 inch)]	Molly Anchor Type Min. 3.5 mm (0.14 inch) DIA Max. 4.5 mm (0.17 inch) DIA
Wood	Wood Type Screws Min. 3.5 mm (0.14 inch) DIA Max. 4.5 mm (0.17 inch) DIA
Concrete	Anchor Bolt Type Recommended 4 mm (0.16 inch) by 25 mm (0.98 inch)

Note: The wall types are listed in recommendation order. Concrete is the most secure. Plaster board is the least secure.

NAP-200-003
Sheet 3/12
Installation of Main Equipment

(3) After hanging PIM onto the wall, tighten each M4 machine screw using a phillips screw driver.

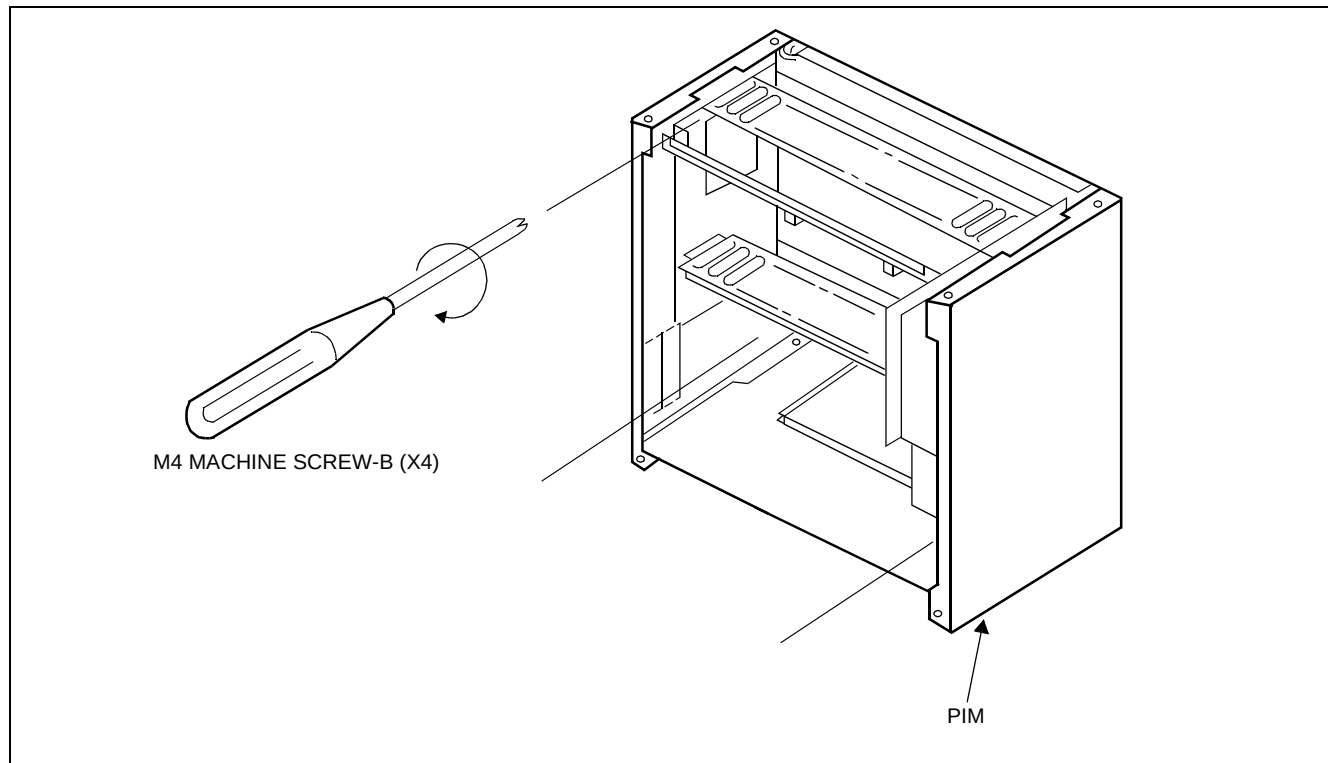


Figure 003-2 Screwing PIM to Wall

NAP-200-003
Sheet 4/12
Installation of Main Equipment

- (4) Connect the TOP COVER to the upper PIM with four screws, and connect the BOTTOM COVER to the lower PIM with four screws.

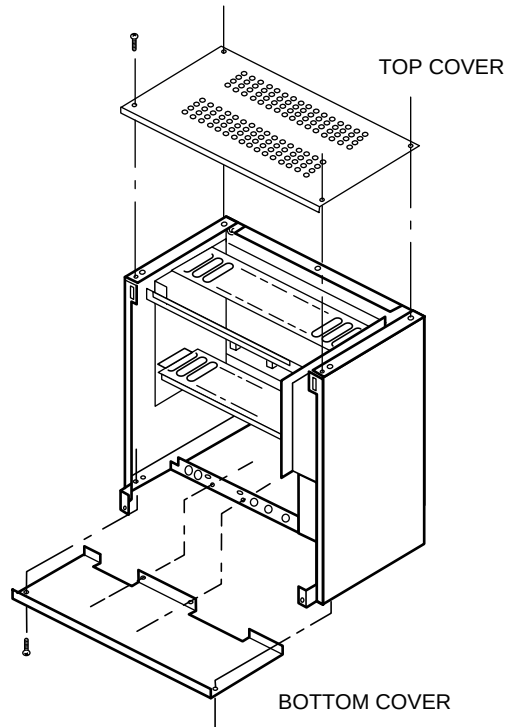


Figure 003-3 Connecting Covers

NAP-200-003
Sheet 5/12
Installation of Main Equipment

- (5) Connect the AC CORD-A-U to the AC INPUT connector on the PZ-PW86/PZ-PW112, and its FG cord to the FG terminal on the chassis.

After connection of AC CORD-A-U to the AC INPUT connector, let the cord out of the PIM through the cable hole provided with bottom of the PIM.

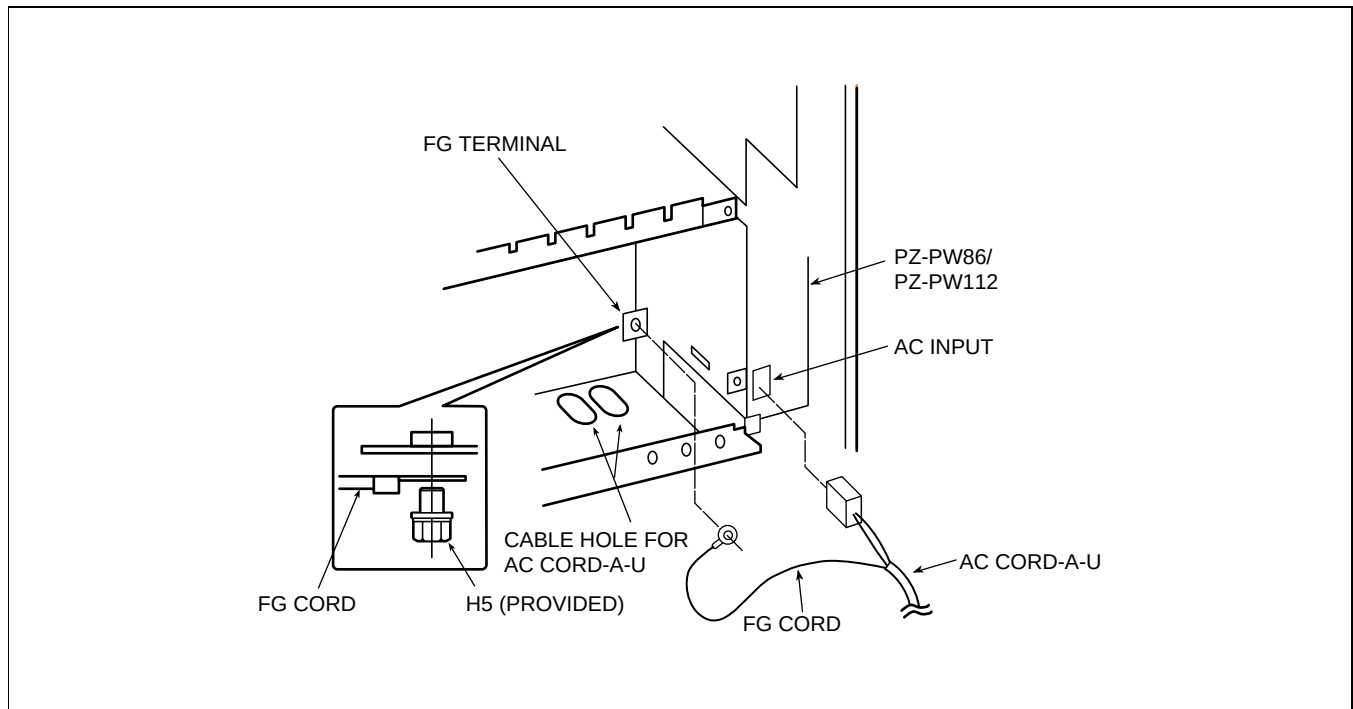


Figure 003-4 Connecting AC CORD to PIM

NAP-200-003
Sheet 6/12
Installation of Main Equipment

2. 19-INCH RACK-MOUNTING INSTALLATION

- (1) When the system is two PIM configuration, connect PIMs with three bolts as shown in Figure 003-1.
- (2) Before mounting the PIM, connect the TOP COVER, BOTTOM COVER and AC CORD-A-U to the PIM as shown in [Figure 003-3](#) and [Figure 003-4](#).
- (3) Secure the 19" BRACKET (H) to the 19-inch Rack as shown in [Figure 003-5](#) (A).
- (4) Mount the PIM on the 19" BRACKET (H) as shown in [Figure 003-5](#) (B).
Then, secure the PIM to the 19" BRACKET (H) as shown in [Figure 003-5](#) (C).

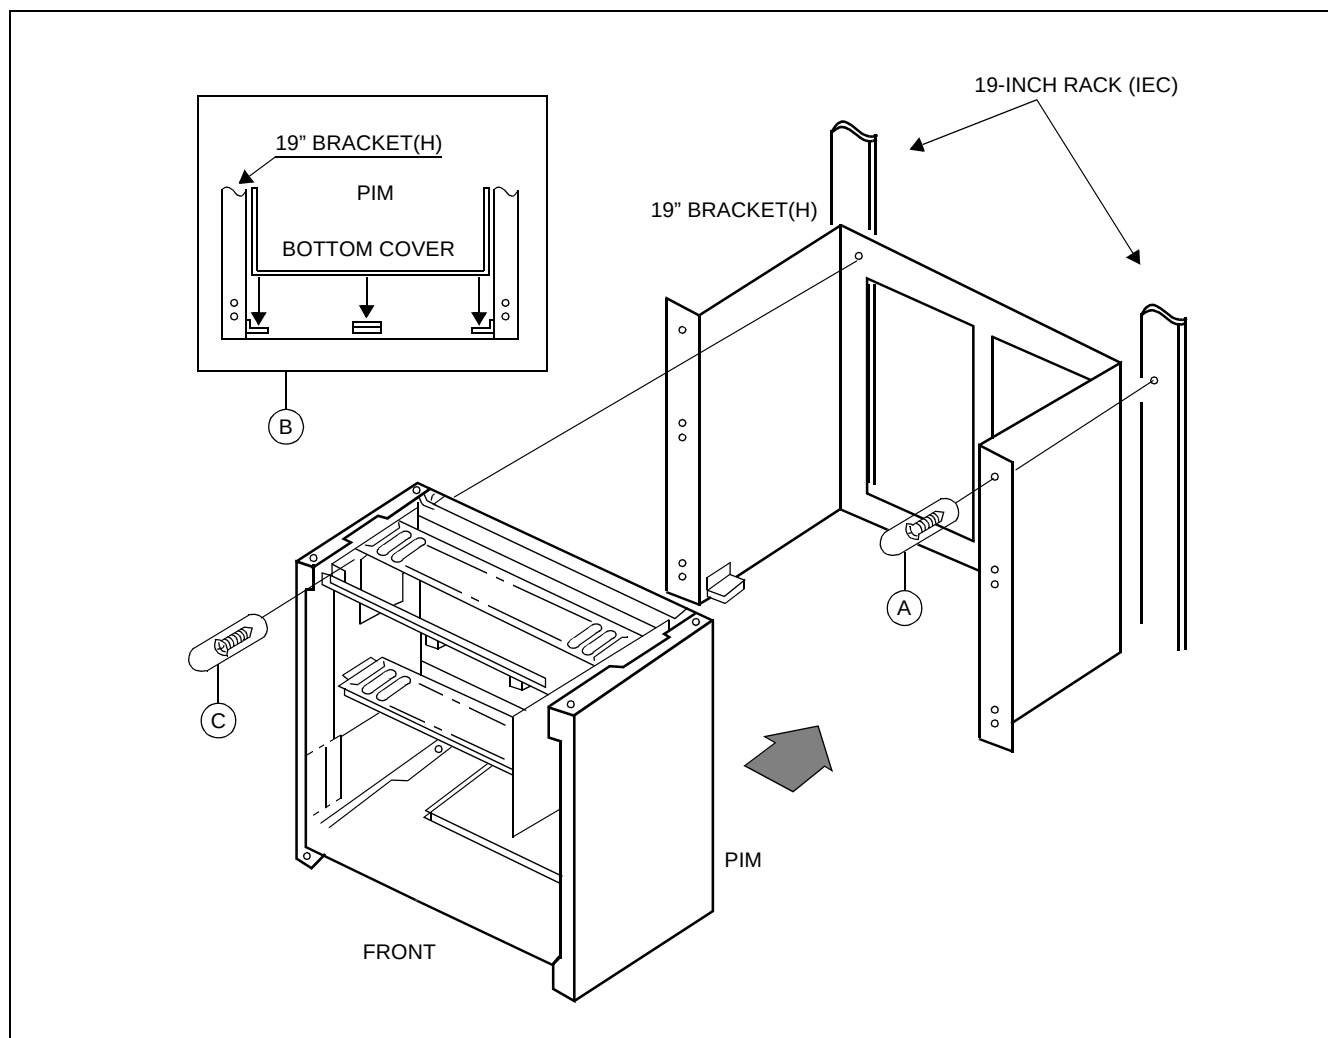


Figure 003-5 Mounting PIM to 19-Inch Rack

NAP-200-003
Sheet 7/12
Installation of Main Equipment

3. DESKTOP INSTALLATION

- (1) When the system is two PIM configuration, connect PIMs with three bolts as shown in [Figure 003-1](#).
- (2) Connect the TOP COVER, BOTTOM COVER and AC CORD-A-U to the PIM as shown in [Figure 003-3](#) and [Figure 003-4](#).
- (3) Screw the RUBBER FOOT to the PIM as shown in [Figure 003-6](#).

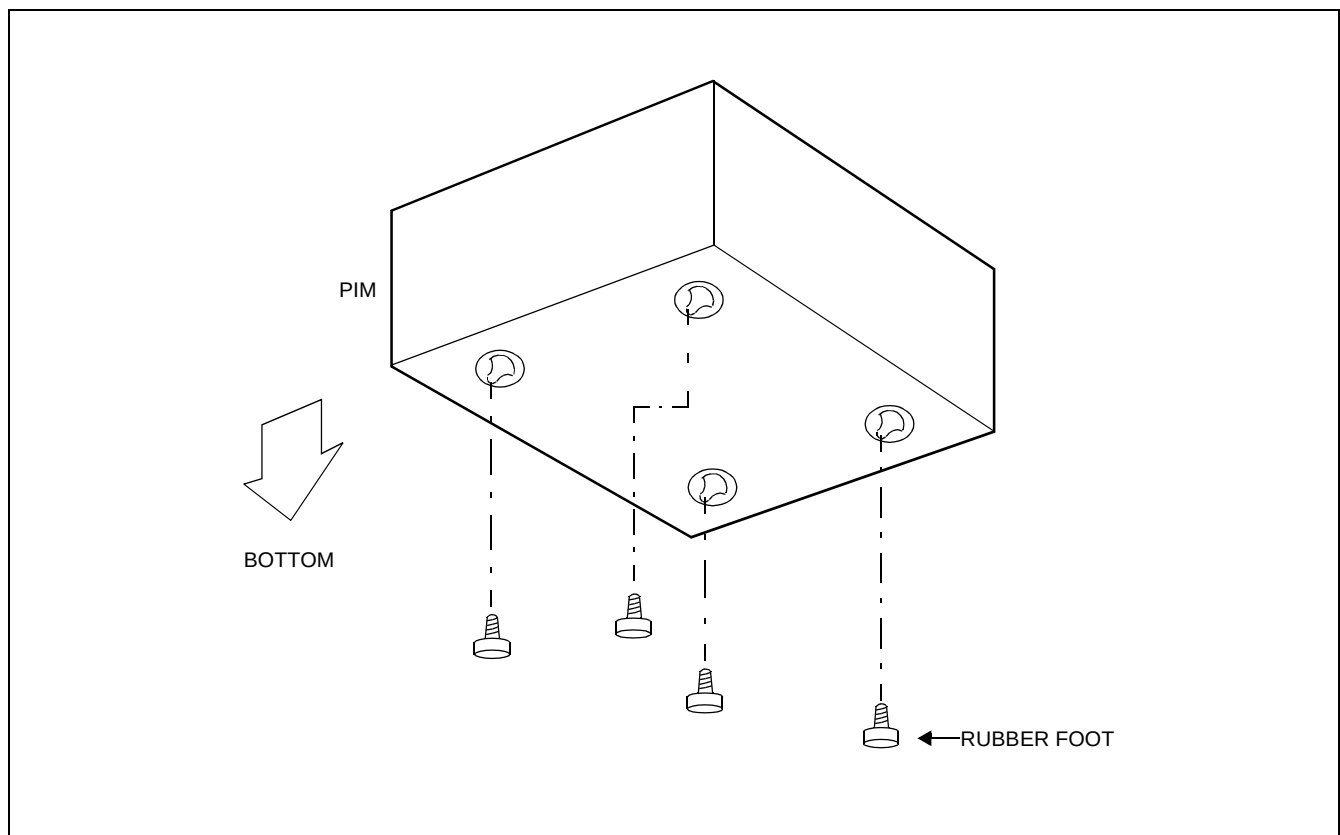


Figure 003-6 Connecting Rubber Foot to PIM

NAP-200-003
Sheet 8/12
Installation of Main Equipment

4. AC POWER CABLING

(1) The cable connections on the PZ-PW86/PW112 card are shown in [Figure 003-7](#).

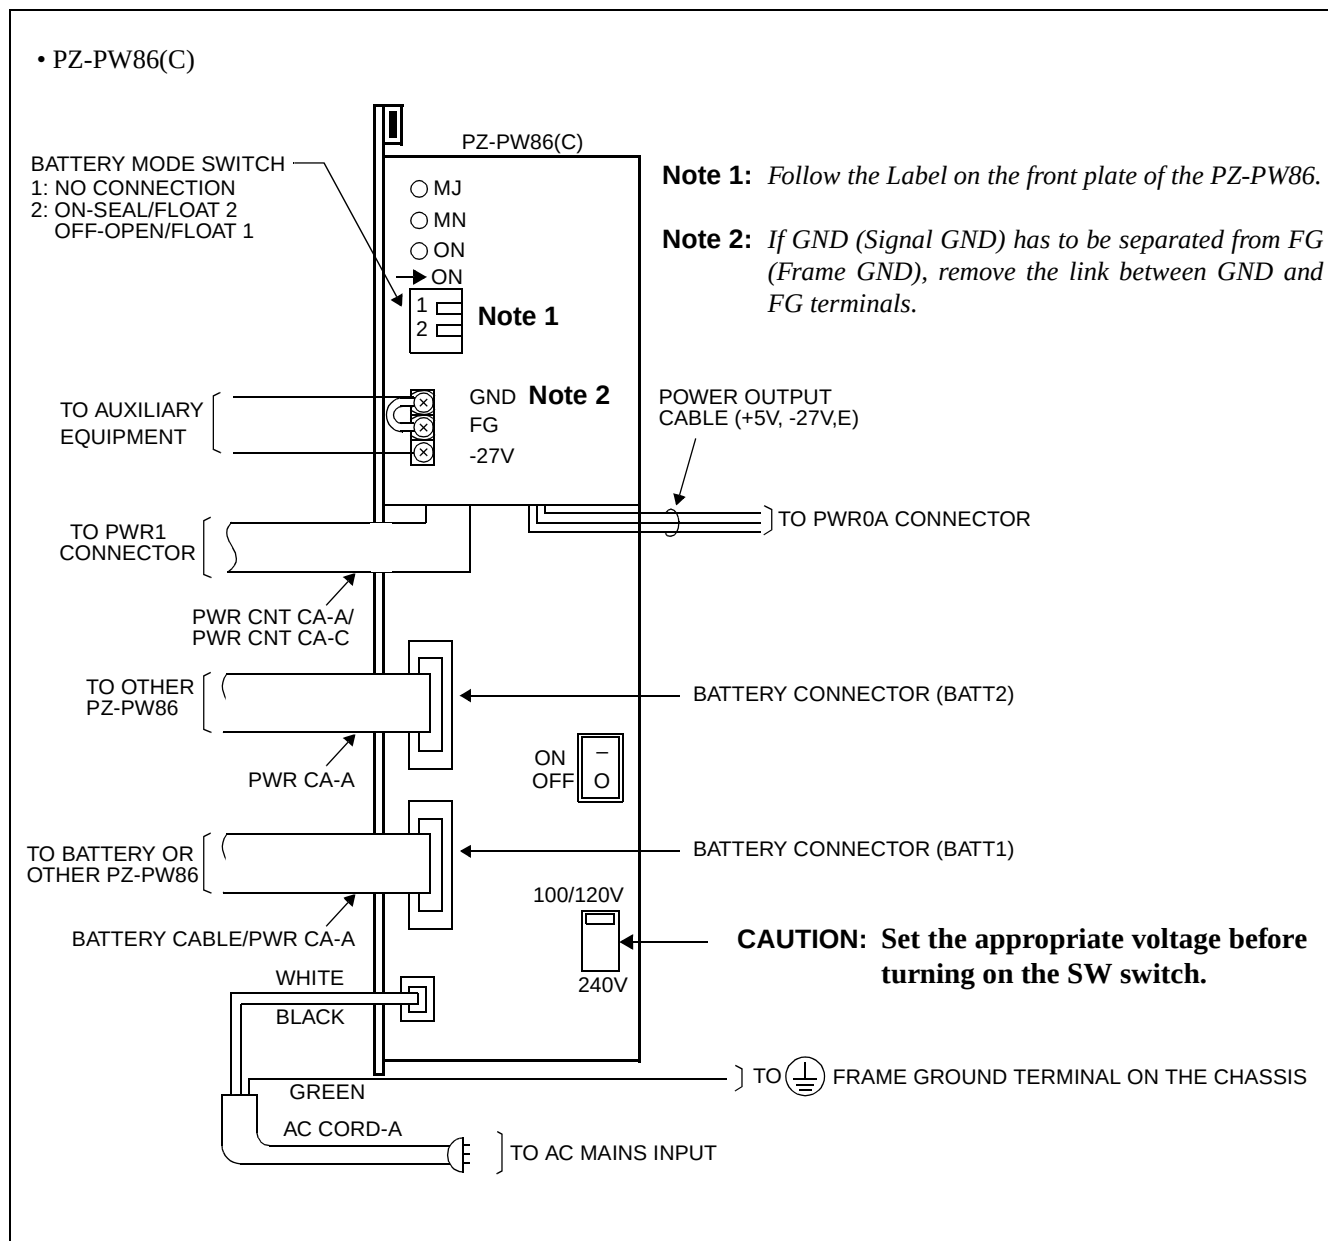


Figure 003-7 Cable Connection on PZ-PW86/PW112

• PZ-PW86(D)

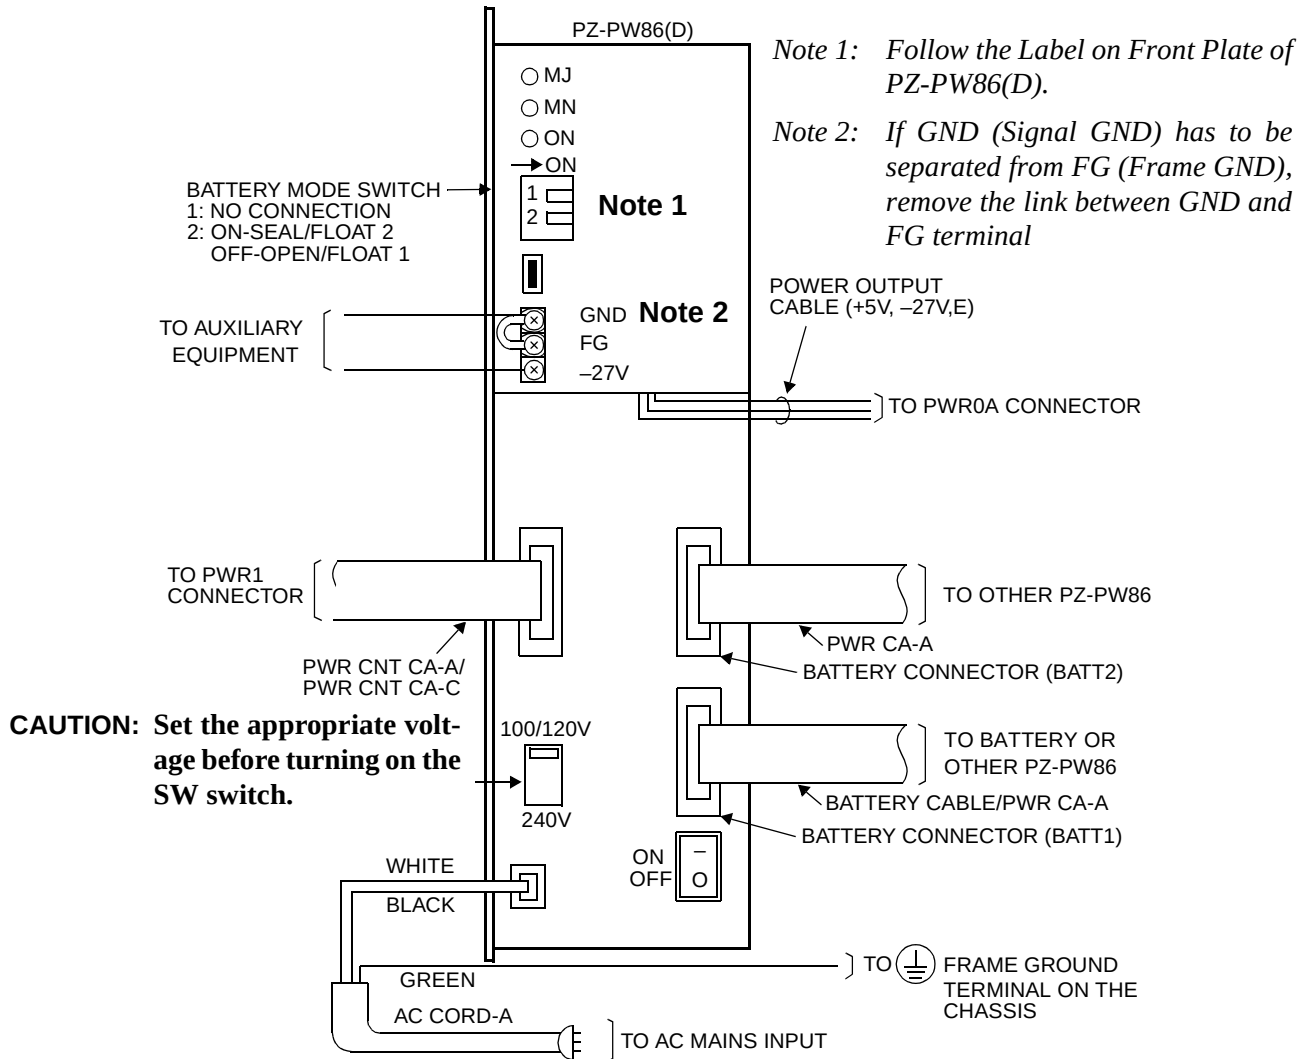


Figure 003-7 Cable Connection on PZ-PW86/PW112 (Continued)

• PZ-PW112

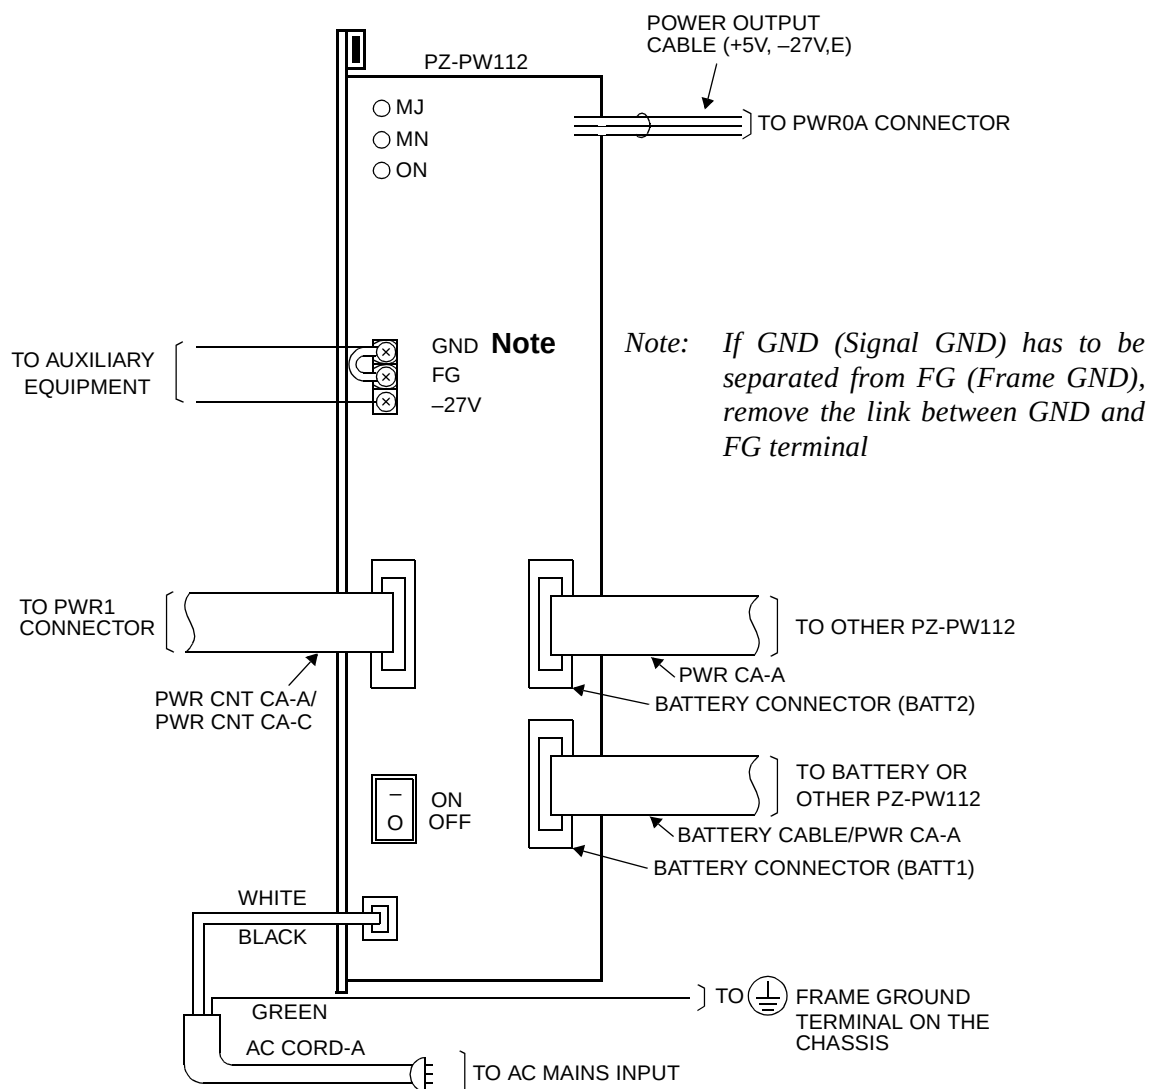


Figure 003-7 Cable Connection on PZ-PW86/PW112 (Continued)

NAP-200-003
Sheet 11/12
Installation of Main Equipment

- (2) When the system is two PIM configuration, unplug the PWR CNT CA-A and connect the PWR CNT CA-C as shown in [Figure 003-8](#).

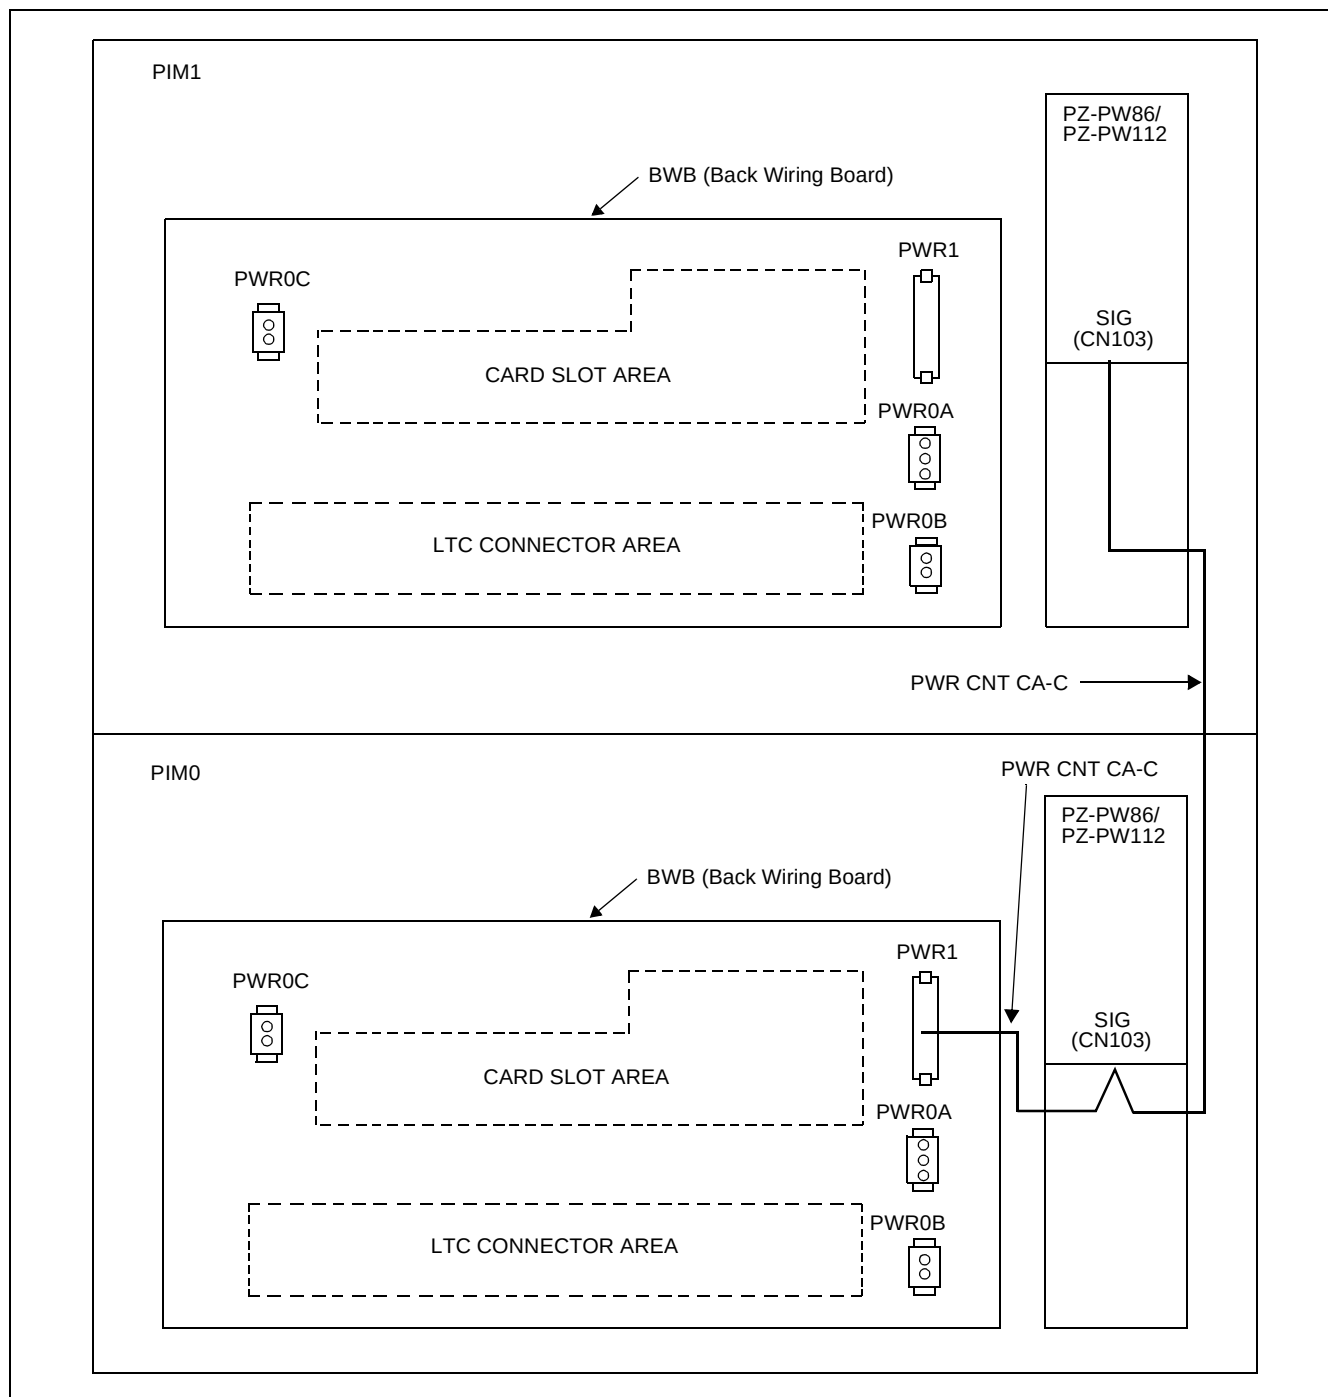


Figure 003-8 PWR CNT CA-C Cable Connection between PIMs

NAP-200-003
Sheet 12/12
Installation of Main Equipment

- (3) Bring the AC CORD-A-U out of the PIM through the cable hole on the bottom of the lower PIM, and plug it into a commercial AC outlet.

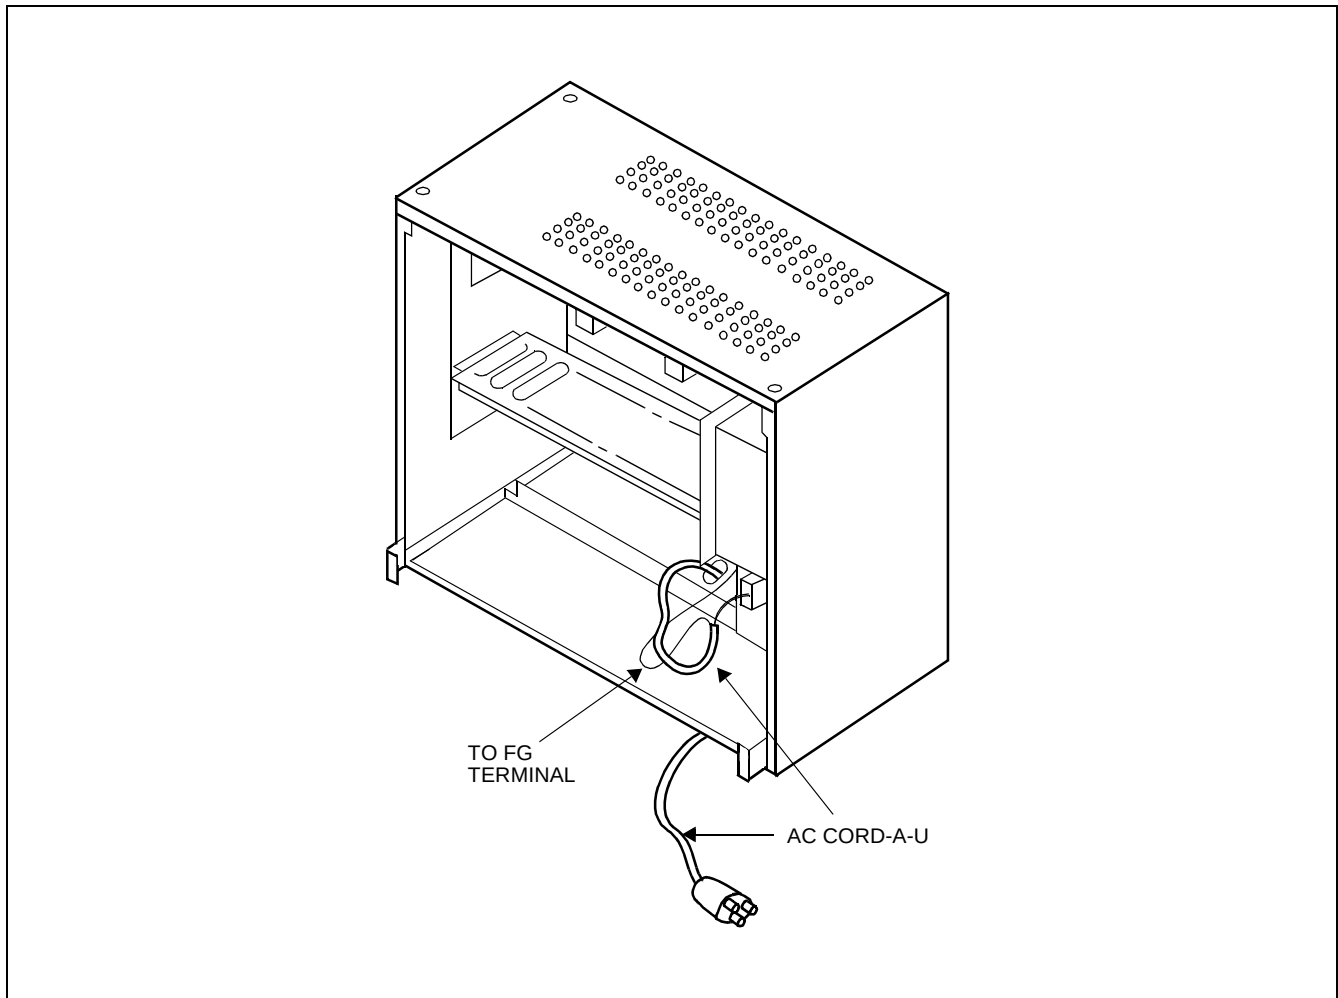


Figure 003-9 AC Power Cable Wiring

NAP-200-004
Sheet 1/2
PWR CA-A and BUS Cable Connection

- (1) When the system is two PIM configuration, connect the PZ-PW86/PZ-PW112 Cards to each other using PWR CA-A cables, as shown in [Figure 004-1](#).

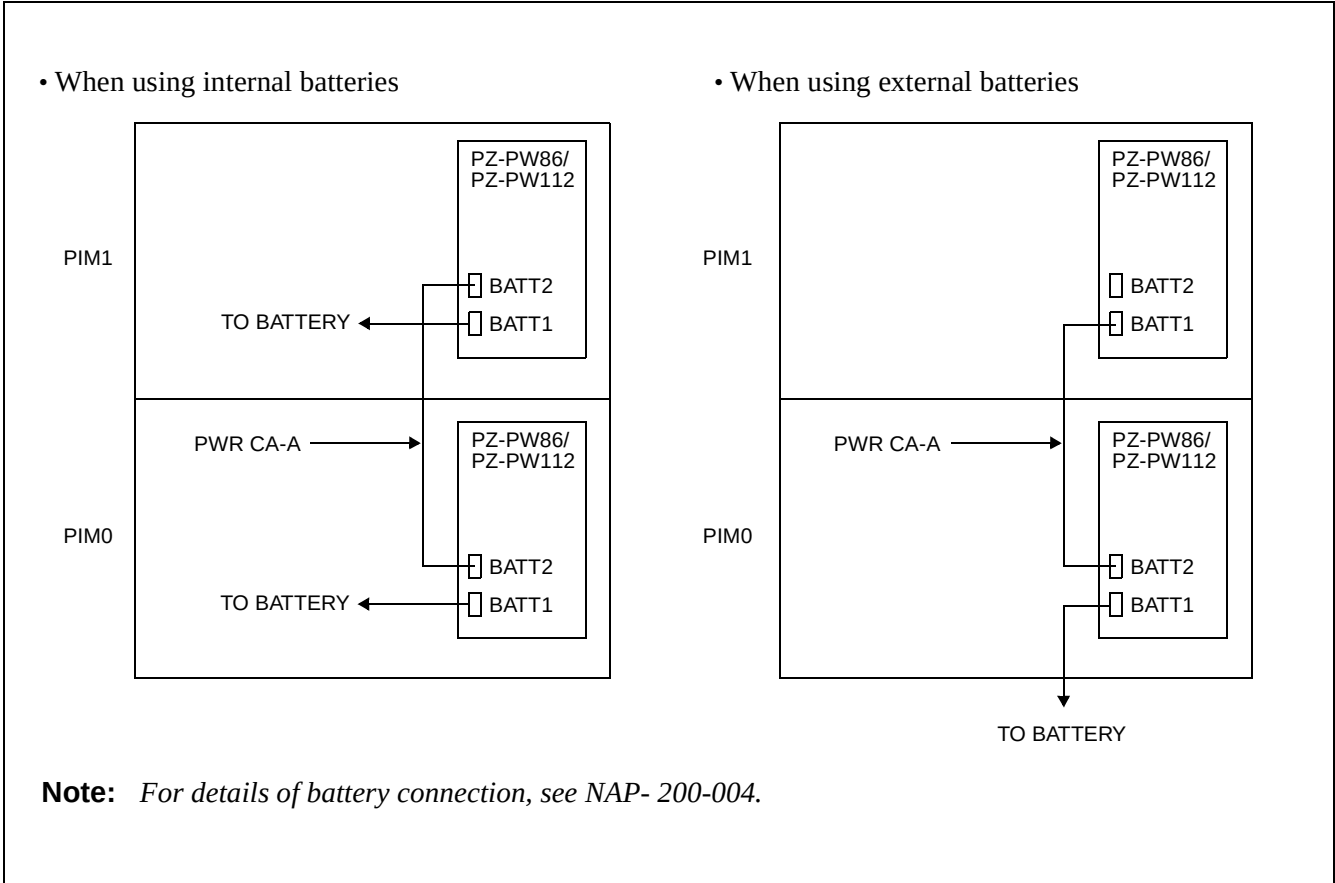


Figure 004-1 Connection of PWR CA-A Cables

NAP-200-004
Sheet 2/2
PWR CA-A and BUS Cable Connection

- (2) Mount the BS00 Card in the BUS slot of PIM0. Also, mount the BS01 Card in the BUS slot of PIM1. When the system is a single PIM configuration, neither PN-BS00 nor PN-BS01 is needed.
- (3) Connect the BUS cards using BUS cable (48-TW-0.7 CONN CA).

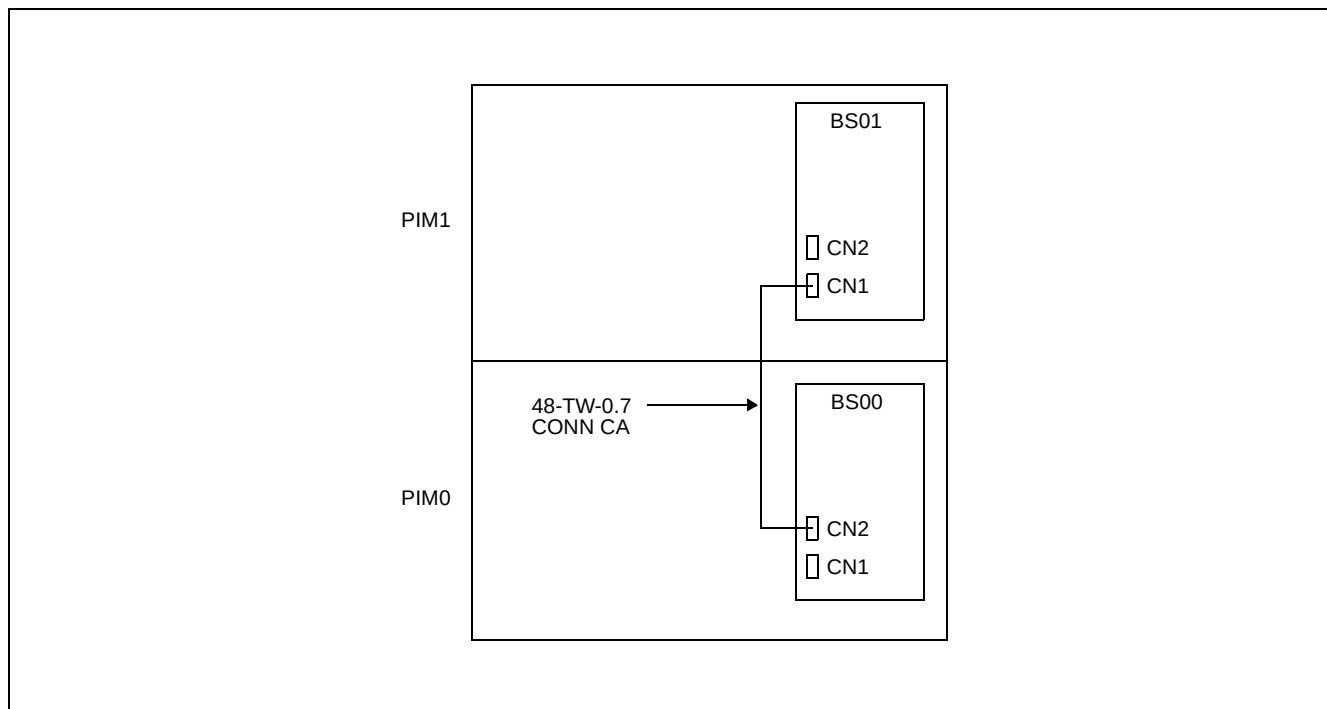


Figure 004-2 Mounting BUS Cards

NAP-200-005
Sheet 1/4
Connection of Battery

1. BATTERY CONNECTION

CAUTION 1: 24V batteries must be used in this system.

CAUTION 2: If battery terminals (+, –) contact with the module under connecting the battery cable to the PZ-PW86/PW112 card, the PZ-PW86/PW112 card or the BWB may be broken. Therefore, the installer must perform work in accordance with the following steps when mounting or removing the batteries.

- When mounting batteries:
 - (1) Connect the battery cable to the batteries.
 - (2) Mount the batteries into the appointed position of the PIM.
 - (3) Connect the battery cable to the PZ-PW86/PW112 card.
- When removing batteries:
 - (1) Disconnect the battery cable from the PZ-PW86/PW112 card.
 - (2) Remove the batteries from the PIM.

Standard Battery

Internal Battery : GS type PX 12026

Optional Battery

External Battery : YUASA type NPH-3.2-12
 MATUSHITA type LCR-12V-3.4NE

These batteries will provide 30 minutes of battery backup. They will not fit within the NEAX1000 PIM.

NAP-200-005
Sheet 3/4
Connection of Battery

1.1 Internal Battery Connection

- (1) Mount the battery unit (24V DC, 2.6 AH) into the PIM (standard with system) as shown in [Figure 005-2](#).

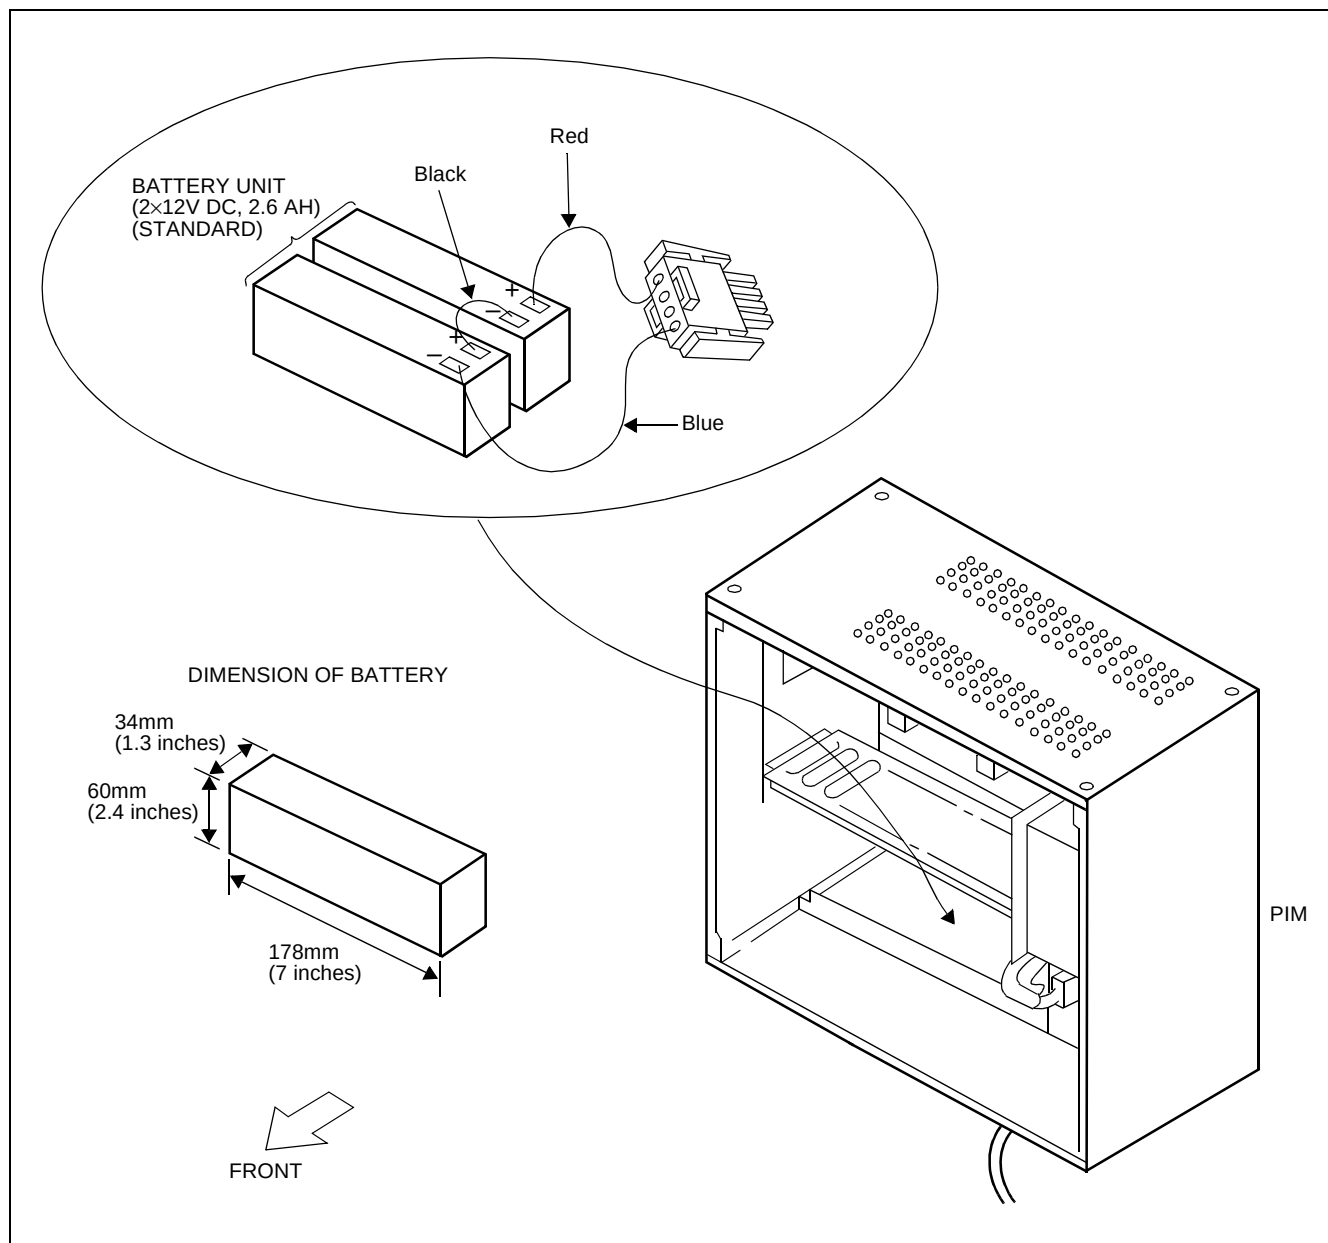


Figure 005-2 Internal Battery Mounting

NAP-200-005
Sheet 4/4
Connection of Battery

- (2) Plug the battery cable connector into the BATT1 connector on the PZ-PW86/PZ-PW112 as shown in [Figure 005-3](#).
- (3) Secure the batteries and battery cable using tie wraps.

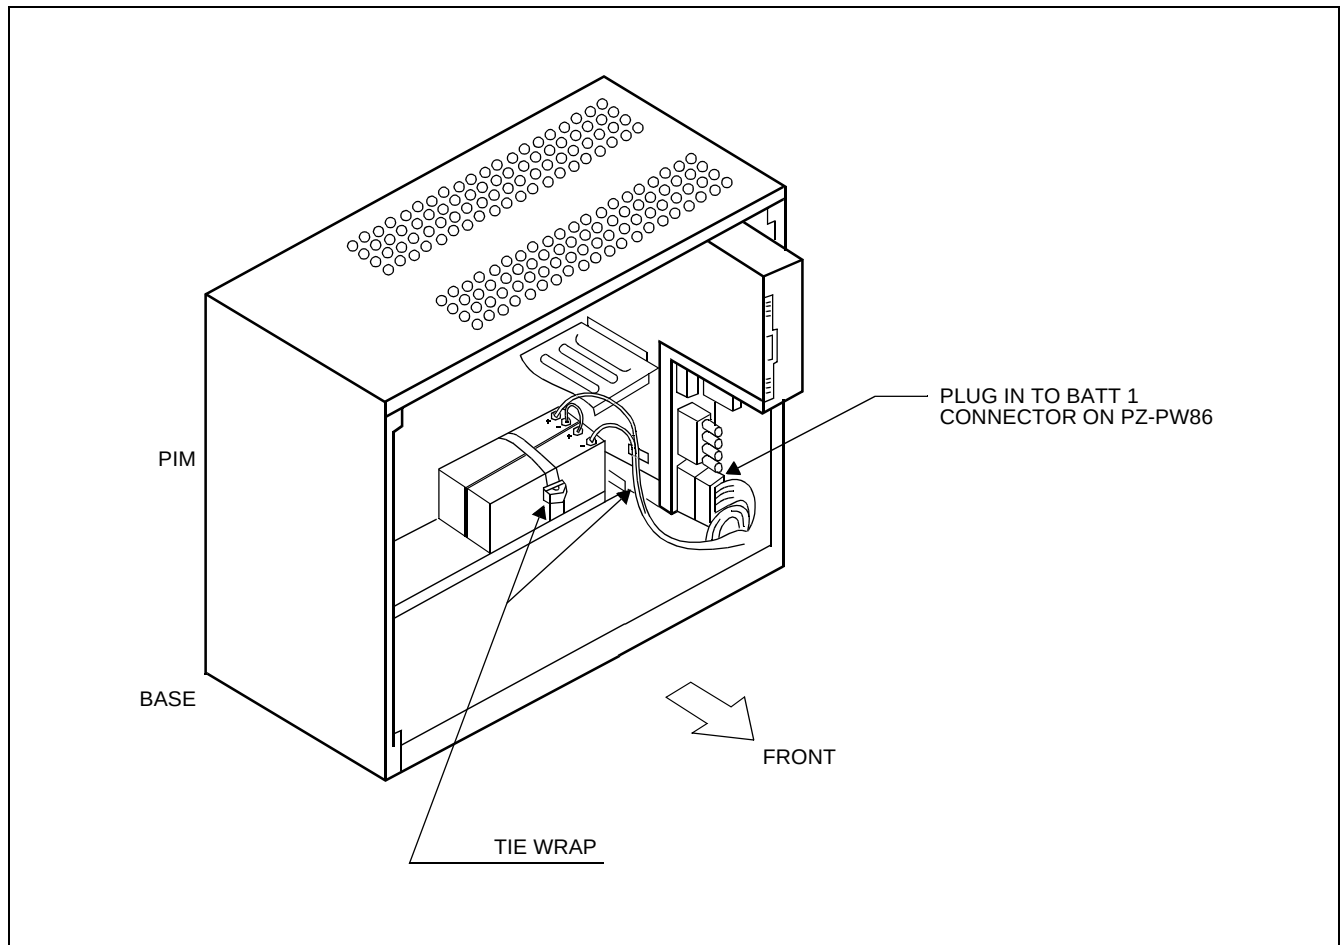


Figure 005-3 Internal Battery Connection

NAP-200-006
Sheet 1/2
Cable Running to MDF

1. MDF CABLE

To facilitate the termination of the 25 pair cables (MDF cables) from the system to the MDF, the length of each cable to be used should be predetermined according to the distance between the MDF and the system. Each cable should be labeled at both ends using a cable number or cable designation as shown in [Figure 006-1](#).

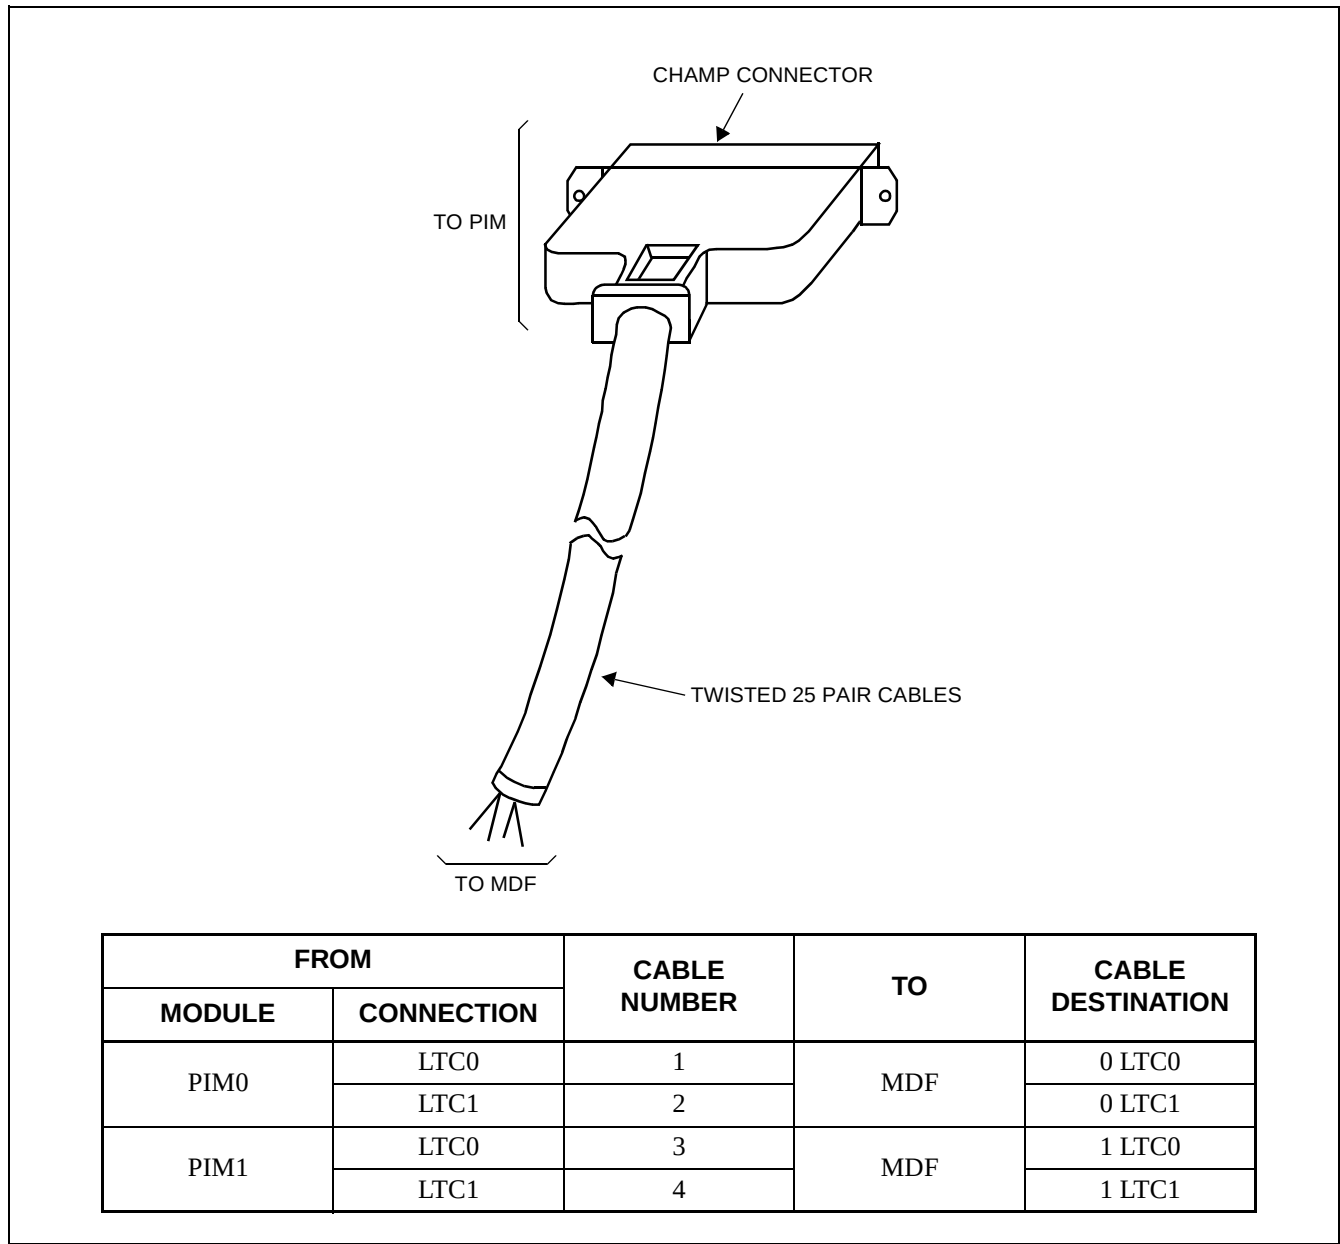


Figure 006-1 MDF Cable

NAP-200-006
Sheet 2/2
Cable Running to MDF

2. CABLE RUNNING TO EXTERNAL MDF

- (1) Bring the MDF cable up to the Main Equipment through the cable hole(s) of the bottom cover.
- (2) Connect the champ connector of each MDF cable to an LTC connector located on a PIM using the screws provided, as shown in [Figure 006-2](#).
- (3) Pare the sheath of each MDF cable and secure the shield to the bottom of the PIM using tie wraps, as shown in [Figure 006-2](#).

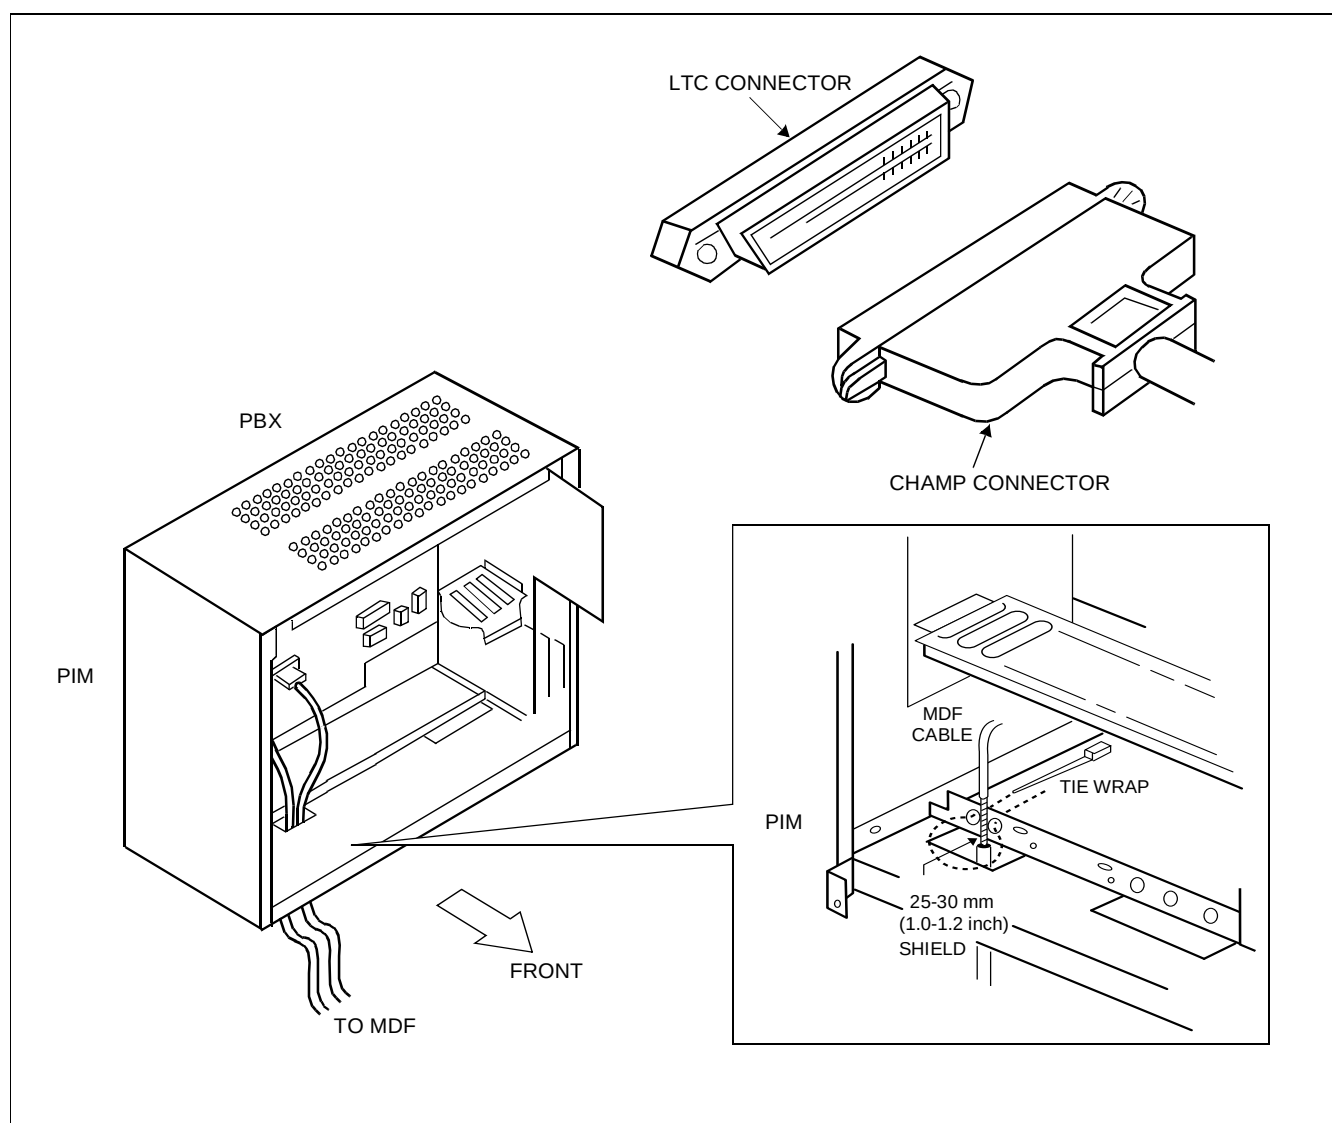


Figure 006-2 Cable Running to External MDF

NAP-200-007
Sheet 1/55
Termination of Cables on MDF

1. CABLE CONNECTION TO MDF

- (1) Connect the cables to the MDF referring to [Figure 007-1](#) and [Table 007-1](#).

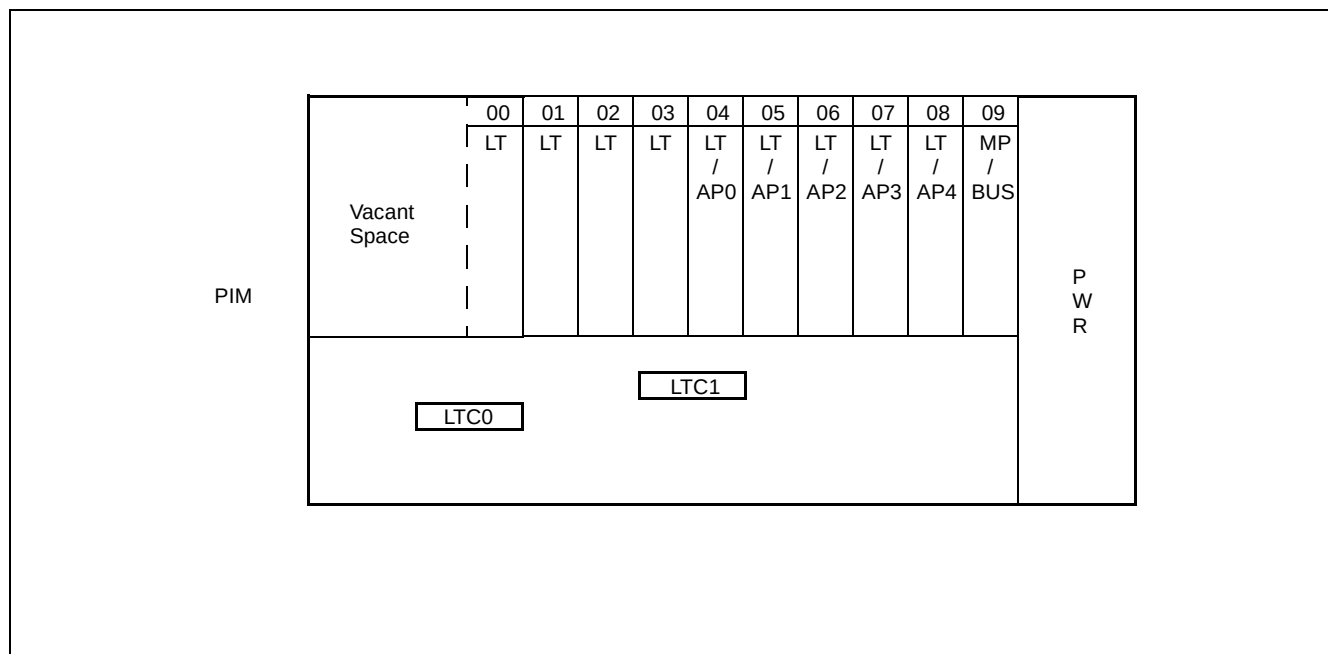


Figure 007-1 Card Slots and LTC Connectors Location

Table 007-1 LTC Connector Accommodation

LTC CONNECTOR	CARD SLOT NUMBER	REMARKS
LTC0	LT01 ~ LT03	
LTC1	LT04/AP0 ~ LT08/AP4	When AD8 is mounted in LT00, pins 25 and 50, bring out leads for AD8 internal modem connection.

NAP-200-007
Sheet 2/55
Termination of Cables on MDF

- (2) [Figure 007-2](#) shows the relationship between each Line Equipment Number (LEN) and each Card Slot Number (LT Number).

Note 1				Note 2		Note 3				
PIM 1	0127	0071	0079	0087	0095		0103		0111	LEN (LINE EQUIPMENT NUMBER)
	0126	0070	0078	0086	0094		0102		0110	
	0125	0069	0077	0085	0093		0101		0109	
	0124	0068	0076	0084	0092		0100		0108	
	0123	0067	0075	0083	0091	0095	0099	0103	0107	
	0122	0066	0074	0082	0090	0094	0098	0102	0106	
	0121	0065	0073	0081	0089	0093	0097	0101	0105	
	0120	0064	0072	0080	0088	0092	0096	0100	0104	
(LT00)	(LT01)	(LT02)	(LT03)	(LT04)	(LT05)	(LT06)	(LT07)	(LT08)	CARD SLOT NUMBER	
PIM 0	0063	0007	0015	0023	0031		0039		0047	LEN (LINE EQUIPMENT NUMBER)
	0062	0006	0014	0022	0030		0038		0046	
	0061	0005	0013	0021	0029		0037		0045	
	0060	0004	0012	0020	0028		0036		0044	
	0059	0003	0011	0019	0027	0031	0035	0039	0043	
	0058	0002	0010	0018	0026	0030	0034	0038	0042	
	0057	0001	0009	0017	0025	0029	0033	0037	0041	
	0056	0000	0008	0016	0024	0028	0032	0036	0040	
(LT00)	(LT01)	(LT02)	(LT03)	(LT04)	(LT05)	(LT06)	(LT07)	(LT08)	CARD SLOT NUMBER	

Note 1

Note 2

Note 3

Note 1: Do not mount line/trunk circuit card with cabling in this slot; this slot has no connection to the MDF via the backplane (LTC cables).

Note 2: When an 8-port line/trunk card, which requires cabling to MDF, is mounted in Slot 04, Slot 05 must be left vacant or mounted with circuit cards¹ that do not interfere with the 8-port card mounted in LT04.

Note 3: When an 8-port line/trunk card, which requires cabling to MDF is mounted in SSlot 06, Slot 07 must be left vacant or mounted with circuit cards¹ that do not interfere with the 8-port card mounted in LT06.

Note 4: When using internal DTMF Receiver (4RST) on MP card, assign Card No. E200 to LEN No. 0124.

Note 5: If single-line cards are mounted in LT or LT/AP slots, an external ring generator must be connected to PWR0B. The system power supply does not provide these voltages. It is recommended that the APR adapter be used in dual-port mode to provide for single-line devices.

¹ When an 8-port card is mounted in Slot 04/06, Slot 05/07 can only be mounted with the following cards:

SPN-AP00	SPN-AP01	SPN-ME00	SPN-SC01
SPN-SC02	SPN-4RSTB	SPN-4RSTB-911	SPN-4RSTC
SPN-CK00	SPN-CC00	PN-M03	SPN-SC03 (CSH)/(ICH)

Figure 007-2 Location of Each LEN

(3) [Figure 007-3](#) shows the LTC connector pin arrangement.

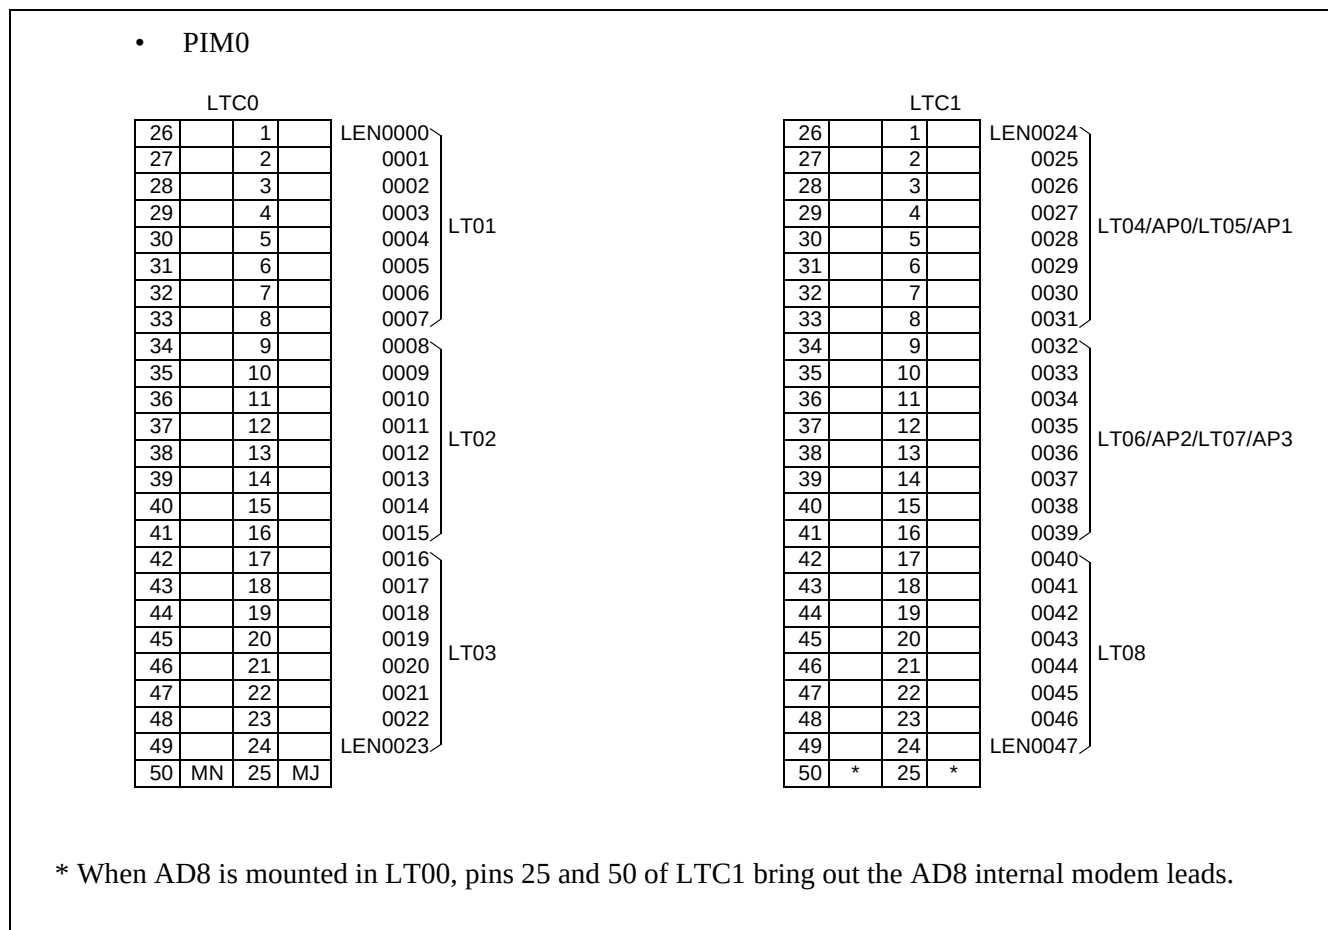


Figure 007-3 LTC Connector Pin Arrangement

- PIM1

LTC0				LTC1			
26		1		26		1	
27		2		27		2	
28		3		28		3	
29		4		29		4	
30		5		30		5	
31		6		31		6	
32		7		32		7	
33		8		33		8	
34		9		34		9	
35		10		35		10	
36		11		36		11	
37		12		37		12	
38		13		38		13	
39		14		39		14	
40		15		40		15	
41		16		41		16	
42		17		42		17	
43		18		43		18	
44		19		44		19	
45		20		45		20	
46		21		46		21	
47		22		47		22	
48		23		48		23	
49		24		49		24	
50		25		50	*	25	*

LEN0064				LEN0088			
0065				0089			
0066				0090			
0067				0091			
0068				0092			
0069				0093			
0070				0094			
0071				0095			
0072				0096			
0073				0097			
0074				0098			
0075				0099			
0076				0100			
0077				0101			
0078				0102			
0079				0103			
0080				0104			
0081				0105			
0082				0106			
0083				0107			
0084				0108			
0085				0109			
0086				0110			
LEN0087				LEN0111			

LT01				LT04/AP0/LT05/AP1			
LT02				LT06/AP2/LT07/AP3			
LT03				LT08/AP4			

* When AD8 is mounted in LT00, pins 25 and 50 of LTC1 bring out the AD8 internal modem leads.

Figure 007-3 LTC Connector Pin Arrangement (Continued)

NAP-200-007
Sheet 5/55
Termination of Cables on MDF

2. MDF CROSS CONNECTIONS

Table 007-2 shows the cross connections on the MDF for LTC0 and LTC1.

Table 007-2 LTC0 and LTC1 MDF Cross Connection Information

PIN	RUNNING CABLE	STATION CABLE	SLOTS	TYPE OF INTERFACE								
				CO (4COT)	CO (8COT)	2-WIRE E&M TIE LINE (2ODT)	4-WIRE E&M TIE LINE (2ODT)	DID (AUC)	DID (4DIT)	SLT (8LC)	SLT (4LC)	SLT (AUC)
26	WH-BL	GN	1	T0	T0	T0	TxT0	T0	T0	T0	T0	T0
1	BL-WH	RD		R0	R0	R0	TxR0	R0	R0	R0	R0	R0
27	WH-OR	BK		T1	T1		RcvT0	T1	T1	T1	T1	T1
2	OR-WH	YL		R1	R1		RcvR0	R1	R1	R1	R1	R1
28	WH-GN	GN		T2	T2	T1	TxT1		T2	T2	T2	
3	GN-WH	RD		R2	R2	R1	TxR1		R2	R2	R2	
29	WH-BR	BK		T3	T3		RcvT1		T3	T3	T3	
4	BR-WH	YL		R3	R3		RcvR1		R3	R3	R3	
30	WH-SL	GN	Note 1		T4					T4		
5	SL-WH	RD			R4					R4		
31	RD-BL	BK			T5					T5		
6	BL-RD	YL			R5					R5		
32	RD-OR	GN			T6					T6		
7	OR-RD	RD			R6					R6		
33	RD-GN	BK			T7					T7		
8	GN-RD	YL			R7					R7		
34	RD-BR	GN	2	T0	T0	T0	TxT0	T0	T0	T0	T0	T0
9	BR-RD	RD		R0	R0	R0	TxR0	R0	R0	R0	R0	R0
35	RD-SL	BK		T1	T1	T1	RcvT0	T1	T1	T1	T1	T1
10	SL-RD	YL		R1	R1	R1	RcvR0	R1	R1	R1	R1	R1
36	BK-BL	GN		T2	T2		TxT1		T2	T2	T2	
11	BL-BK	RD		R2	R2		TxR1		R2	R2	R2	
37	BK-OR	BK		T3	T3		RcvT1		T3	T3	T3	
12	OR-BK	YL		R3	R3		RcvR1		R3	R3	R3	
38	BK-GN	GN	Note 1		T4					T4		
13	GN-BK	RD			R4					R4		
39	BK-BR	BK			T5					T5		
14	BR-BK	YL			R5					R5		
40	BK-SL	GN			T6					T6		
15	SL-BK	RD			R6					R6		
41	YL-BL	BK			T7					T7		
16	BL-YL	YL			R7					R7		

NAP-200-007
Sheet 6/55
Termination of Cables on MDF

Table 007-2 LTC0 and LTC1 MDF Cross Connection Information (Continued)

PIN	RUNNING CABLE	STATION CABLE	SLOTS	TYPE OF INTERFACE								
				CO (4COT)	CO (8COT)	2-WIRE E&M TIE LINE (2ODT)	4-WIRE E&M TIE LINE (2ODT)	DID (AUC)	DID (4DIT)	SLT (8LC)	SLT (4LC)	SLT (AUC)
42	YL-OR	GN	3	T0	T0	T0	TxT0	T0	T0	T0	T0	T0
17	OR-YL	RD		R0	R0	R0	TxR0	R0	R0	R0	R0	R0
43	YL-GN	BK		T1	T1		RcvT0	T1	T1	T1	T1	T1
18	GN-YL	YL		R1	R1		RcvR0	R1	R1	R1	R1	R1
44	YL-BR	GN		T2	T2	T1	TxT1		T2	T2	T2	
19	BR-YL	RD		R2	R2	R1	TxR1		R2	R2	R2	
45	YL-SL	BK		T3	T3		RcvT1		T3	T3	T3	
20	SL-YL	YL		R3	R3		RcvR1		R3	R3	R3	
46	VI-BL	GN		T0	T4	T0	TxT0	T0	T0	T4	T0	T0
21	BL-VI	RD		R0	R4	R0	TxR0	R0	R0	R4	R0	R0
47	VI-OR	BK	Note 2	T1	T5		RcvT0	T1	T1	T5	T1	T1
22	OR-VI	YL		R1	R5		RcvR0	R1	R1	R5	R1	R1
48	VI-GN	GN		T2	T6	T1	TxT1		T2	T6	T2	
23	GN-VI	RD		R2	R6	R1	TxR1		R2	R6	R2	
49	VI-BR	BK		T3	T7		RcvT1		T3	T7	T3	
24	BR-VI	YL		R3	R7		RcvR1		R3	R7	R3	
50	VI-SL	MN*										
25	SL-VI	MJ*										

* Major and minor alarm connections are used for external indications.

Note 1: When an 8-port card is mounted in LT04 or LT06, LT05 or LT07 must be left vacant or mounted with circuit card, which do not interfere with the 8-port cards.

Note 2: When NEAXmail AD8 is mounted in LT00, the pins on LTC1 are used for NEAXmail AD8 internal modem connection.

NAP-200-007
Sheet 7/55
Termination of Cables on MDF

Table 007-2 LTC0 and LTC1 MDF Cross Connection Information (Continued)

PIN	RUNNING CABLE	STATION CABLE	SLOTS	TYPE OF INTERFACE						
				Multiline Terminal (8DLC) Note 2	Multiline Terminal (4DLC) Note 2	Multiline Terminal (2DLCB) Note 2	SN610 ATTCON (2DLCC) Note 3	EXT. KEY (DK00)	EXT. RELAY (DK00)	EXT. PAGE/ MOH/ BGM (4COT)
26 1	WH-BL BL-WH	GN RD	1 Note 1	T0 R0	T0 R0	T0 R0	RA0 TA0	K1 K0	K1 K0	T R
27 2	WH-OR OR-WH	BK YL		T1 R1	T1 R1	T1 R1	RB0 TB0	K3 K2	K3 K2	T R
28 3	WH-GN GN-WH	GN RD		T2 R2	T2 R2		RA1 TA1	K5 K4	K5 K4	T R
29 4	WH-BR BR-WH	BK YL		T3 R3	T3 R3		RB1 TB1	K7 K6	K7 K6	T R
30 5	WH-SL SL-WH	GN RD		T4 R4						
31 6	RD-BL BL-RD	BK YL		T5 R5						
32 7	RD-OR OR-RD	GN RD		T6 R6						
33 8	RD-GN GN-RD	BK YL		T7 R7						
34 9	RD-BR BR-RD	GN RD	2 Note 1	T0 R0	T0 R0	T0 R0	RA0 TA0	K1 K0	K1 K0	T R
35 10	RD-SL SL-RD	BK YL		T1 R1	T1 R1	T1 R1	RB0 TB0	K3 K2	K3 K2	T R
36 11	BK-BL BL-BK	GN RD		T2 R2	T2 R2		RA1 TA1	K5 K4	K5 K4	T R
37 12	BK-OR OR-BK	BK YL		T3 R3	T3 R3		RB1 TB1	K7 K6	K7 K6	T R
38 13	BK-GN GN-BK	GN RD		T4 R4						
39 14	BK-BR BR-BK	BK YL		T5 R5						
40 15	BK-SL SL-BK	GN RD		T6 R6						
41 16	YL-BL BL-YL	BK YL		T7 R7						

Note 1: When LT04 or LT06 is mounted with an 8-port card, LT05 and/or LT07 must be vacant or mounted with a noninterfacing card.

Note 2: 2 wire type for Multiline Terminal/DSS Console/DESKCON.

Note 3: 4 wire type for Multiline Terminal/SN610 ATTCON.

NAP-200-007
Sheet 8/55
Termination of Cables on MDF

Table 007-2 LTC0 and LTC1 MDF Cross Connection Information (Continued)

PIN	RUNNING CABLE	STATION CABLE	SLOTS	TYPE OF INTERFACE						
				Multiline Terminal (8DLC) Note 2	Multiline Terminal (4DLC) Note 2	Multiline Terminal (2DLCB) Note 2	SN610 ATTCON (2DLCC) Note 3	EXT. KEY (DK00)	EXT. RELAY (DK00)	EXT. PAGE/ MOH/ BGM (4COT)
42	YL-OR	GN	3	T0	T0	T0	RA0	K1	K1	T
17	OR-YL	RD		R0	R0	R0	TA0	K0	K0	R
43	YL-GN	BK		T1	T1	T1	RB0	K3	K3	T
18	GN-YL	YL		R1	R1	R1	TB0	K2	K2	R
44	YL-BR	GN		T2	T2		RA1	K5	K5	T
19	BR-YL	RD		R2	R2		TA1	K4	K4	R
45	YL-SL	BK		T3	T3		RB1	K7	K7	T
20	SL-YL	YL		R3	R3		TB1	K6	K6	R
46	VI-BL	GN		T4	T0	T0	RA0	K1	K1	T
21	BL-VI	RD		R4	R0	R0	TA0	K0	K0	R
47	VI-OR	BK		T5	T1	T1	RB0	K3	K3	T
22	OR-VI	YL		R5	R1	R1	TB0	K2	K2	R
48	VI-GN	GN	Note 4	T6	T2		RA1	K5	K5	T
23	GN-VI	RD		R6	R2		TA1	K4	K4	R
49	VI-BR	BK		T7	T3		RB1	K7	K7	T
24	BR-VI	YL		R7	R3		TB1	K6	K6	R
50	VI-SL	MN*								
25	SL-VI	MJ*								

** Major and minor alarm connections are used for external indications.*

Note 1: When LT04 or LT06 is mounted with an 8-port card, LT05 and/or LT07 must be vacant or mounted with a noninterfacing card.

Note 2: 2 wire type for Multiline Terminal/DSS Console/DESKCON.

Note 3: 4 wire type for Multiline Terminal/SN610 ATTCON.

Note 4: When NEAXmail AD8 is mounted in LT00, the pins on LTC1 are used for NEAXmail AD8 internal modem connection.

- (1) C.O. Trunk
 - (a) 4 Line C.O. Trunk (PN-4COT) (see [Figure 007-4](#))

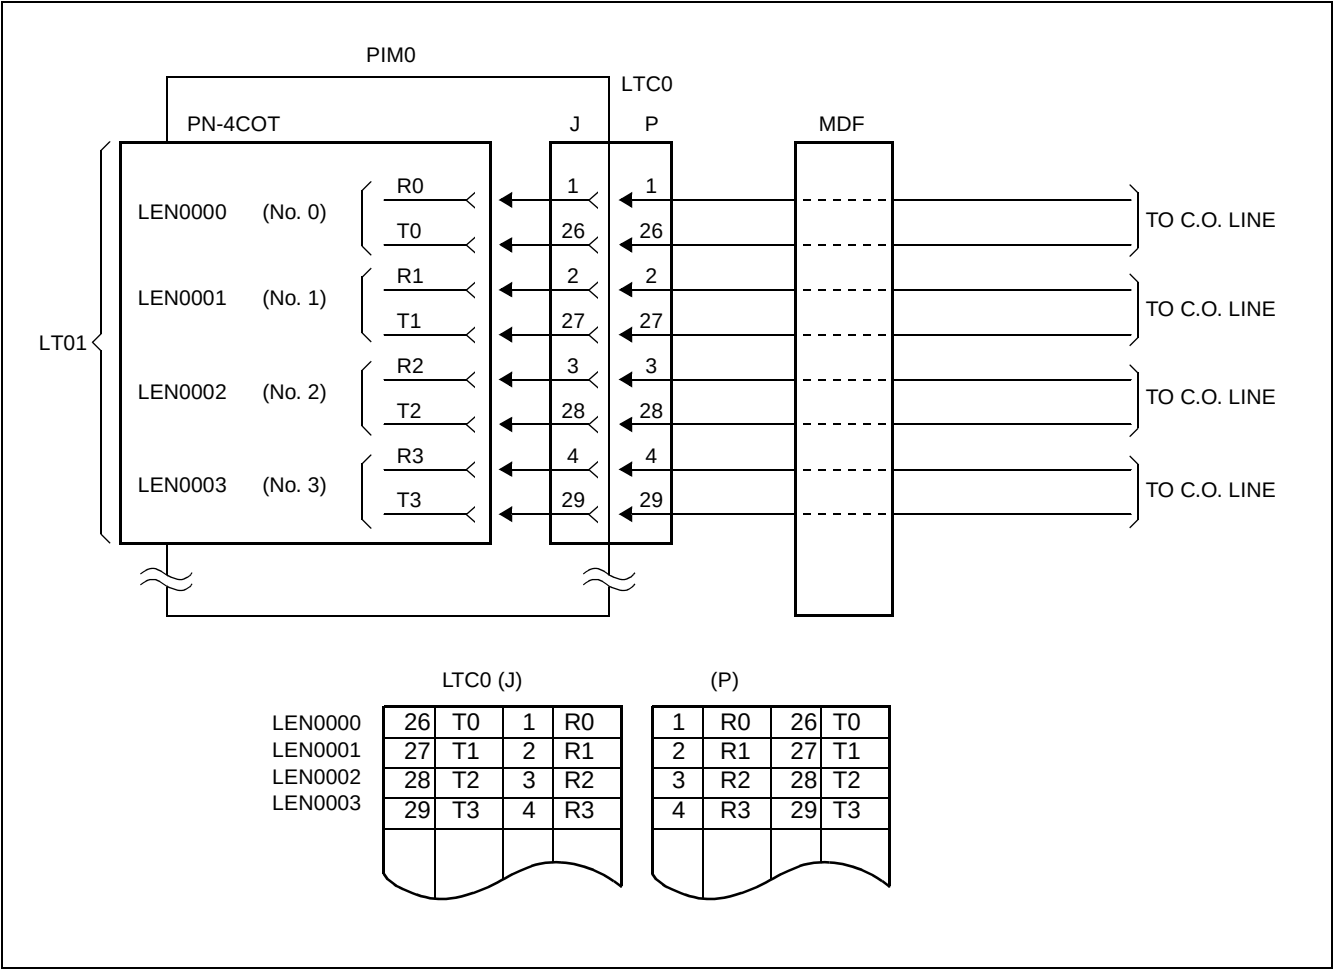


Figure 007-4 MDF Cross Connection for 4 Line C.O. Trunk Card (PN-4COT)

(b) 8 Line C.O. Trunk (PN-8COT) (see [Figure 007-5](#))

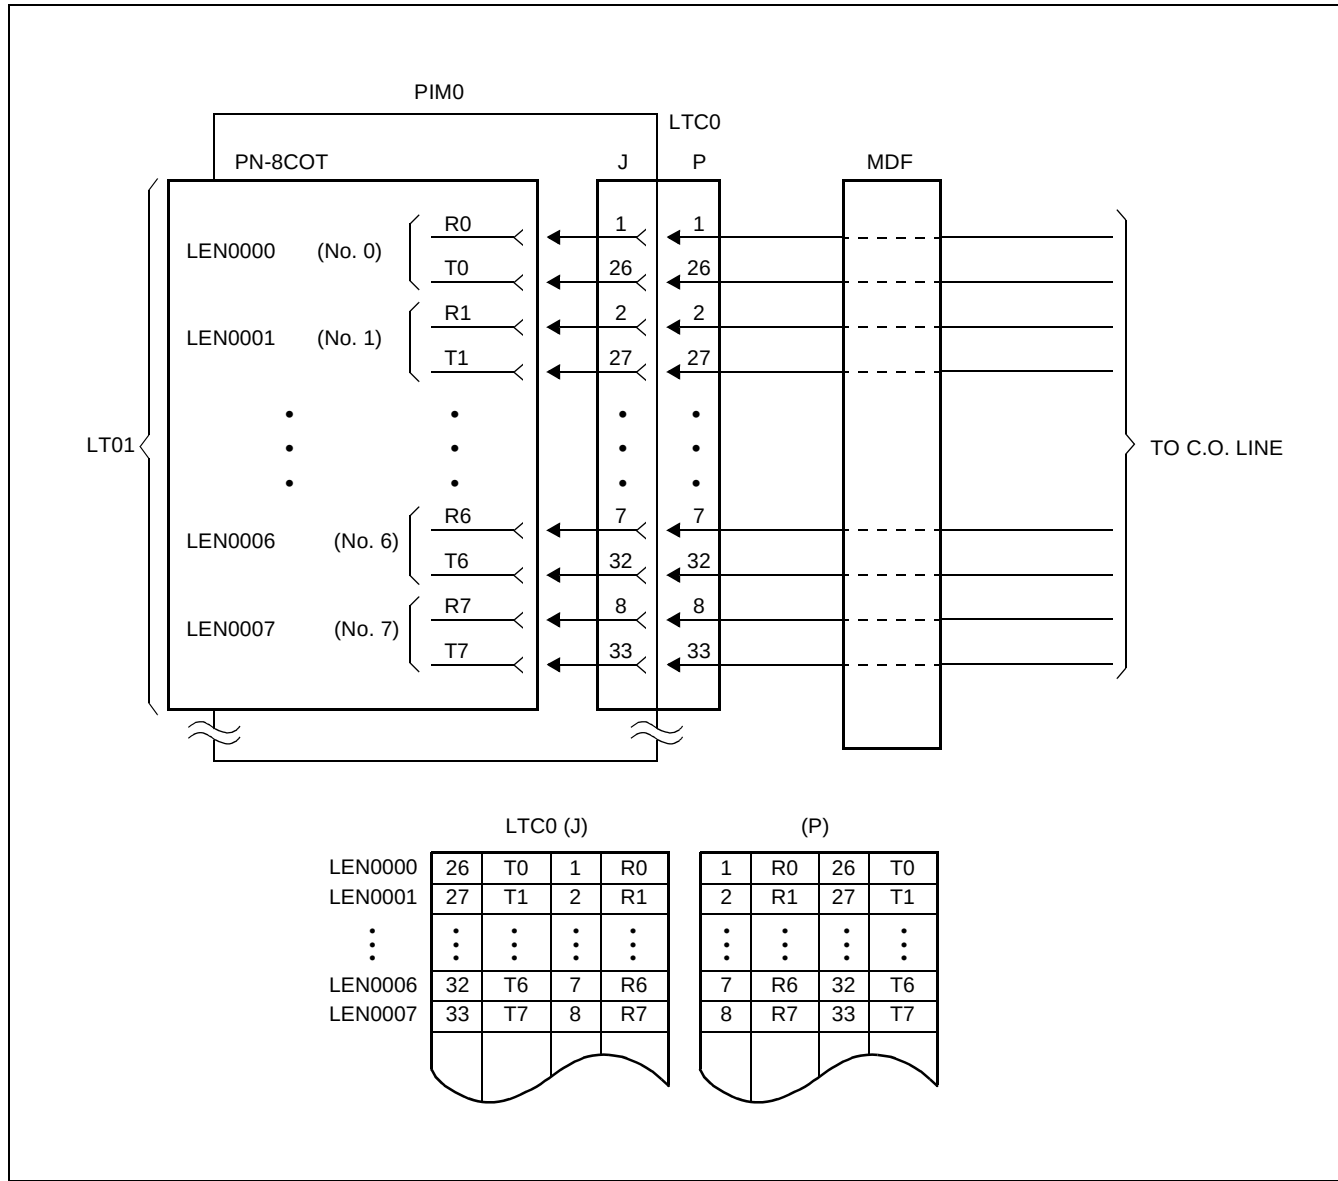


Figure 007-5 MDF Cross Connection for 8 Line C.O. Trunk Card (PN-8COT)

(2) Tie Line Trunk

(a) 4W E&M Trunk (PN-2ODT) (see [Figure 007-6](#))

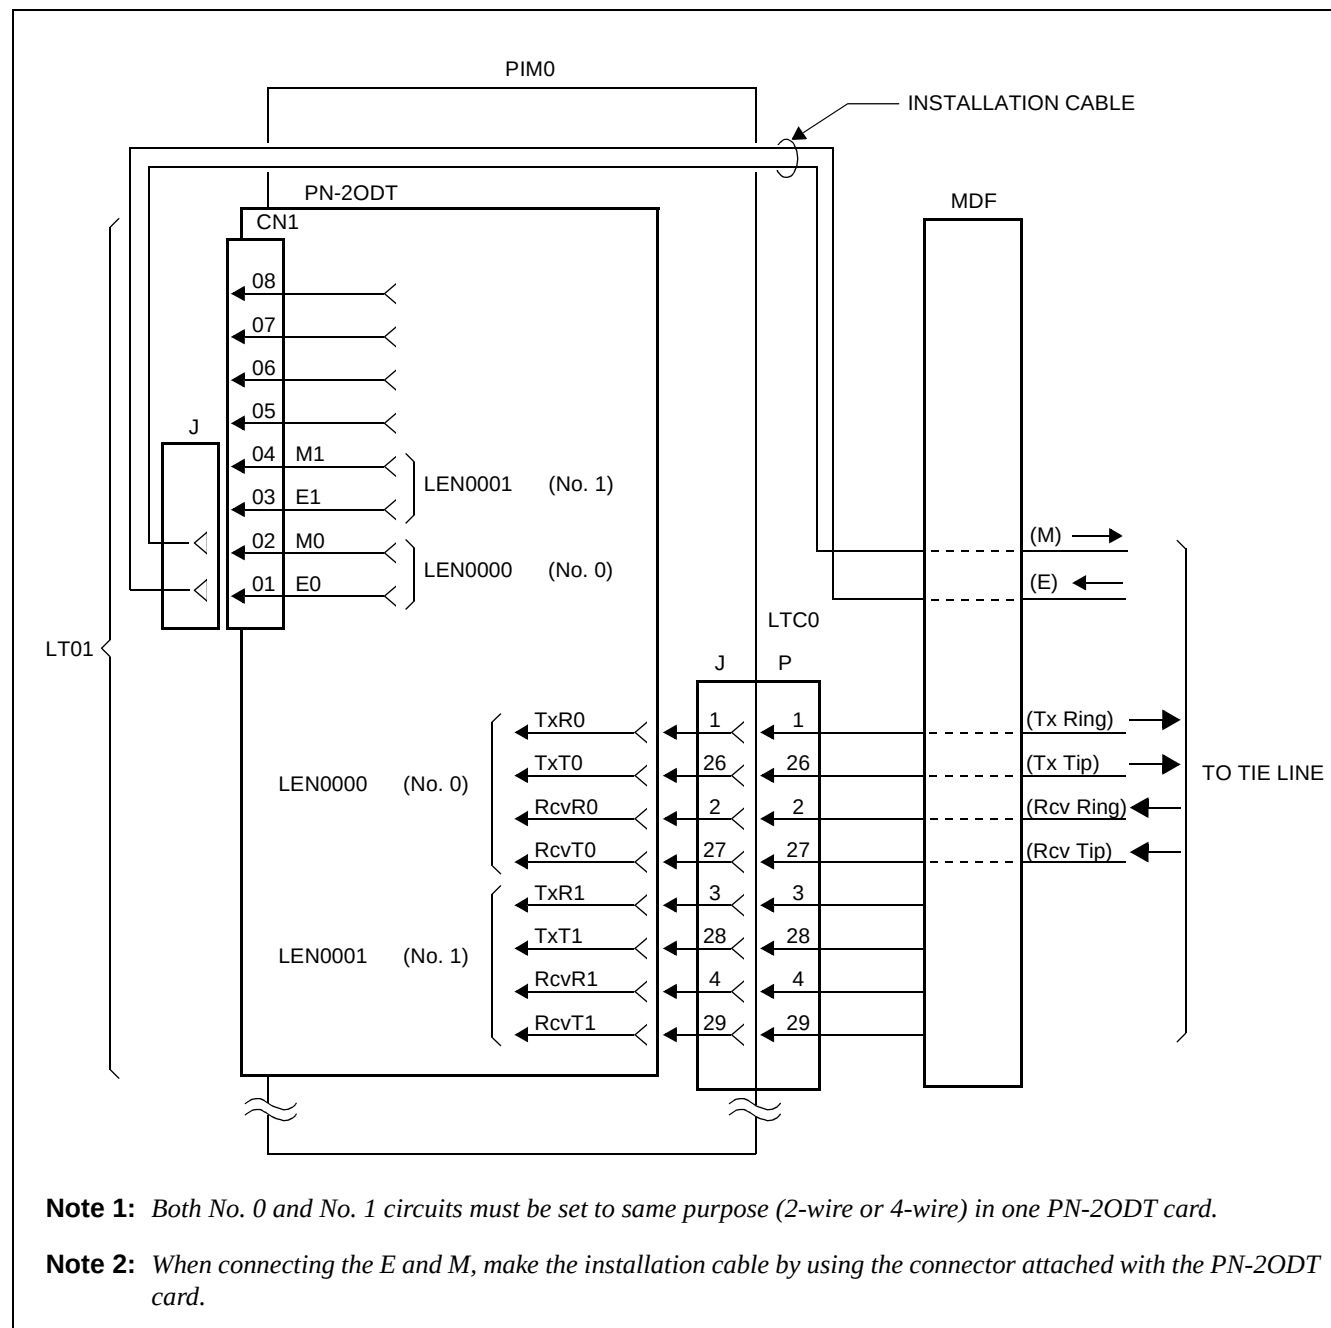


Figure 007-6 MDF Cross Connection for 4W E&M Trunk Card (PN-2ODT)

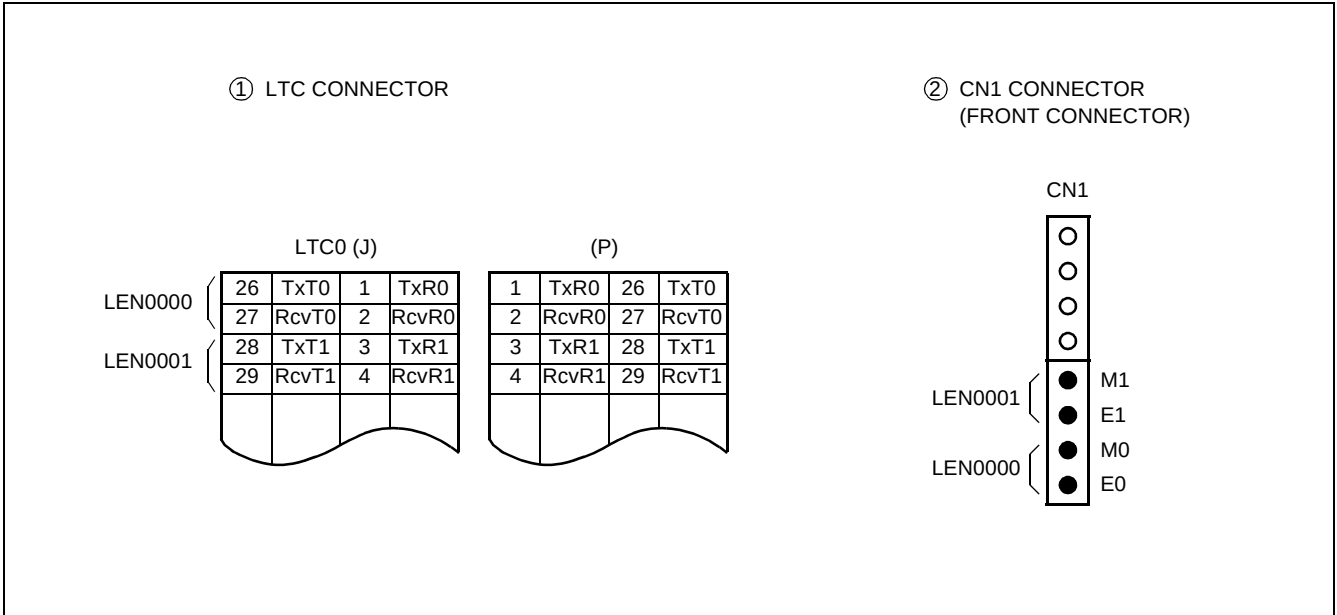


Figure 007-6 MDF Cross Connection for 4W E&M Trunk Card (PN-2ODT) (Continued)

(b) 2W E&M (PN-2ODT) (see [Figure 007-7](#))

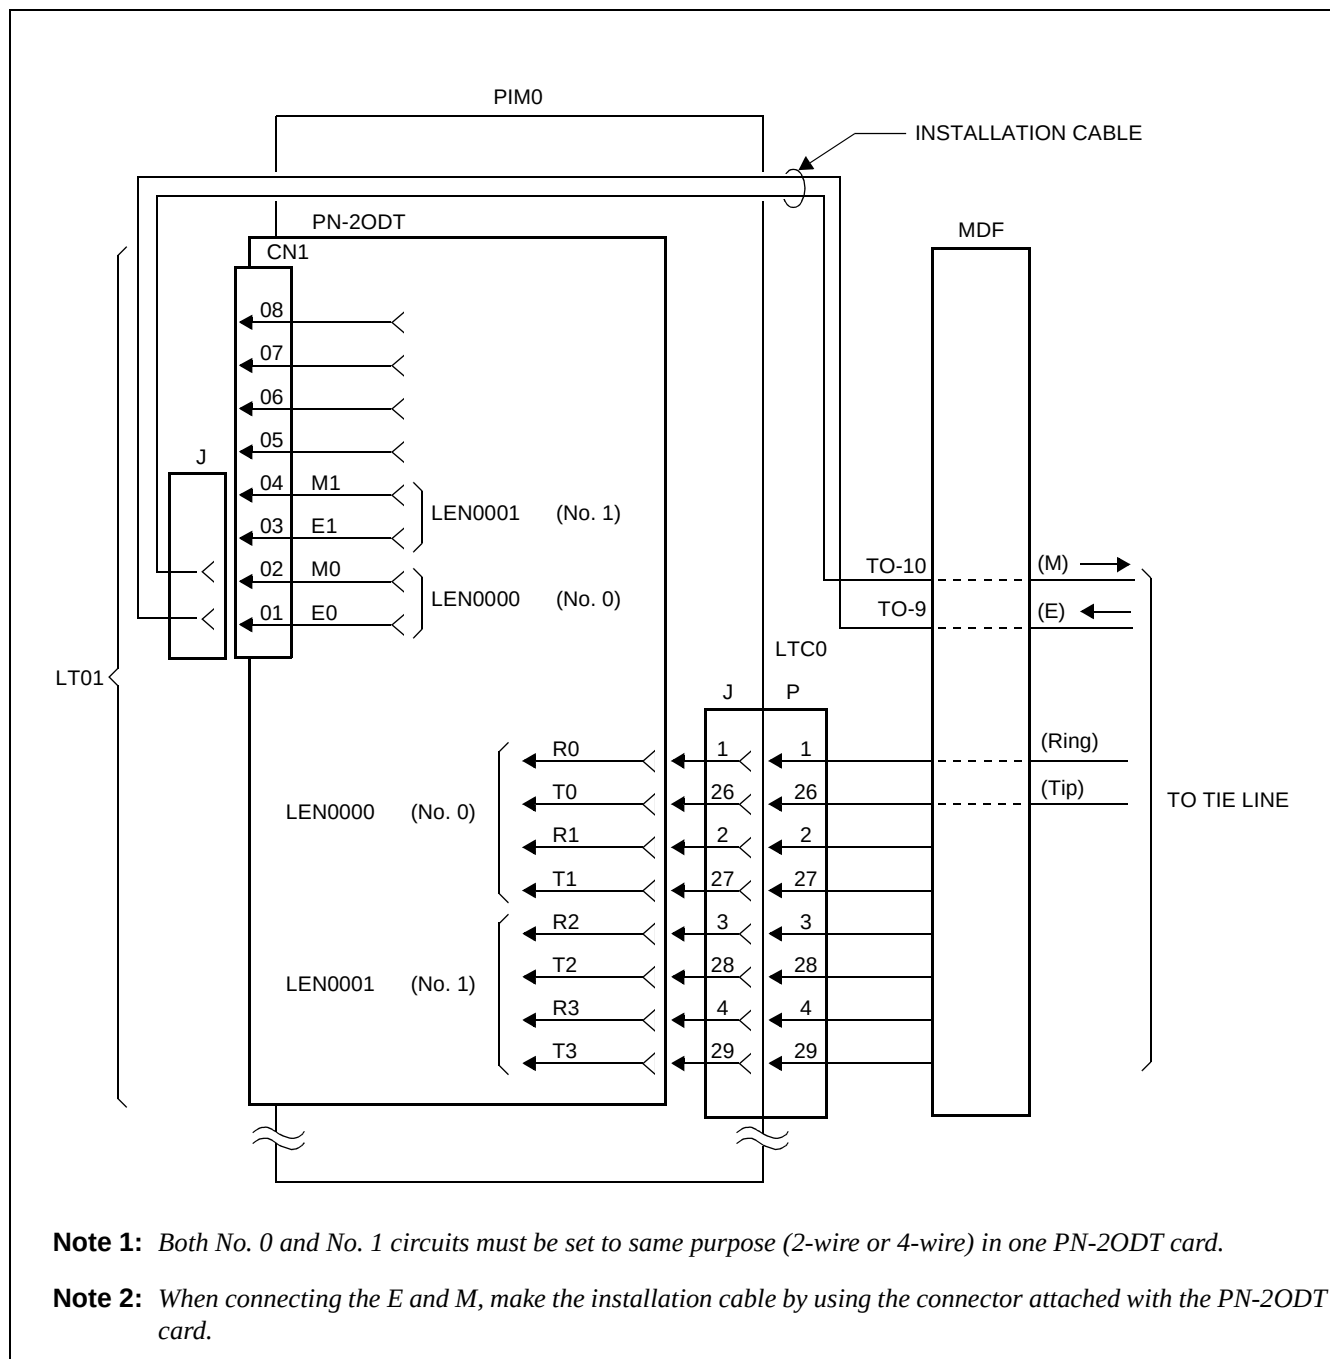


Figure 007-7 MDF Cross Connection for 2W E&M Trunk Card (PN-2ODT)

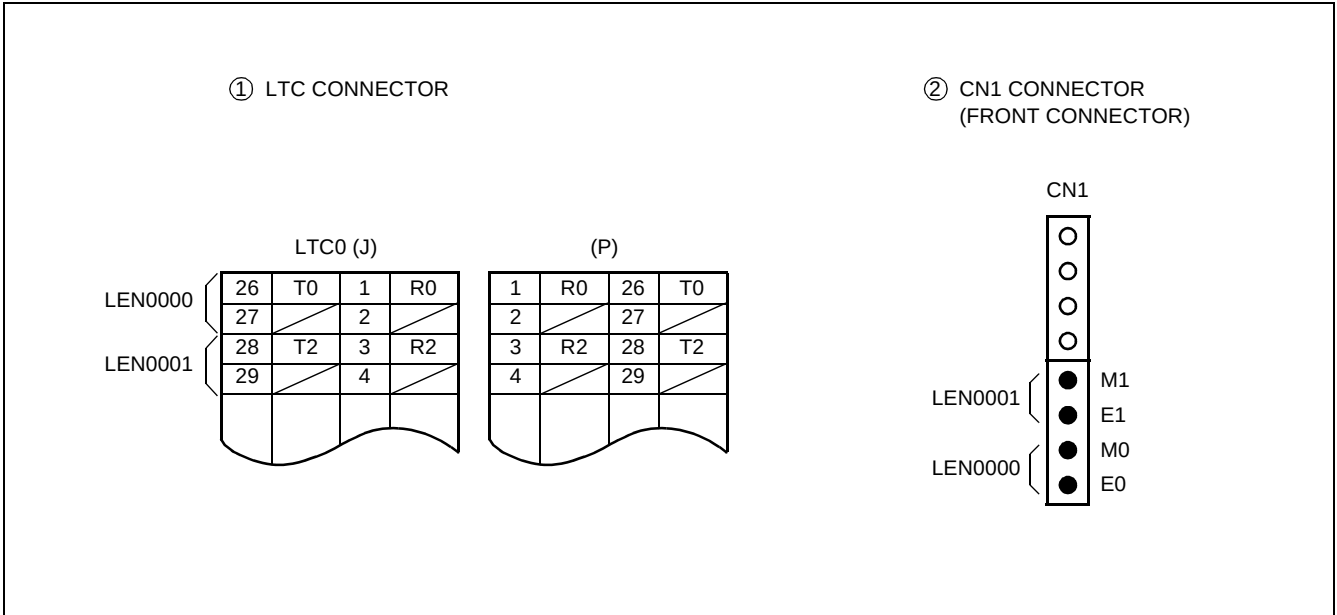


Figure 007-7 MDF Cross Connection for 2W E&M Trunk Card (PN-2ODT) (Continued)

(3) DID Trunk

(a) 2 Line DID Trunk (PN-AUCA) (see [Figure 007-8](#))

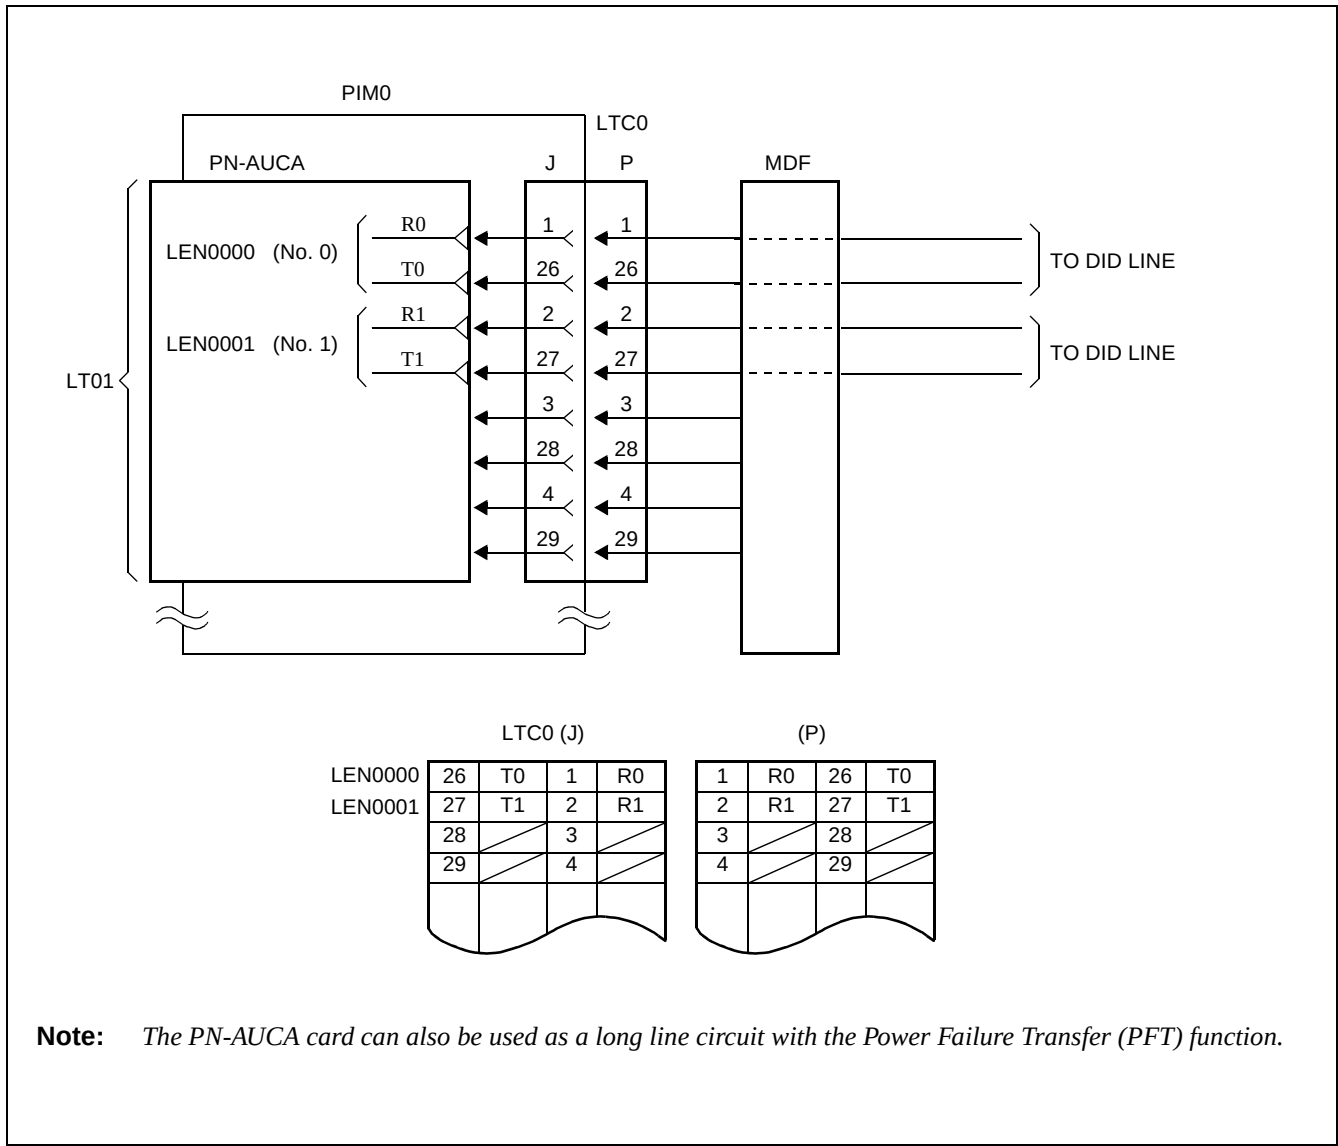


Figure 007-8 MDF Cross Connection for 2 Line DID Trunk Card (PN-AUCA)

(b) 4 Line DID Trunk (PN-4DITB) (see [Figure 007-9](#))

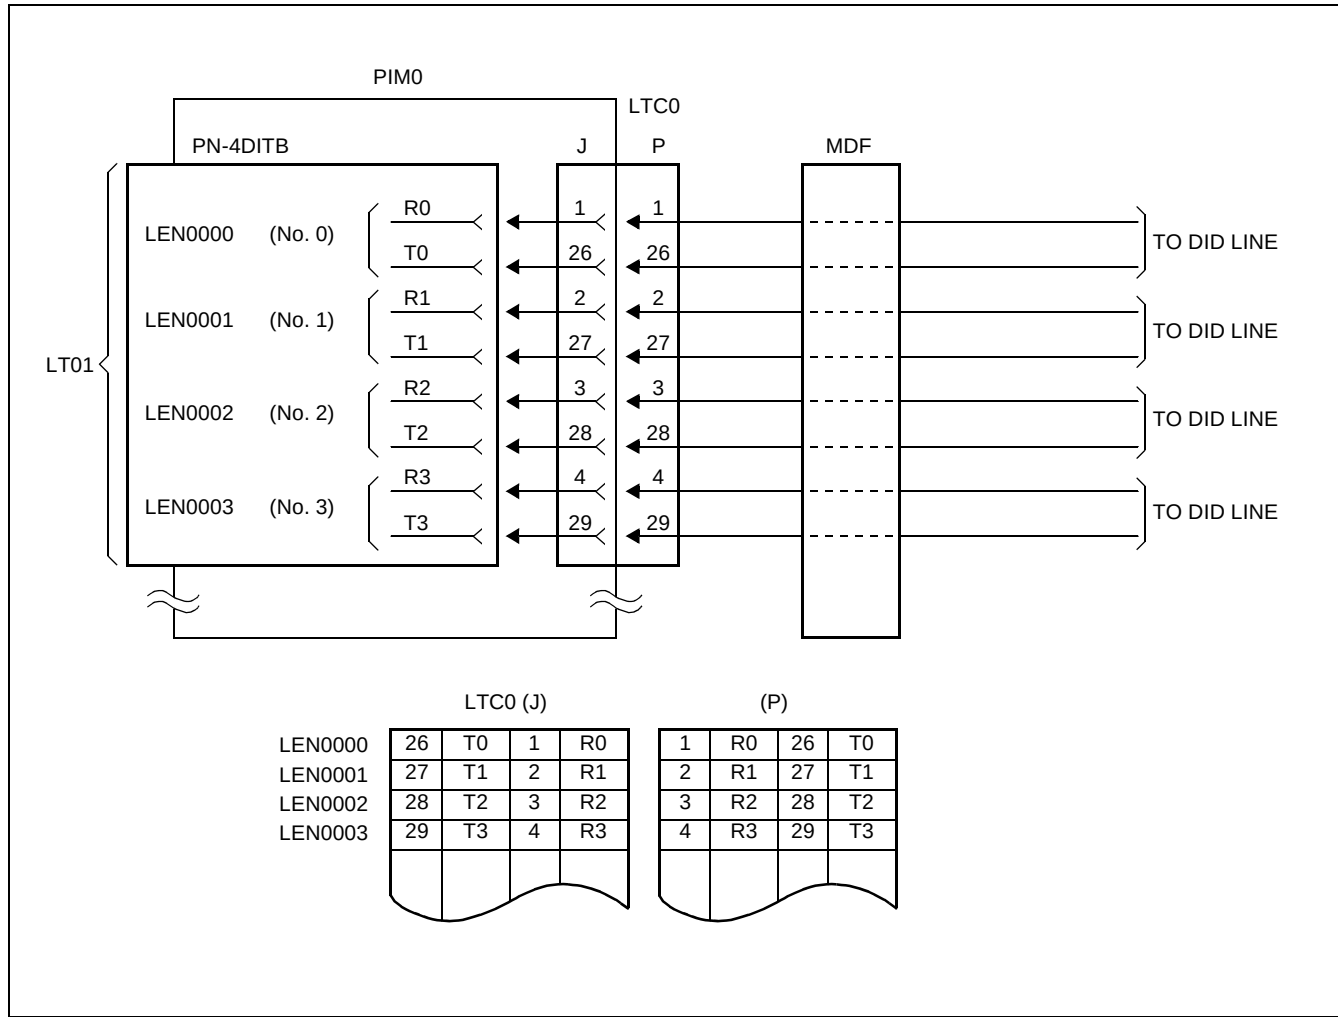


Figure 007-9 MDF Cross Connection for 4 Line DID Trunk Card (PN-4DITB)

- (4) Single Line Telephone
- (a) Standard Line (PN-8LC) (see [Figure 007-10](#))

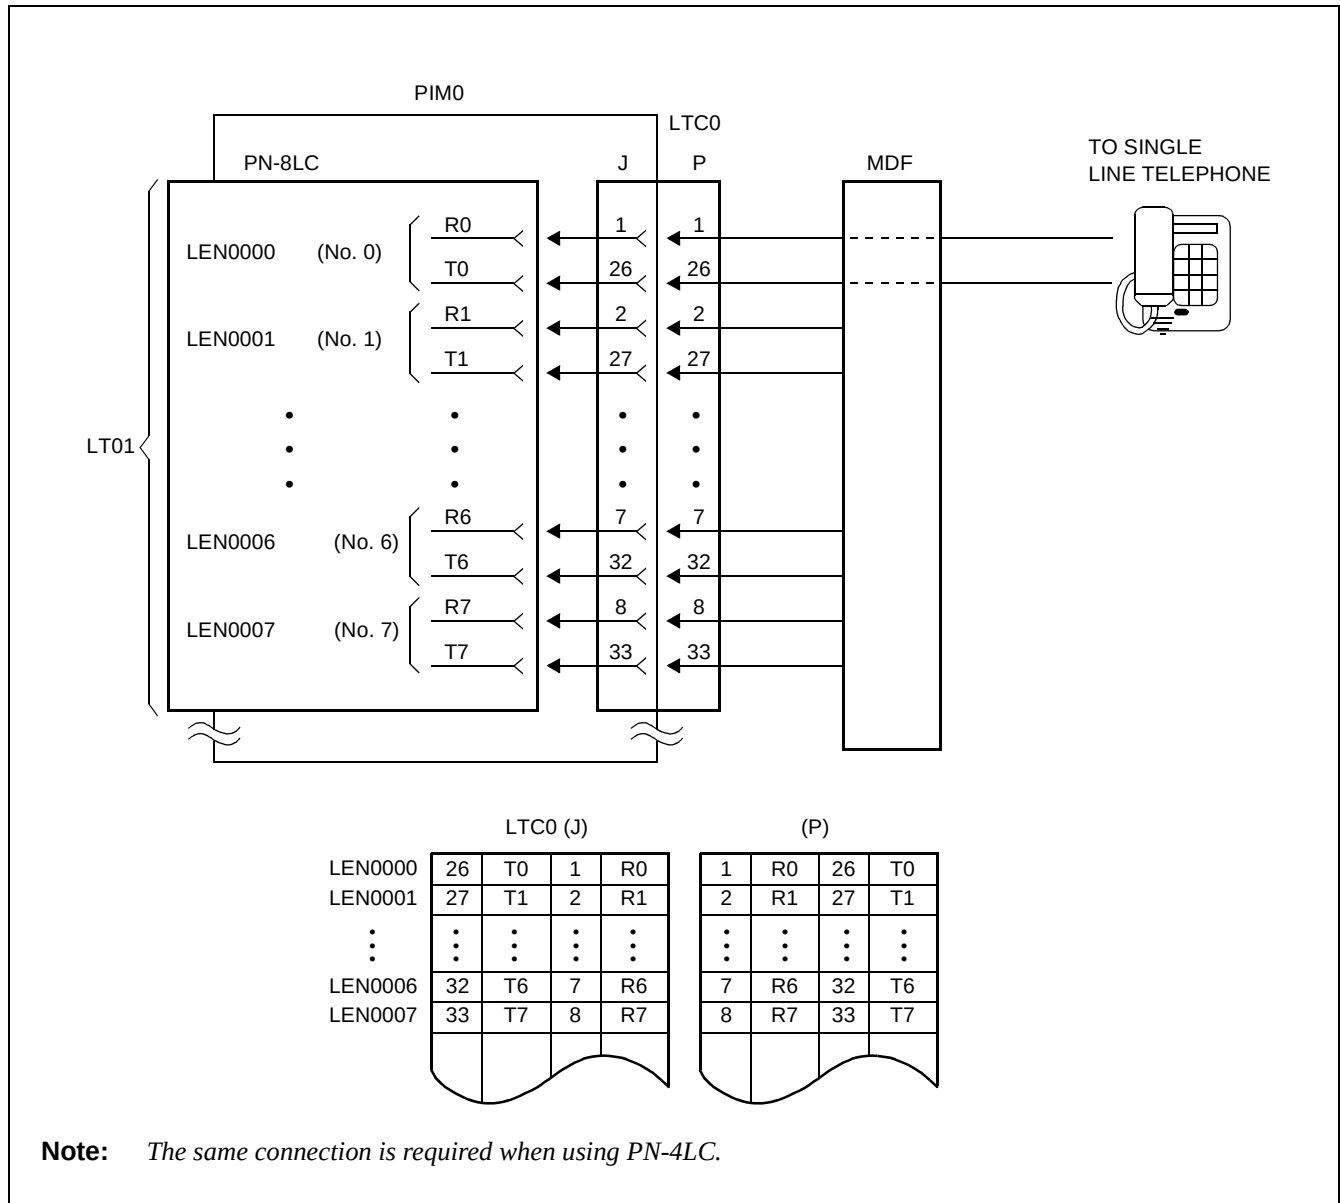


Figure 007-10 MDF Cross Connection for Single Line Telephone (Standard Line)

(b) Long Line (PN-AUCA) (see [Figure 007-11](#))

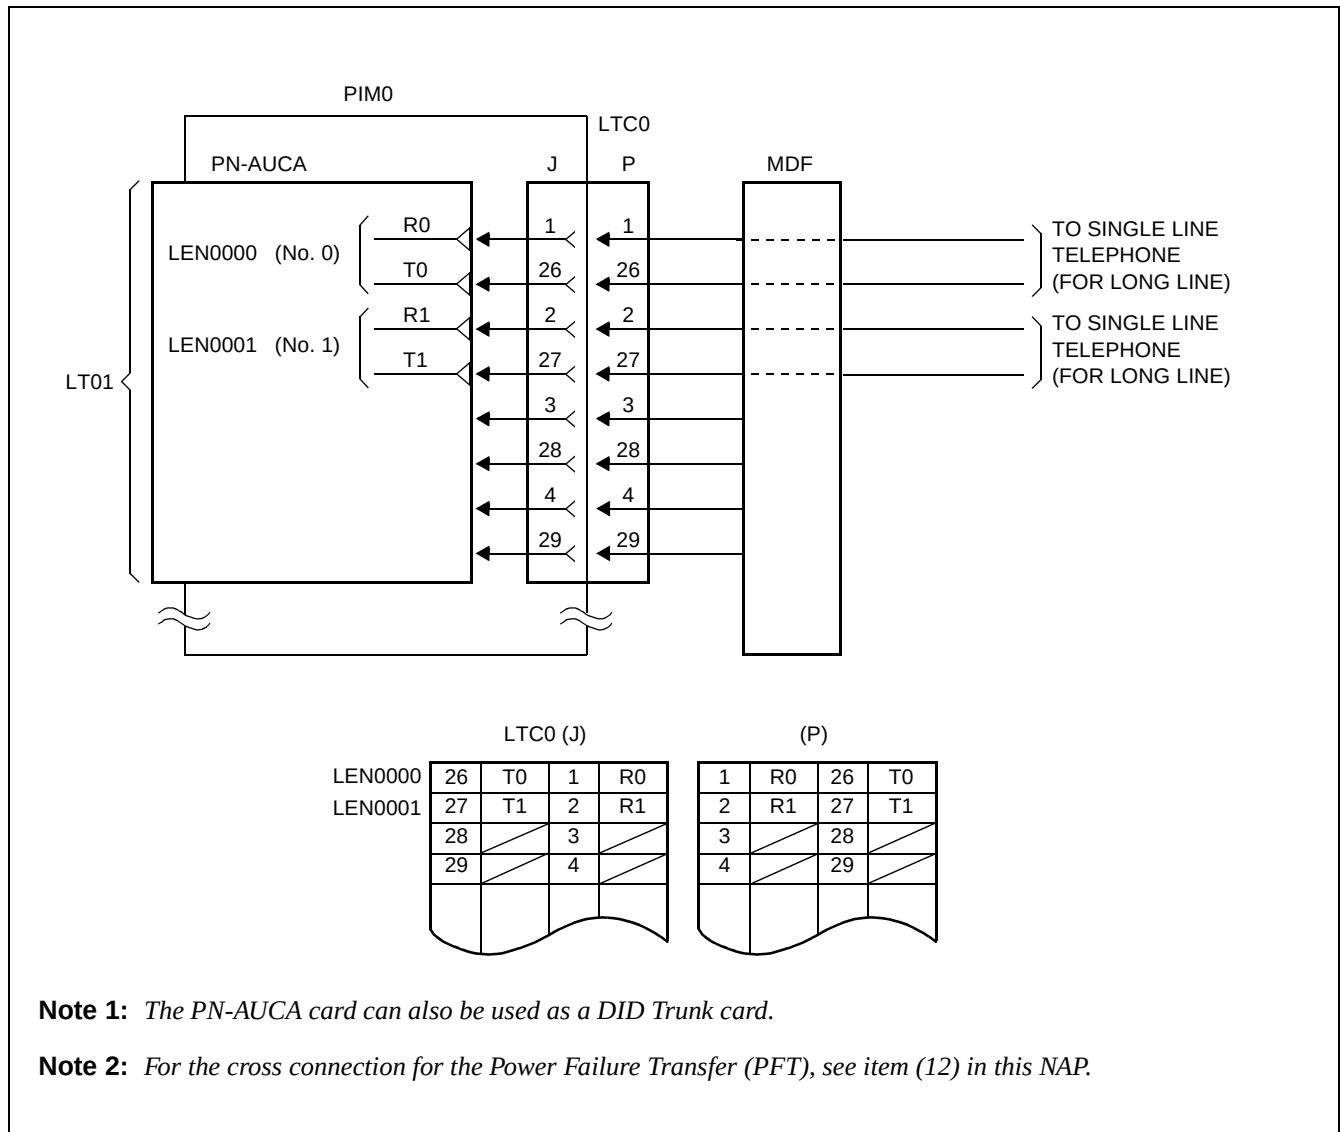


Figure 007-11 MDF Cross Connection for Single Line Telephone (Long Line)

- (5) Multiline Terminal/DSS Console
- (a) Standard Line (PN-8DLC) (see [Figure 007-12](#))

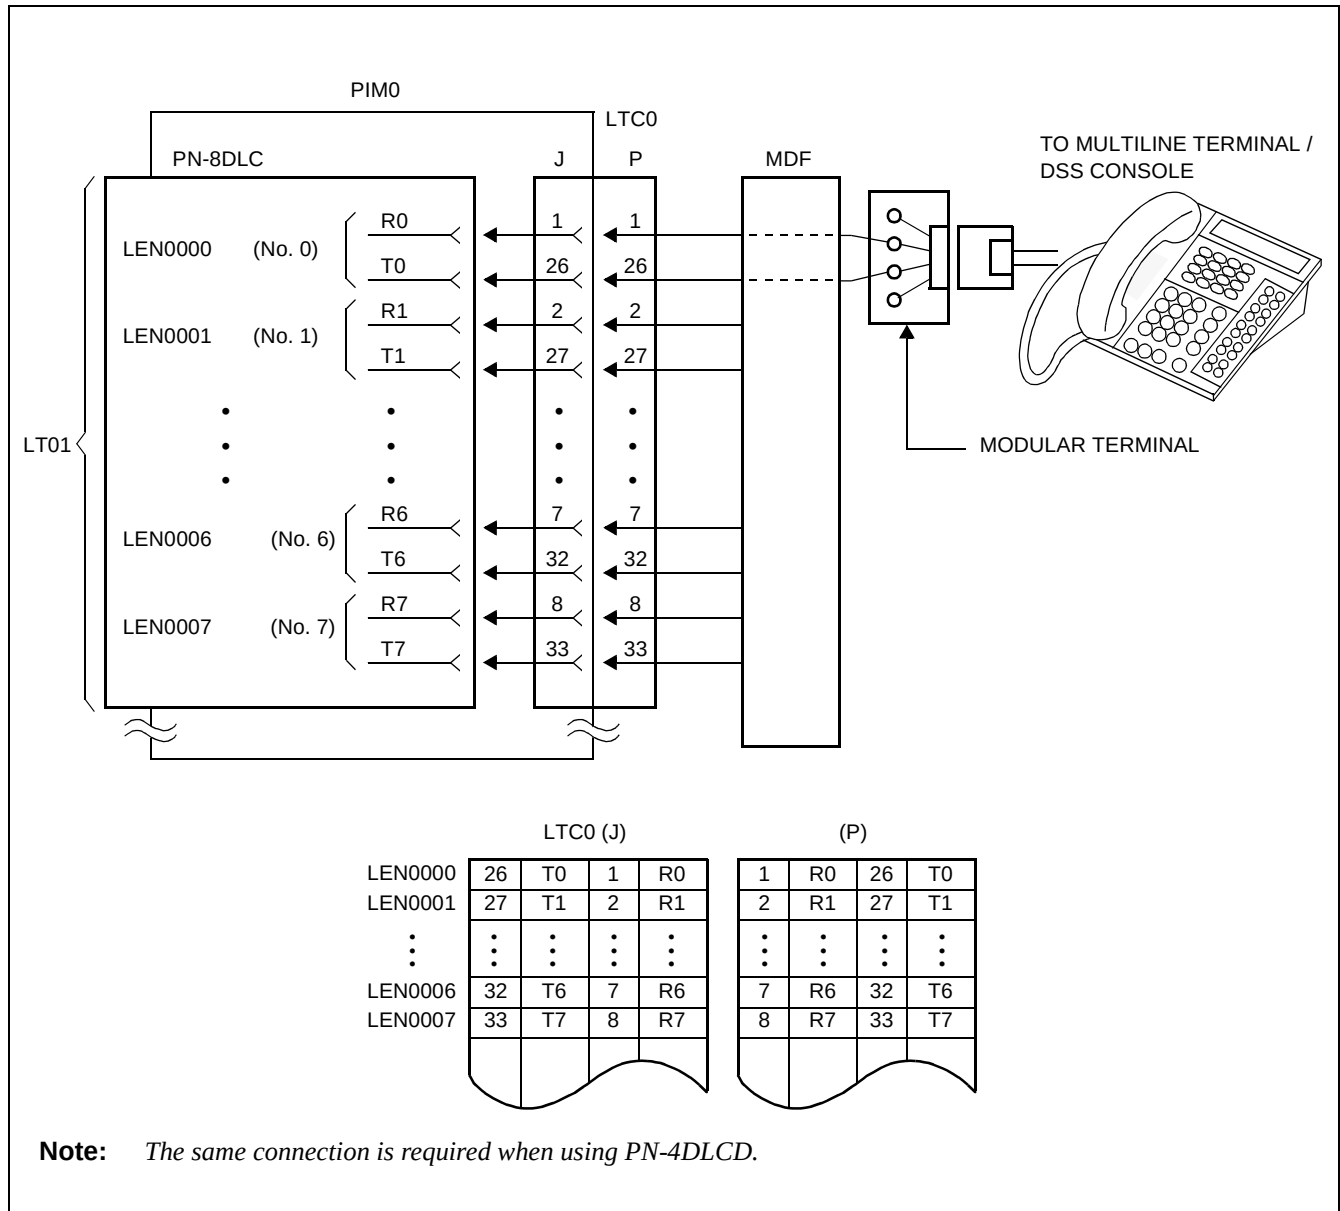


Figure 007-12 MDF Cross Connection for Multiline Terminal/DSS Console (Standard Line)

(b) Long Line (PN-2DLCB/N) (see [Figure 007-13](#))

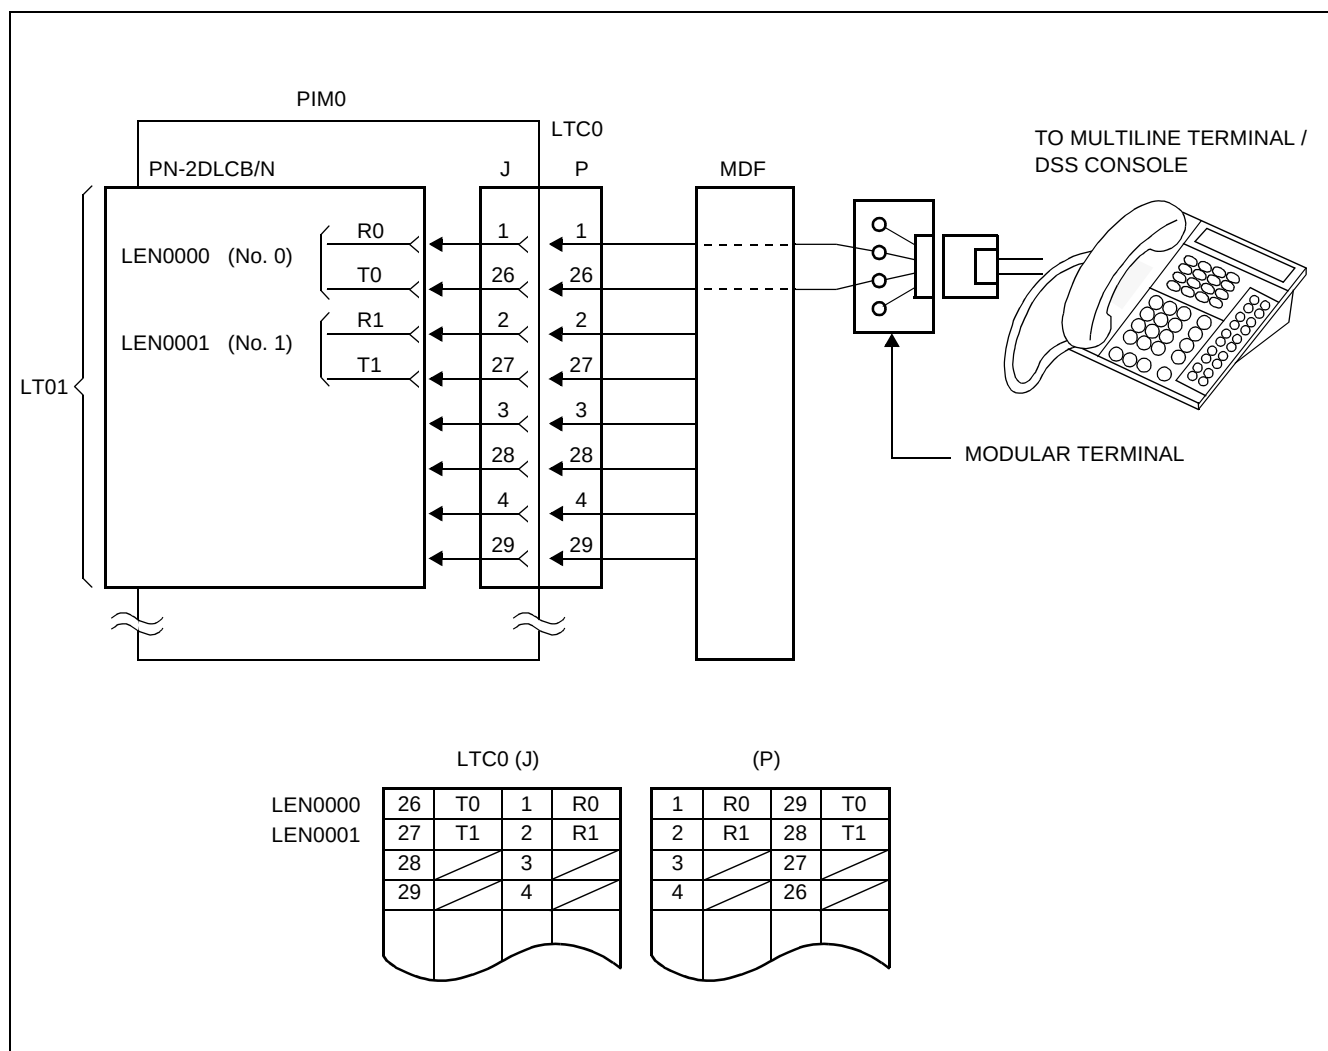


Figure 007-13 MDF Cross Connection for Multiline Terminal/DSS Console (Long Line)

NAP-200-007
Sheet 21/55
Termination of Cables on MDF

(6) SN610- ATTCON

(a) Installation of SN610 ATTCON

STEP 1: Screw the handset support onto the bottom of the console as shown in [Figure 007-14](#).

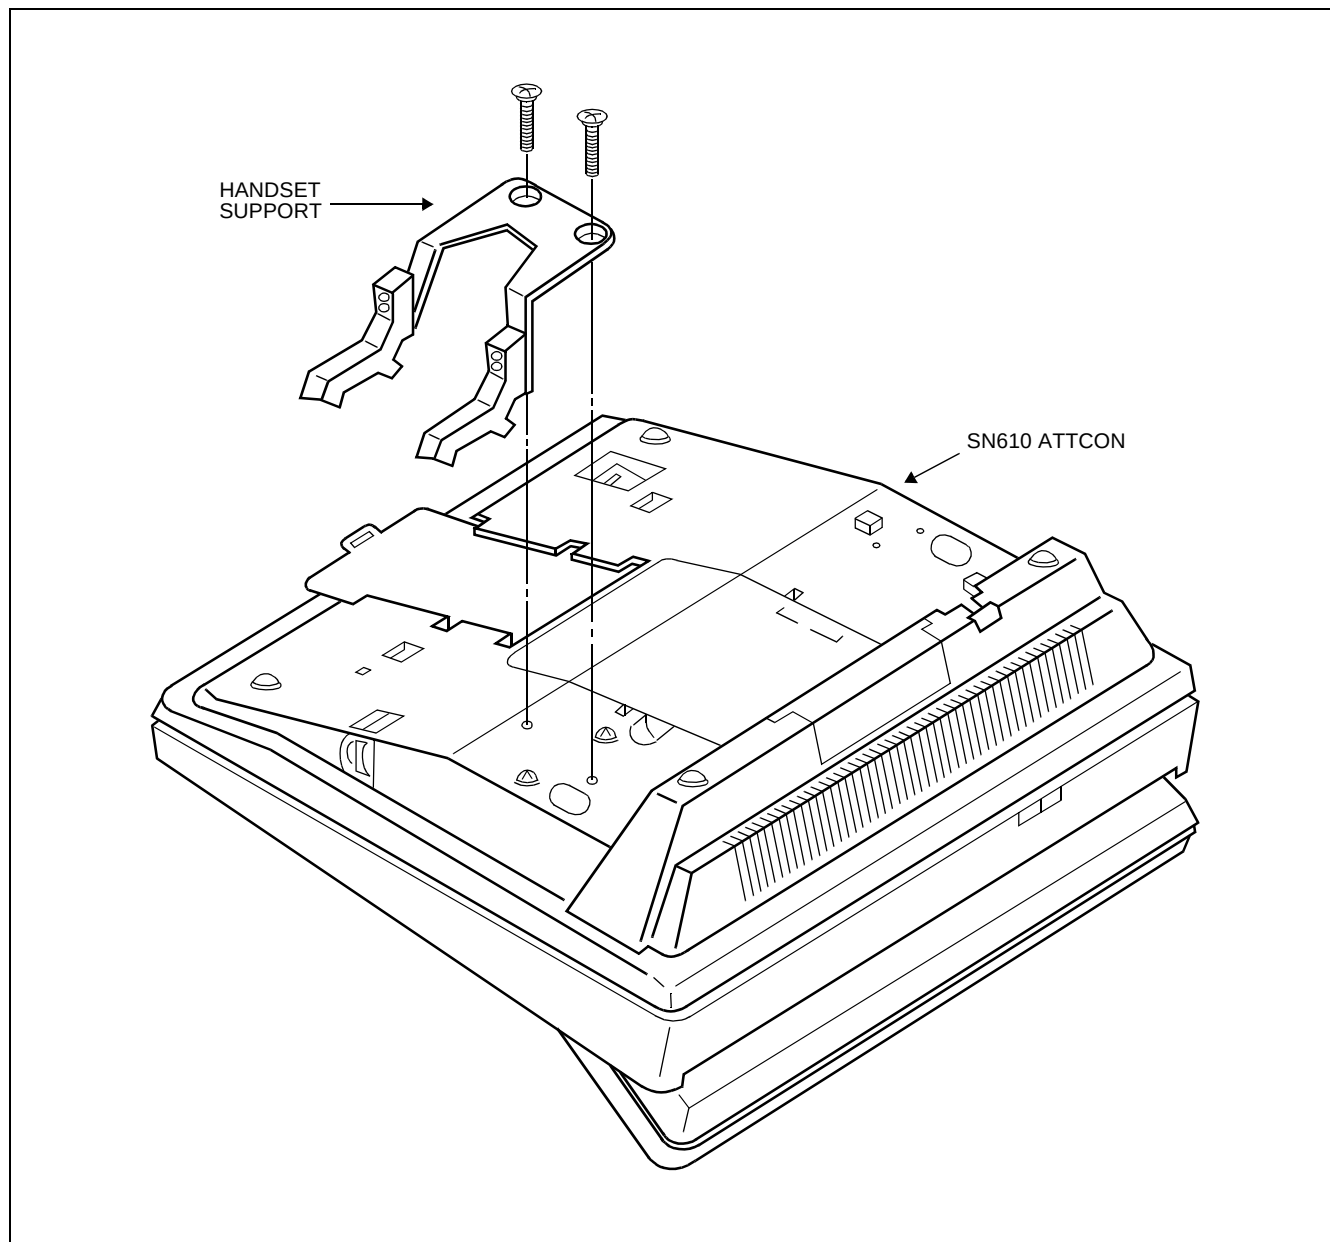


Figure 007-14 Mounting Handset Support to SN610 ATTCON

NAP-200-007
Sheet 22/55
Termination of Cables on MDF

STEP 2: To provide the console with the headset in place of the handset, unplug the modular cord from the handset and then plug the modular cord to the jack set as shown in [Figure 007-15](#).

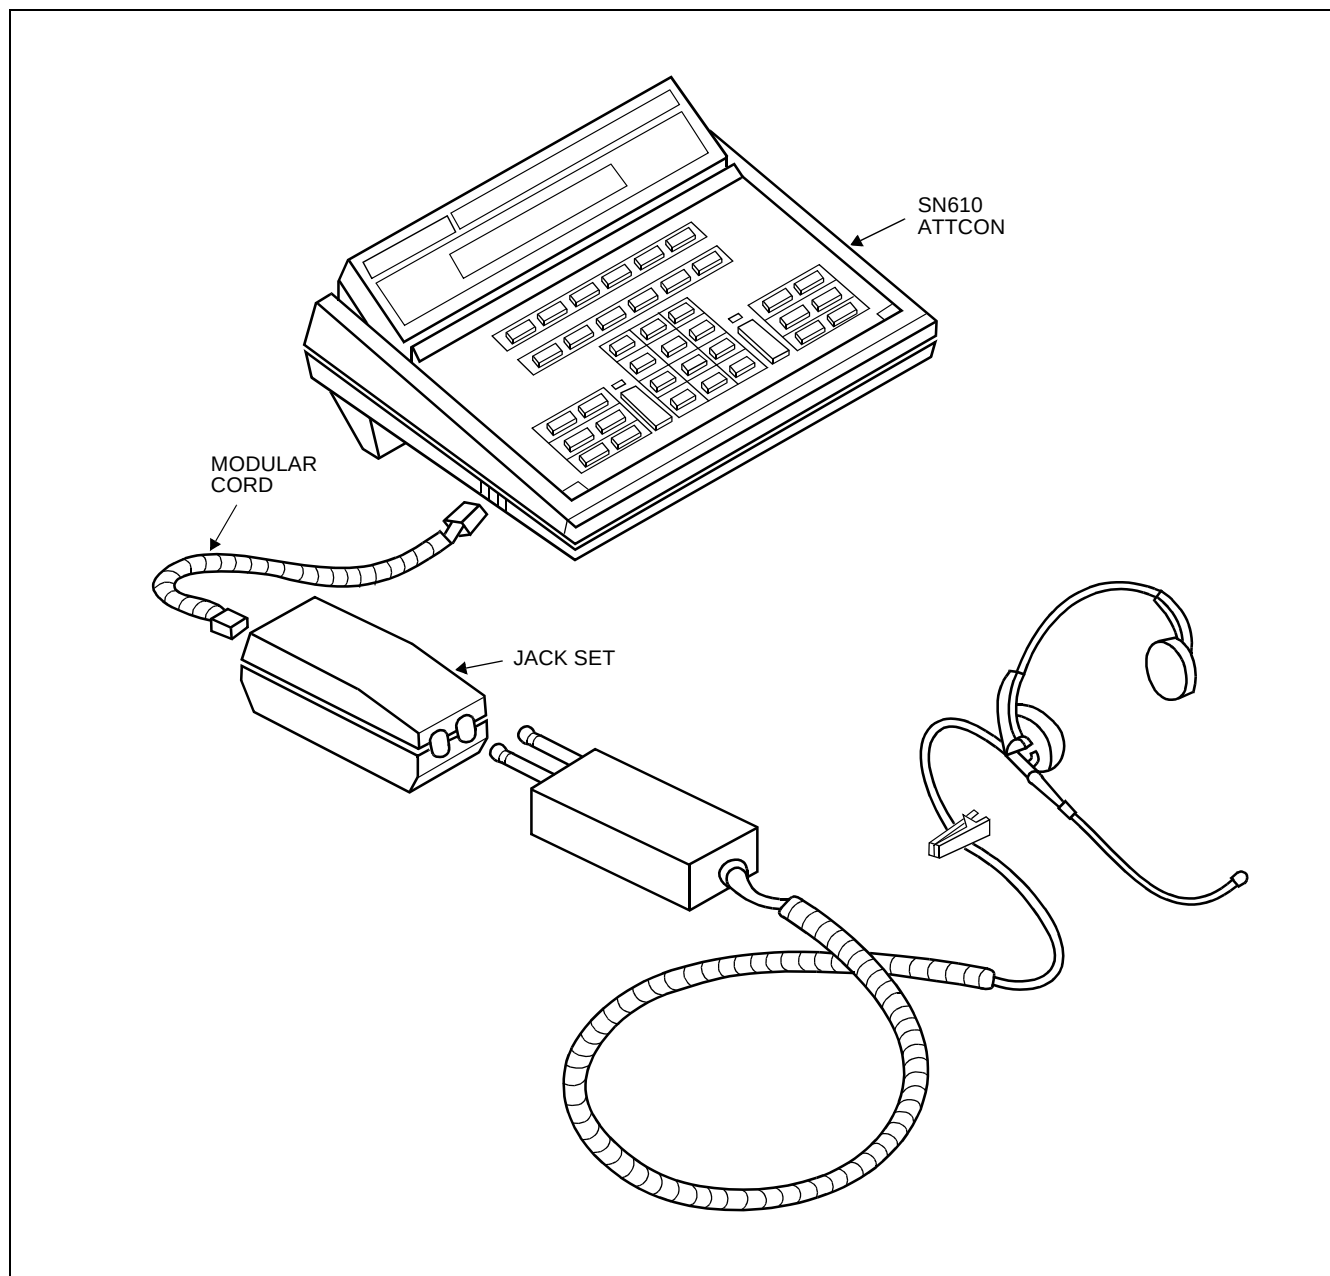


Figure 007-15 Jack Set Installation for SN610 ATTCON

NAP-200-007
Sheet 23/55
Termination of Cables on MDF

STEP 3: Set the switch located inside the console according to the type of headset/handset connected. Refer to [Figure 007-16](#).

- Slide the directory out of the way.

Then insert a flat screw driver's blade into the notched opening and apply light upward pressure until the access panel is clear of the front lip. At the same time apply pressure (toward you) at the rear of the pedestal to move the access panel.

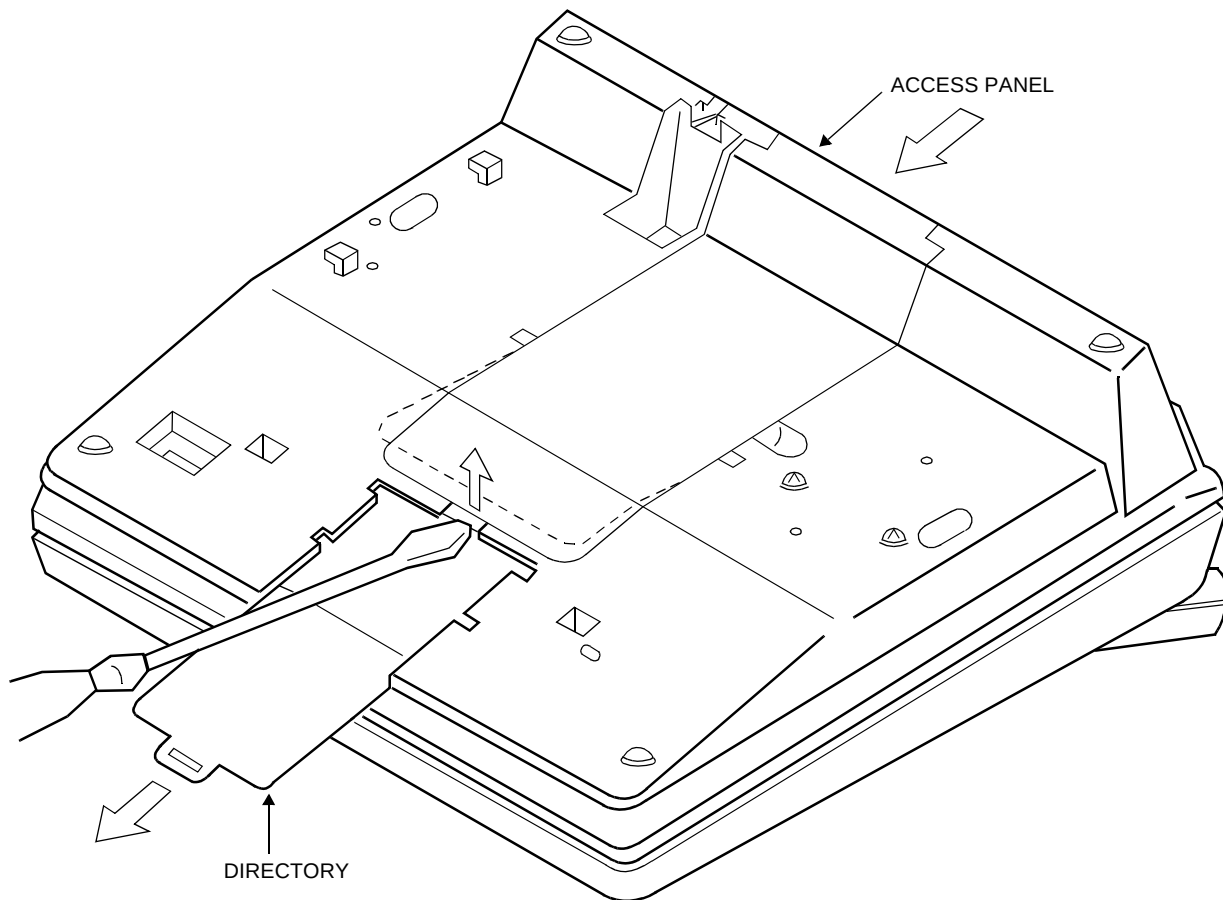


Figure 007-16 SN610 ATTCON Switch Setting

- Set the switch according to the type of headset/handset connected.
C: Carbon Type Handset/Headset
S: SUPRA Headset
D: D^{term} Type Handset
- Replace the directory and access panel.

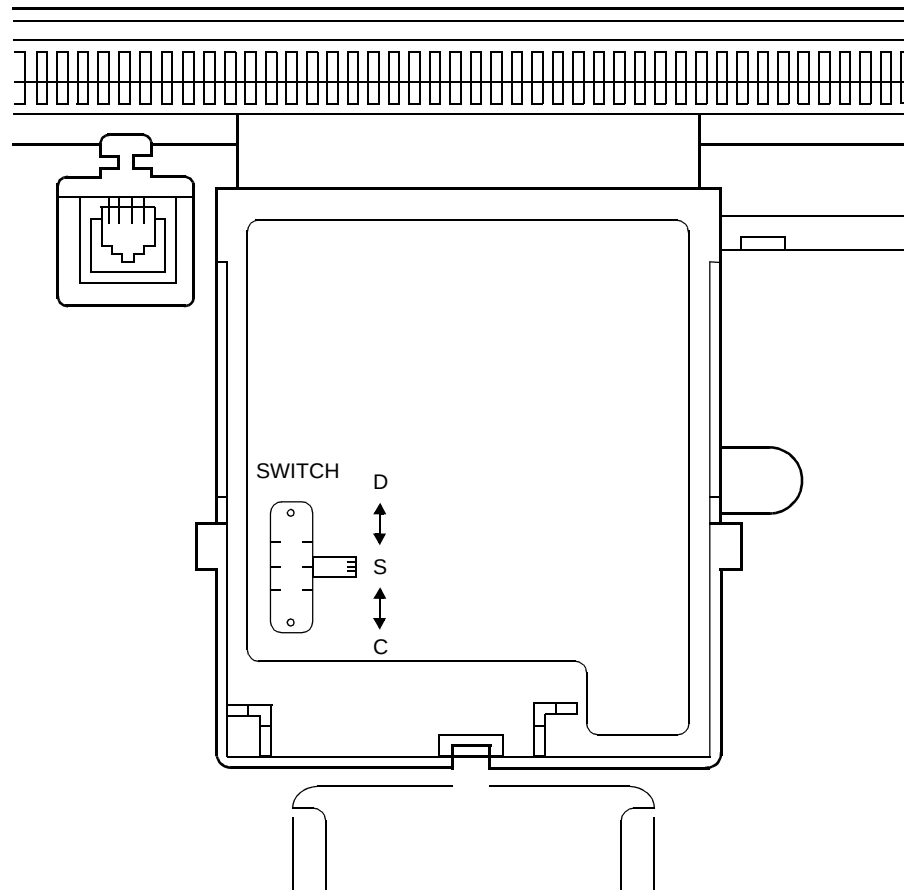


Figure 007-16 SN610 ATTCON Switch Setting (Continued)

NAP-200-007
Sheet 25/55
Termination of Cables on MDF

STEP 4: Plug the line cord into the modular jack located at the bottom of the console as shown in [Figure 006-16](#).
For the MDF cross connection for the SN610 ATTCON, refer to [Figure 007-17](#).

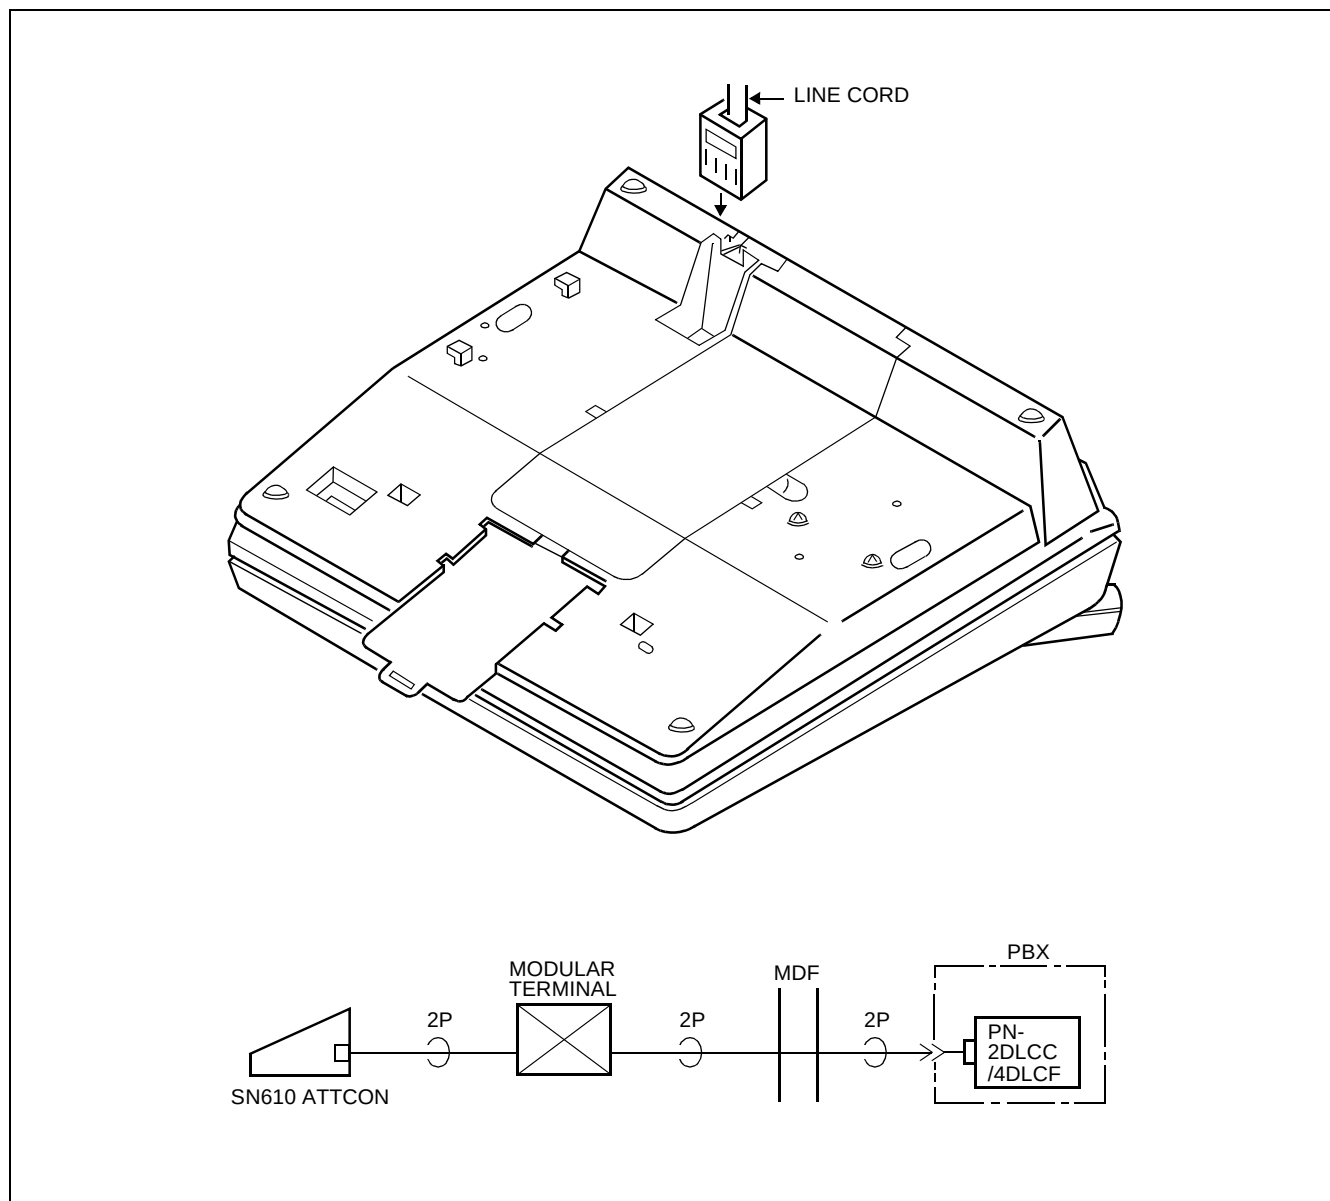


Figure 007-17 Cable Connection to SN610 ATTCON

(b) MDF Cross Connection (see [Figure 007-18](#))

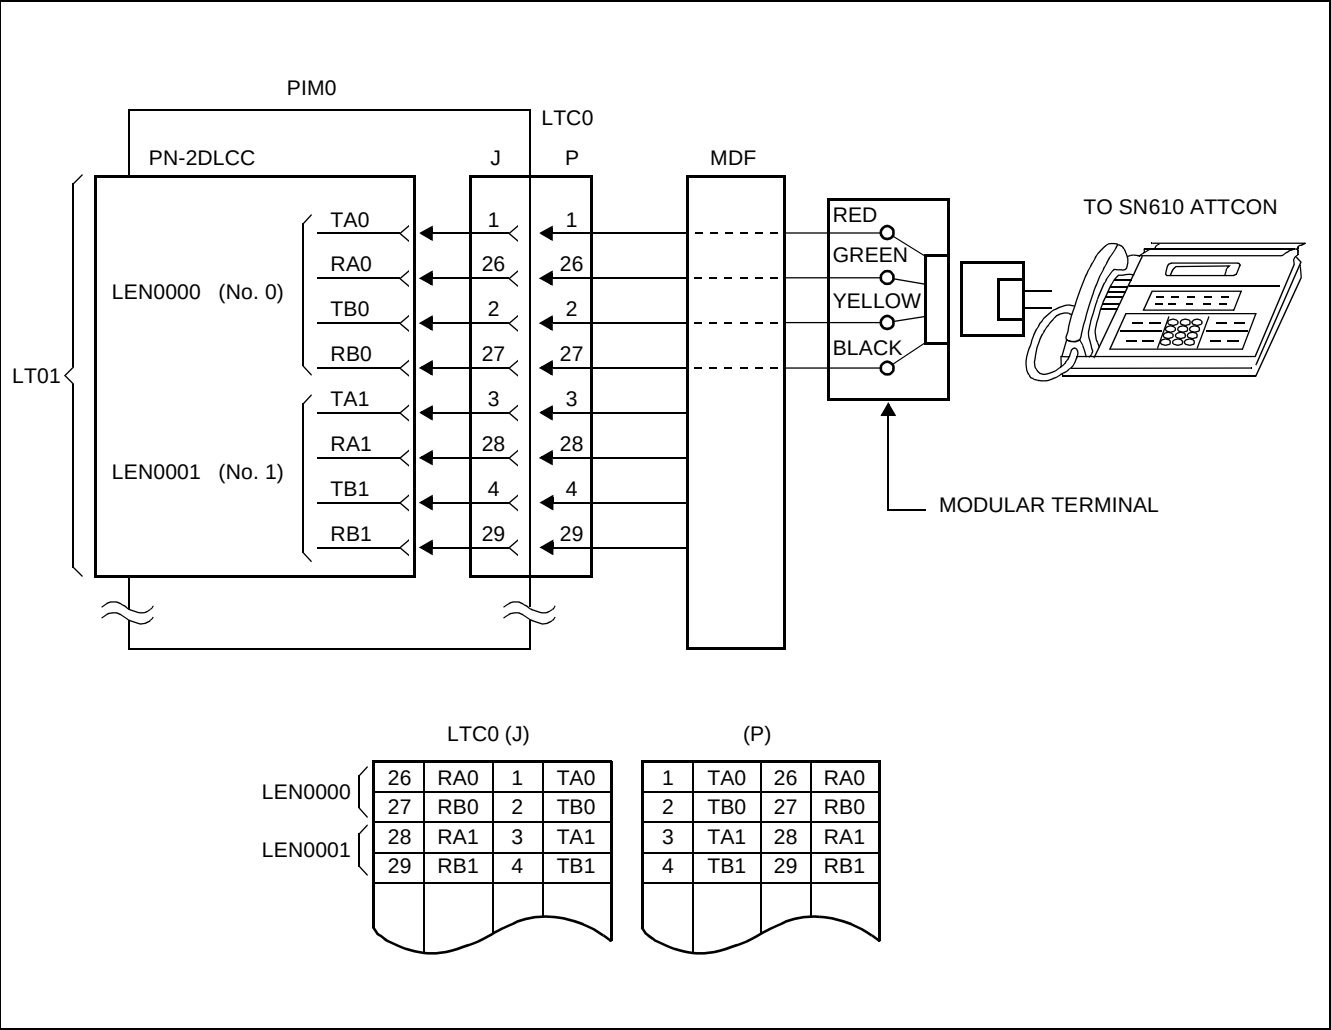


Figure 007-18 MDF Cross Connection for SN610 ATTCON

(7) Day/Night Mode Change by External Key (see [Figure 007-19](#))

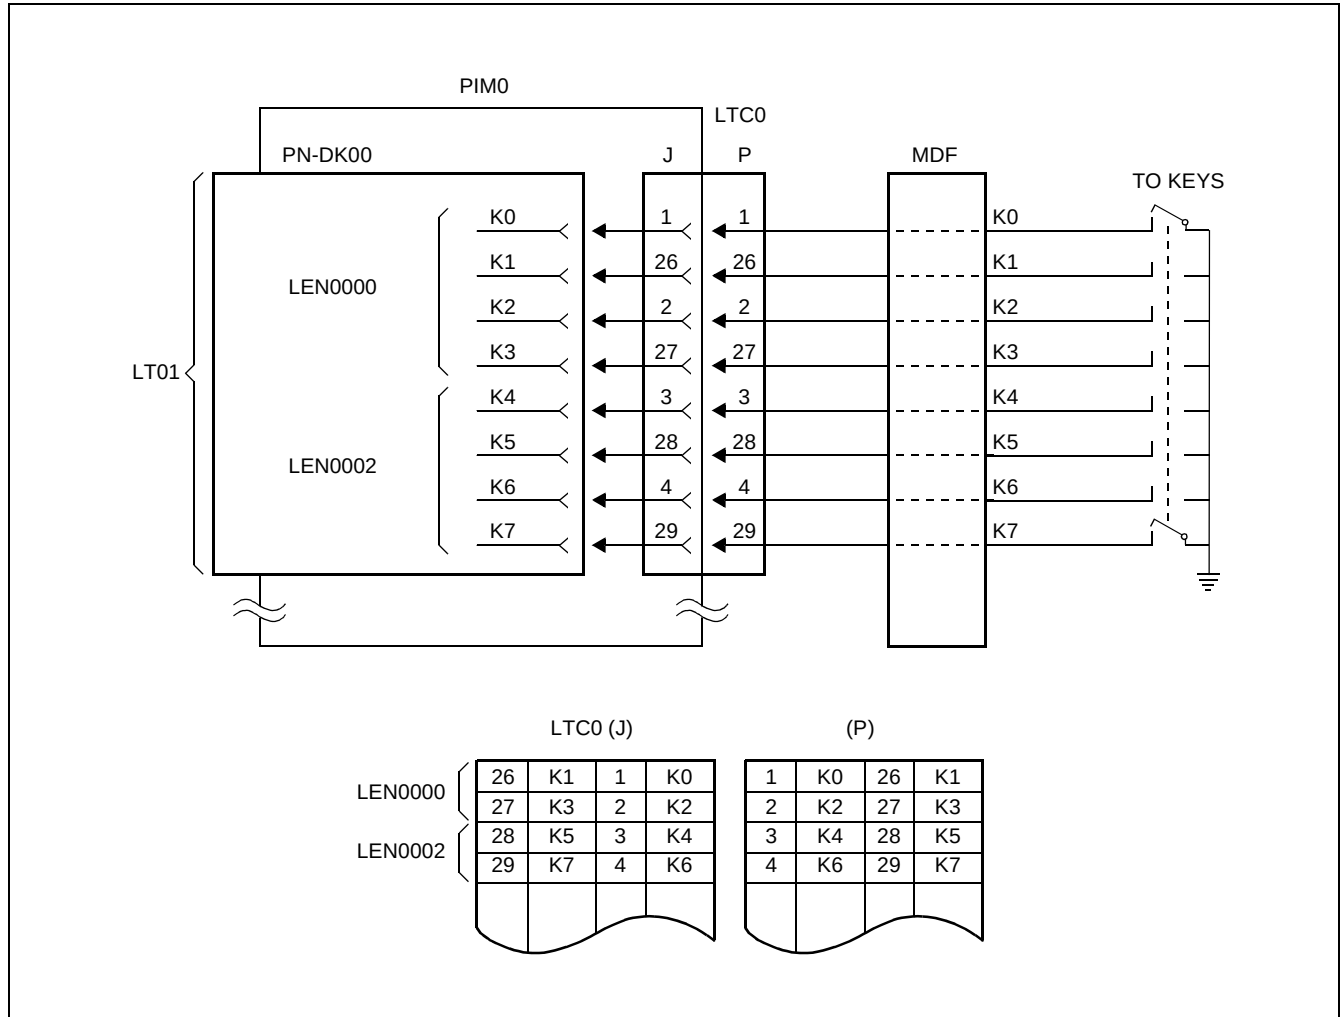


Figure 007-19 MDF Cross Connection for Day/Night Mode Change by External Key

NAP-200-007
Sheet 28/55
Termination of Cables on MDF

(8) External TAS Indicator

(a) Outline of the Connection (see [Figure 007-20](#))

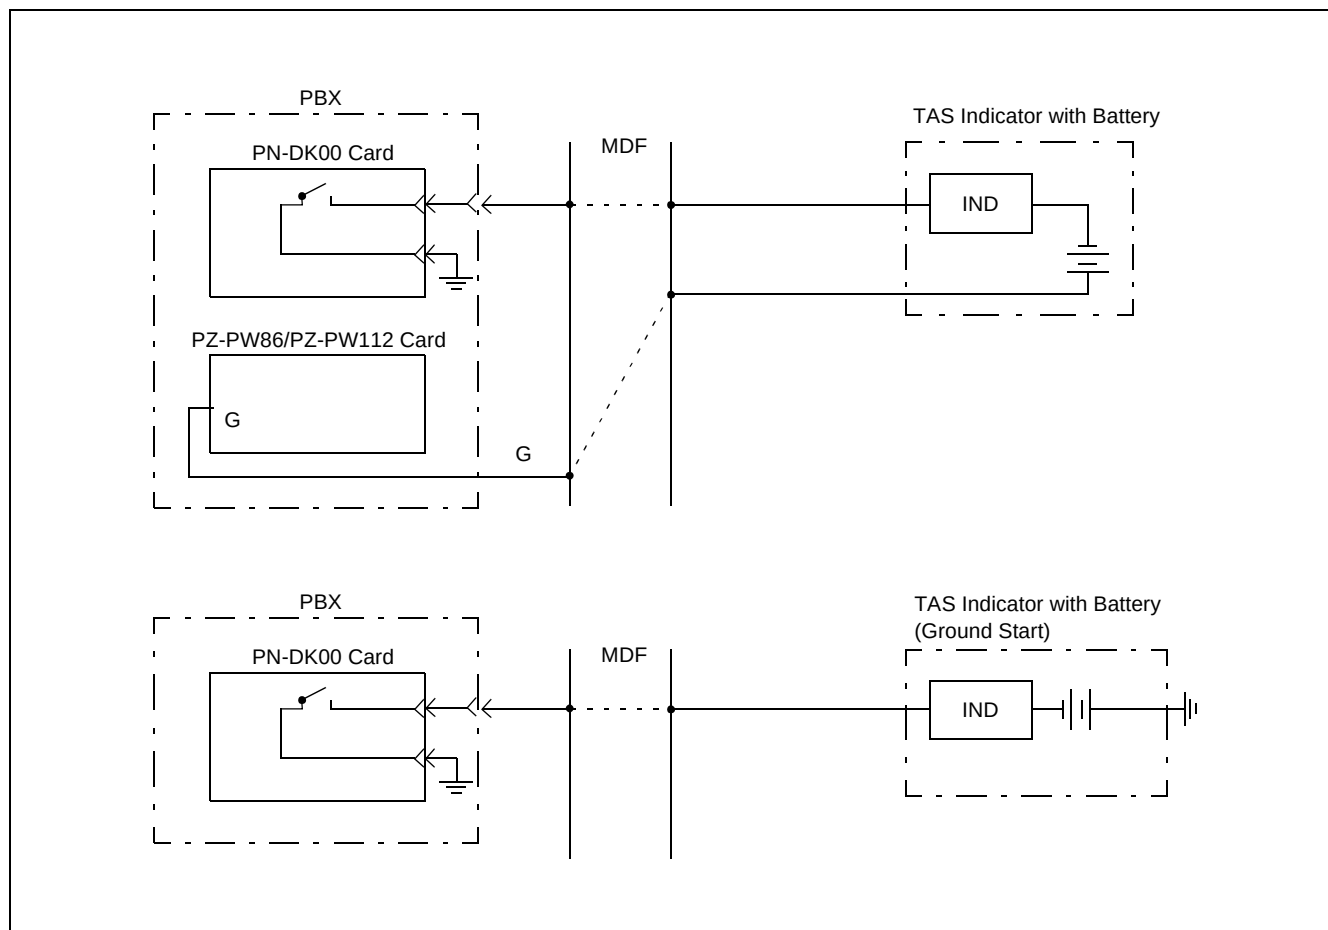


Figure 007-20 External TAS Indicator Connection Outline

(b) MDF Cross Connection

- When using a TAS Indicator with a Battery (see [Figure 007-21](#))

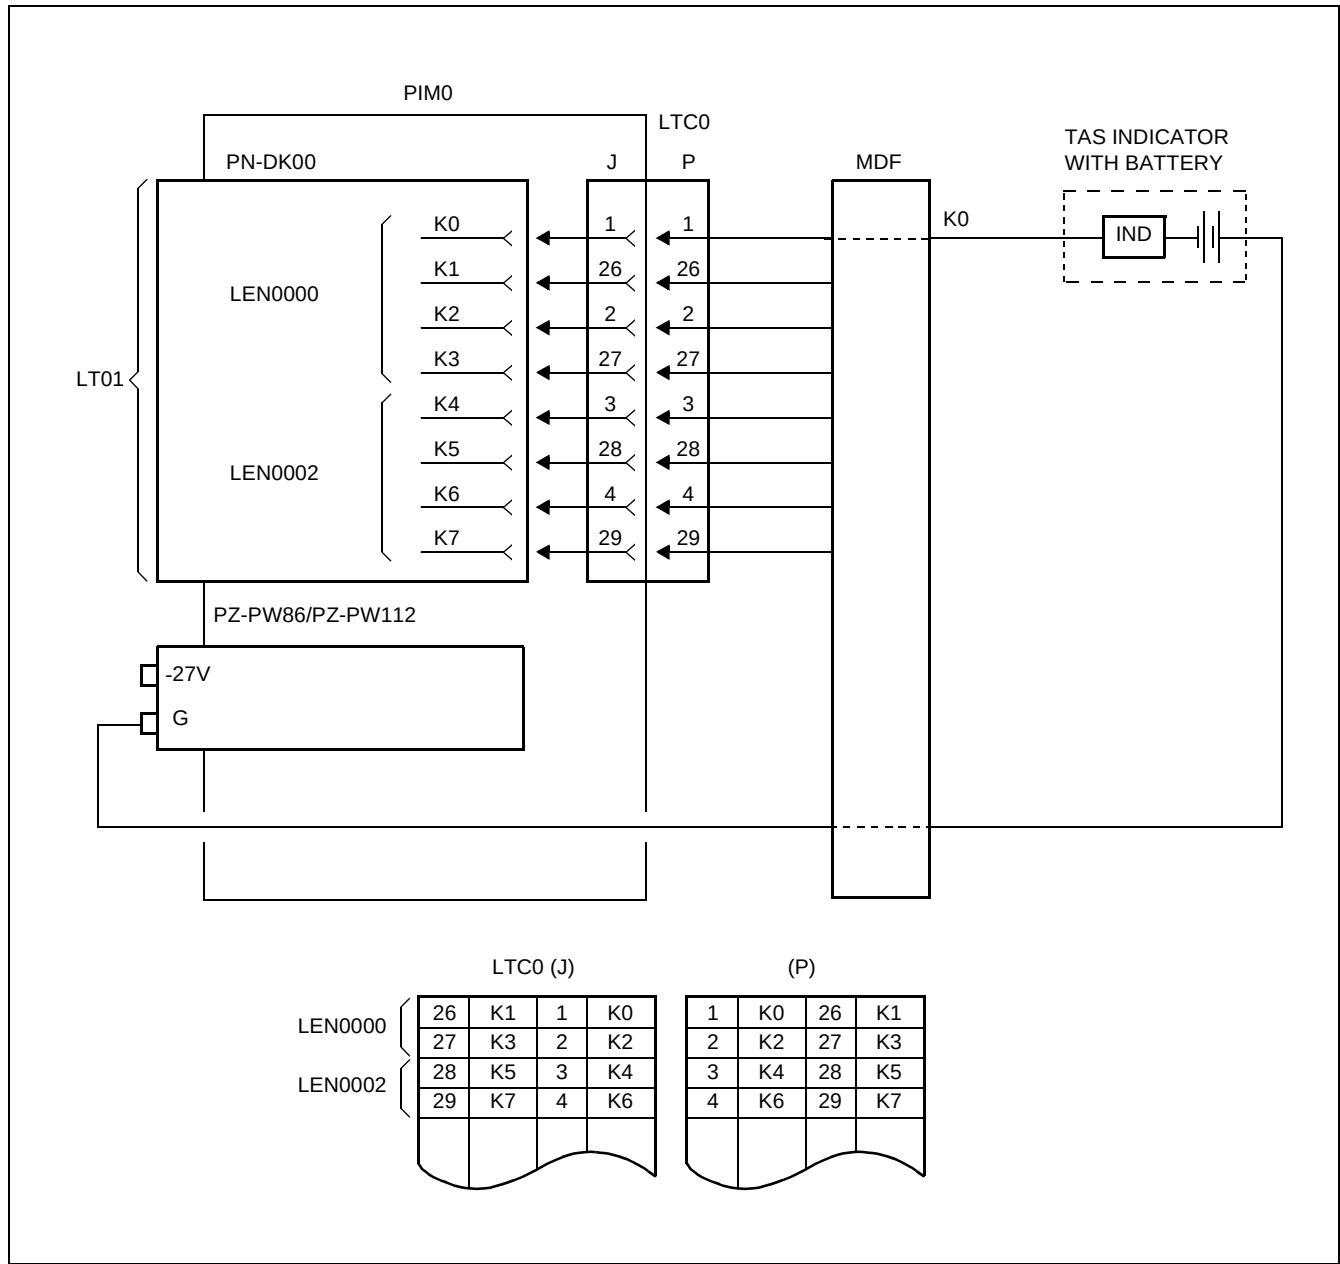


Figure 007-21 MDF Cross Connection for TAS Indicator with Battery

- When using a TAS Indicator with a Battery (Ground Start) (see [Figure 007-22](#))

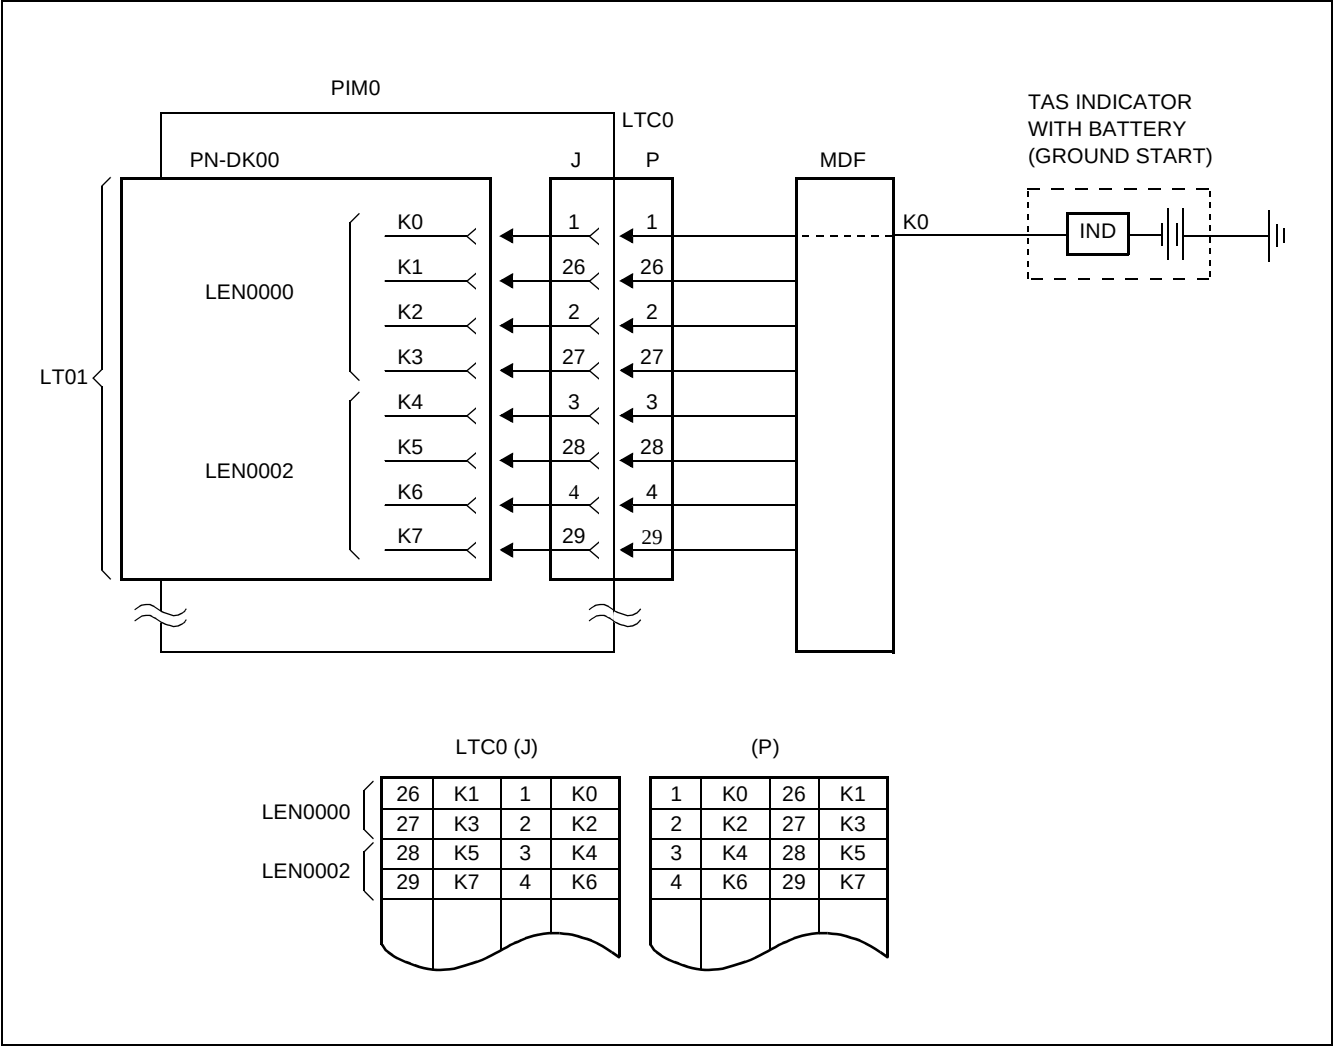


Figure 007-22 MDF Cross Connection for TAS Indicator with Battery (Ground Start)

NAP-200-007
Sheet 31/55
Termination of Cables on MDF

(9) Paging Equipment

Figure 007-23 and Figure 007-24 show an example of the cross connection for a customer-owned paging equipment.

Requirement for Paging Equipment

- Input Impedance : 600 ohm
- Control Method : Start - Ground Start **Note**
: Stop - Ground Off (Open)

Note: The current capacity of relay contact (PN-DK00 card) is 0.125 A.

(a) Outline of the Connection (see Figure 007-23)

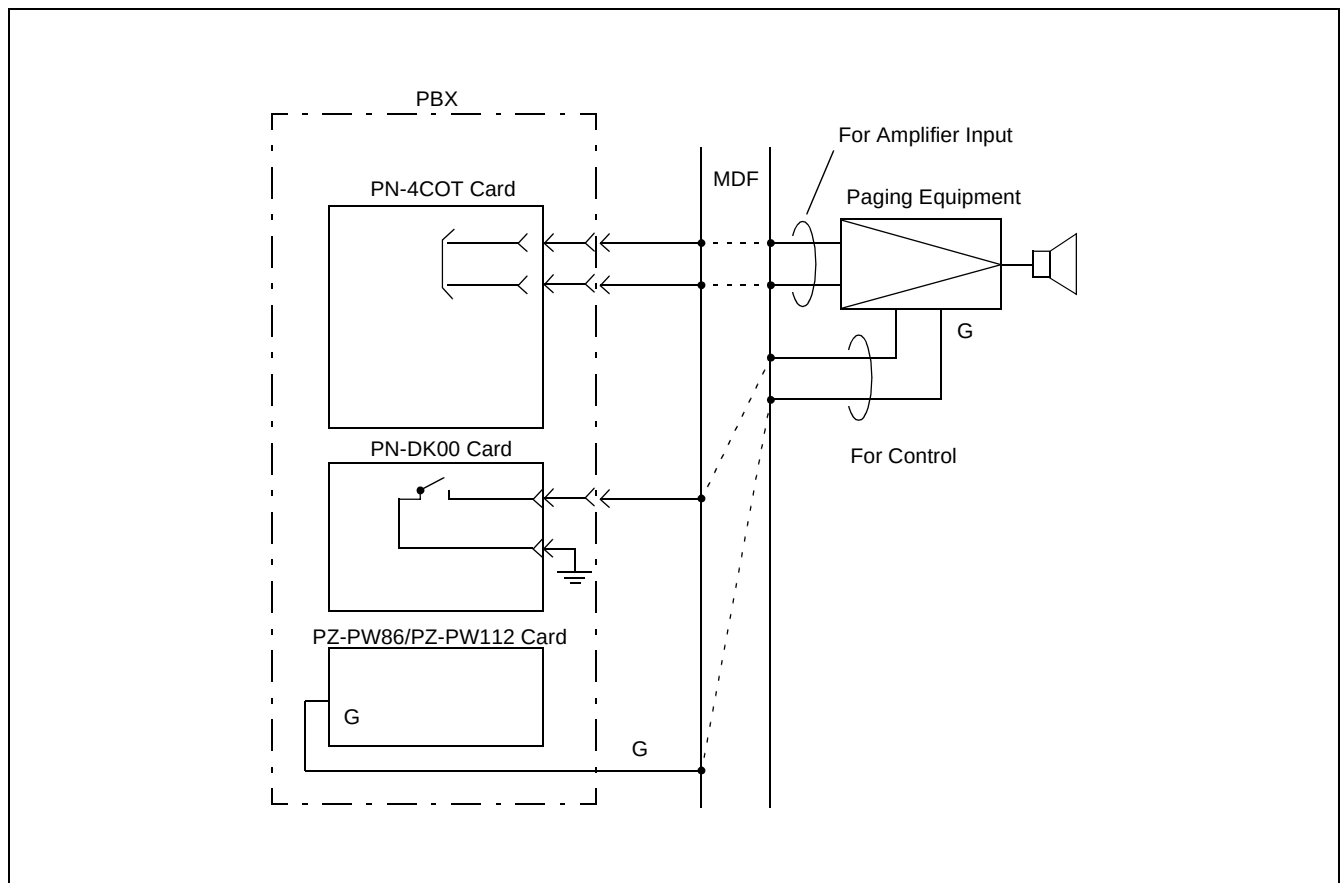


Figure 007-23 Paging Equipment Connection Outline

(b) MDF Cross Connection (see [Figure 007-24](#))

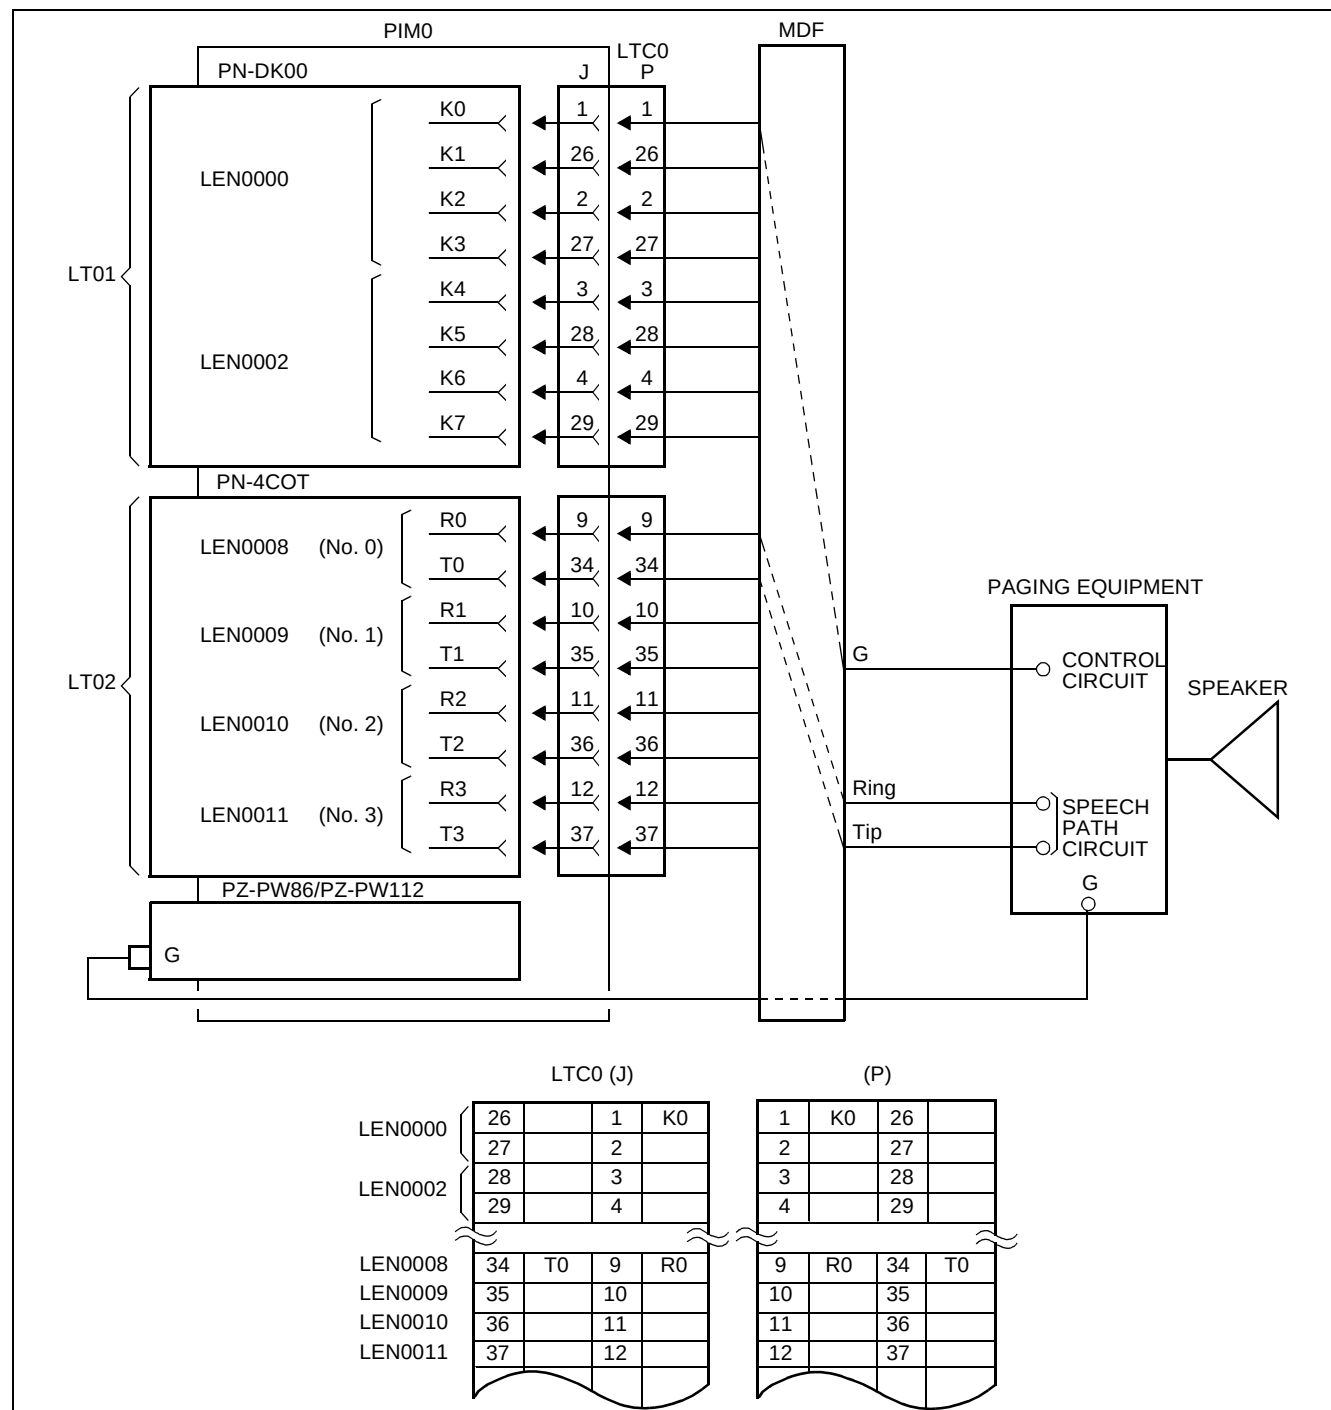


Figure 007-24 MDF Cross Connection for Paging Equipment

NAP-200-007
Sheet 33/55
Termination of Cables on MDF

(10) External Tone Source Equipment

The cross connection for a customer owned external tone source equipment is shown in [Figure 007-25](#), as an example.

Requirement for External Tone Source Equipment

- Output level : Less than 0 dbm (Adjustable)
- Output impedance : Less than 1 k Ω (When using PN-4COT and PN-DK00)
: Less than 10 k Ω (When using Pin Jacks on PN-TNTA)
- Control Method : Start - Ground Start **Note 1**
: Stop - Ground Off (Open)

Note 1: *The current capacity of relay contact (PN-DK00 card) is 0.125 A.*

Note 2: *When connecting the external tone source equipment using the PN-4COT / 8COT and PN-DK00 cards, an appropriate diode must be installed on the MDF, as shown in [Figure 007-25](#).*

(a) Outline of the Connection (see [Figure 007-25](#))

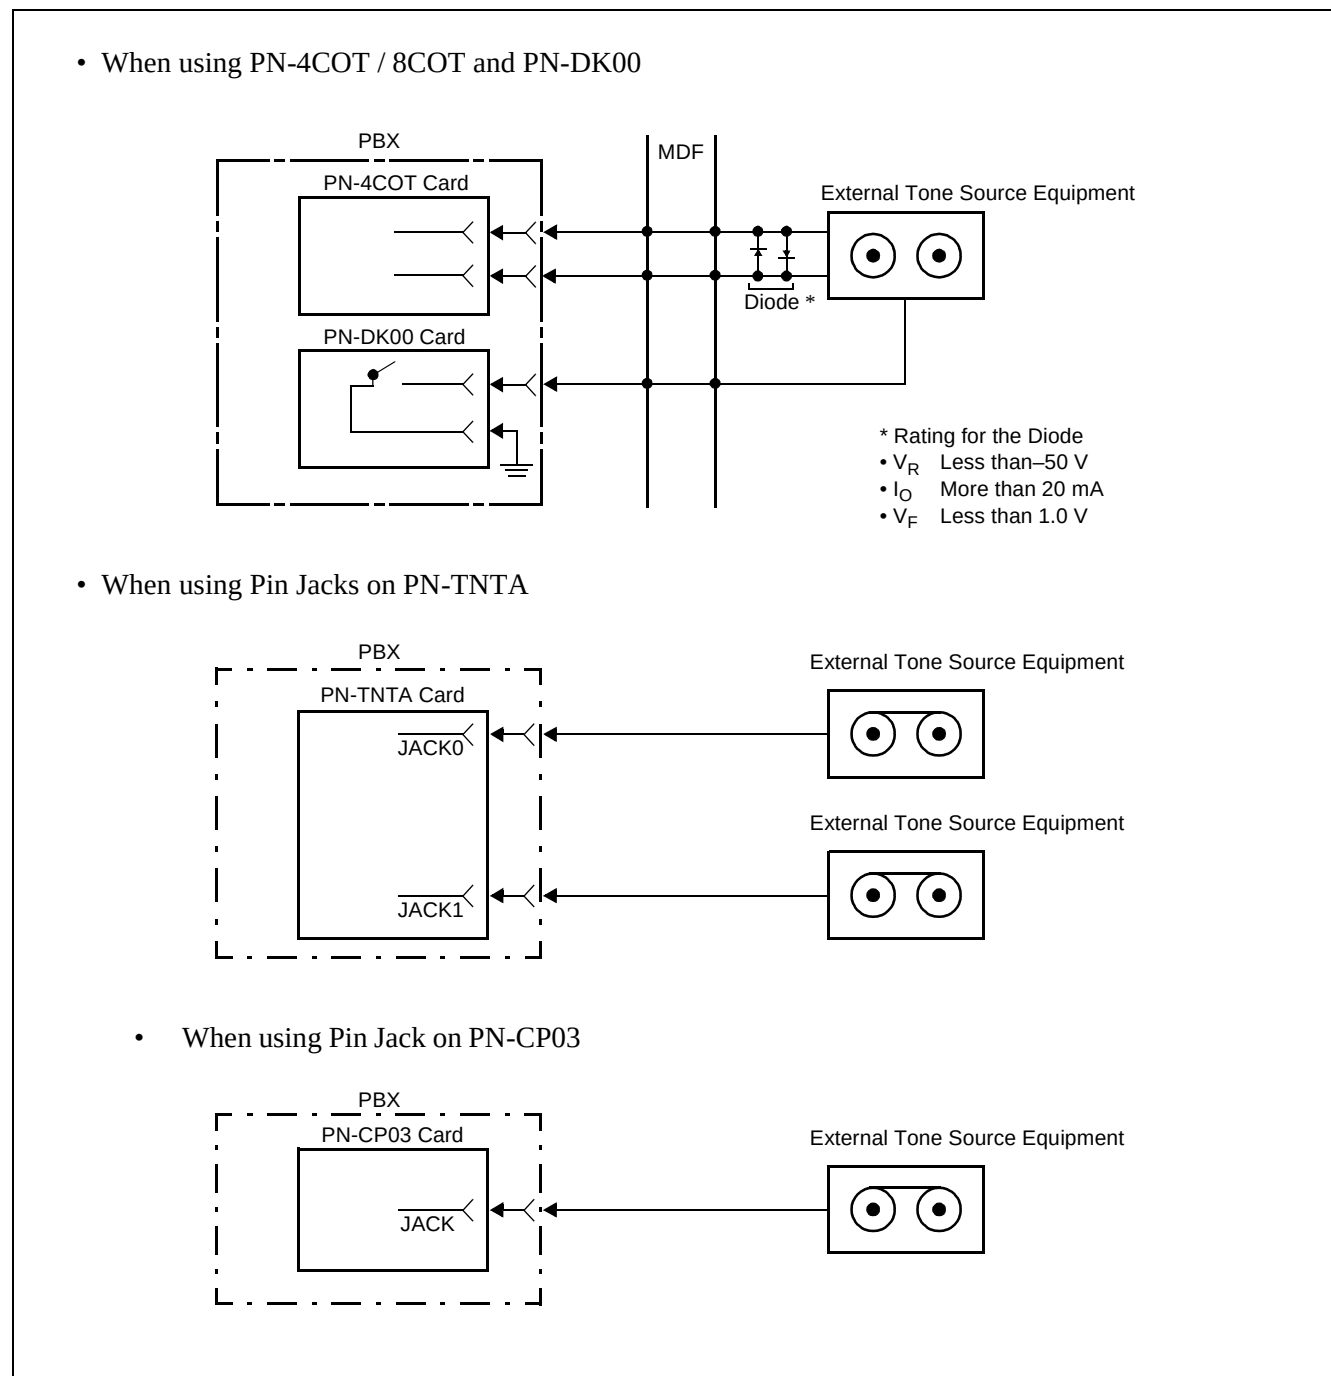


Figure 007-25 External Tone Source Connection Outline

(b) MDF Cross Connection (see [Figure 007-26](#))

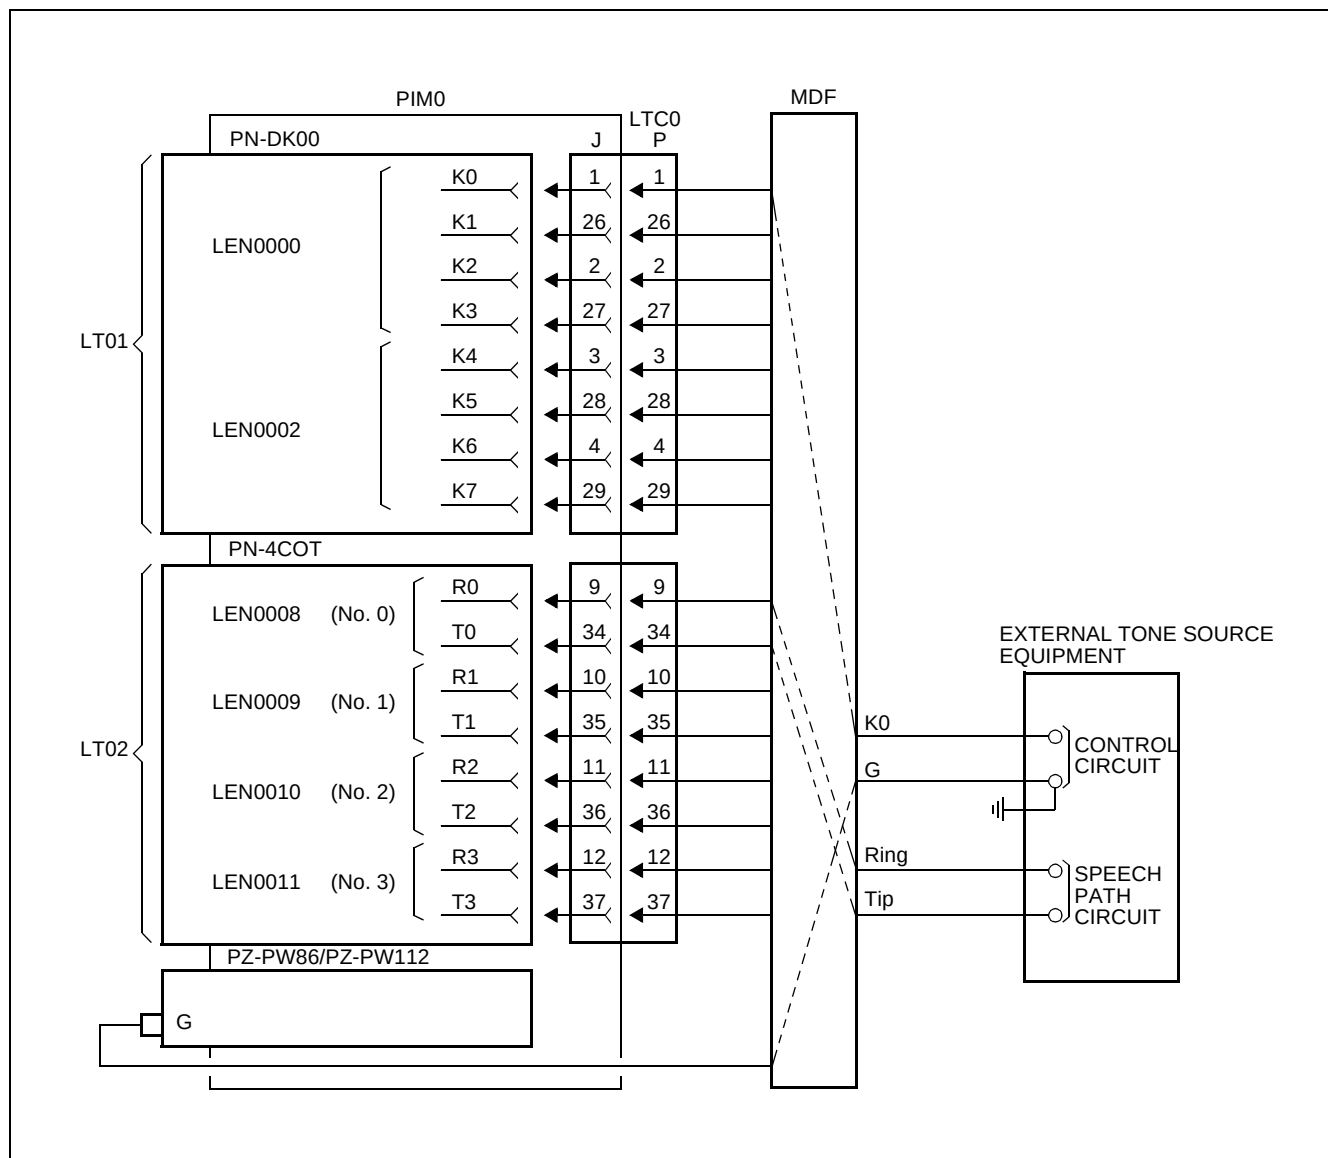


Figure 007-26 MDF Cross Connection for External Tone Source Equipment

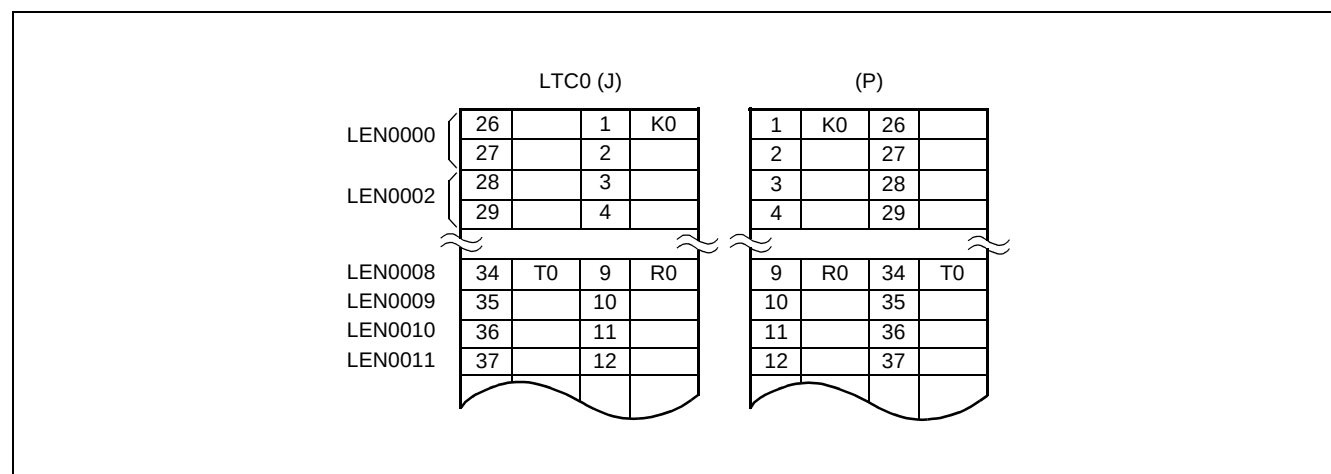


Figure 007-26 MDF Cross Connection for External Tone Source Equipment (Continued)

NAP-200-007
Sheet 37/55
Termination of Cables on MDF

- If a D.C. voltage is supplied with the tone from the external tone source equipment, a transformer or coupling capacitor should be used as shown in [Figure 007-27](#).

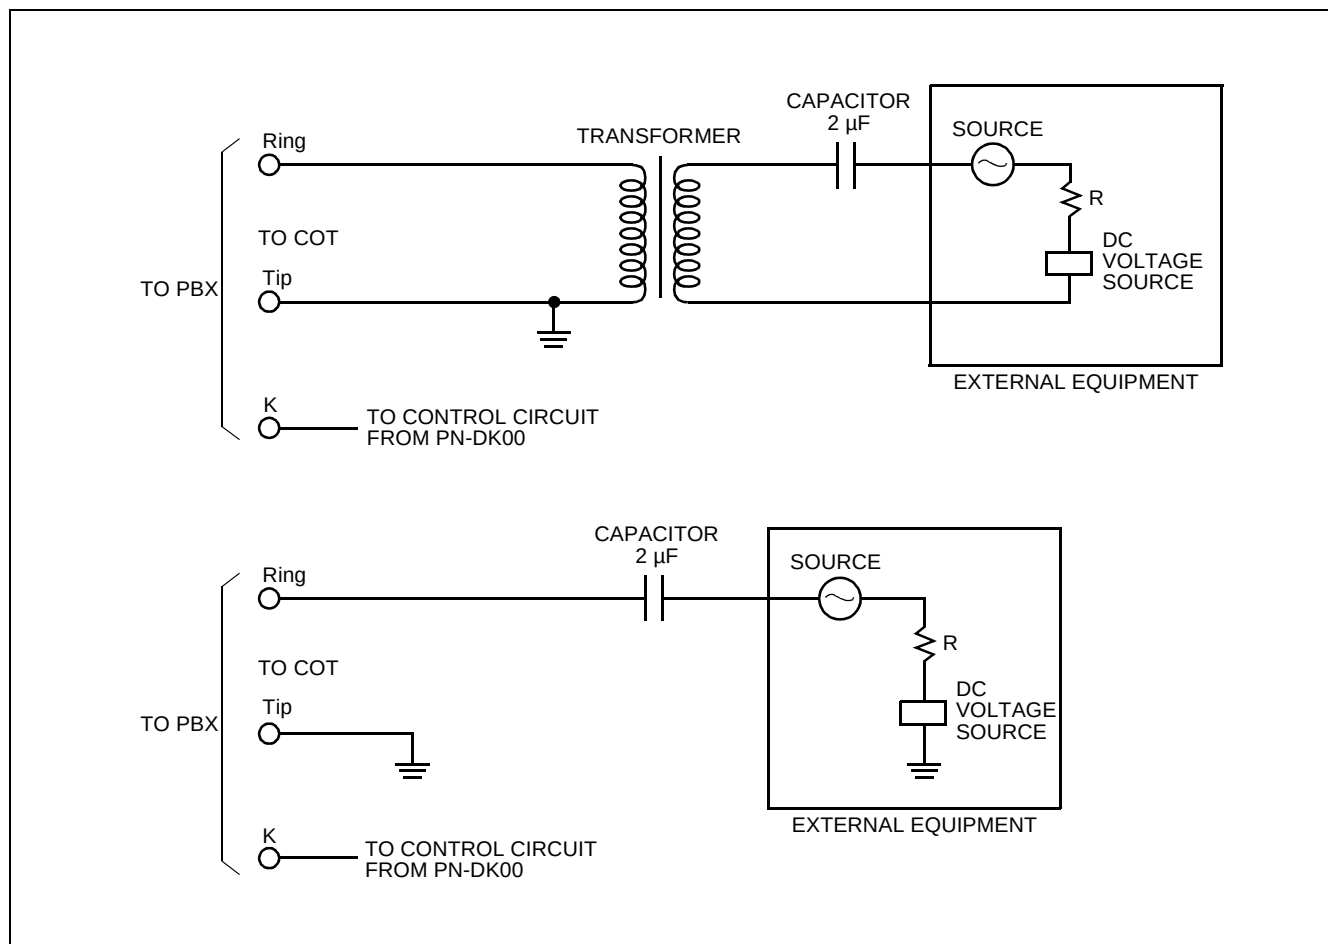


Figure 007-27 Connecting Tone Source Supplied with D.C.

NAP-200-007
Sheet 39/55
Termination of Cables on MDF

(b) When using Pin Jacks on PN-TNTA (see [Figure 007-29](#))

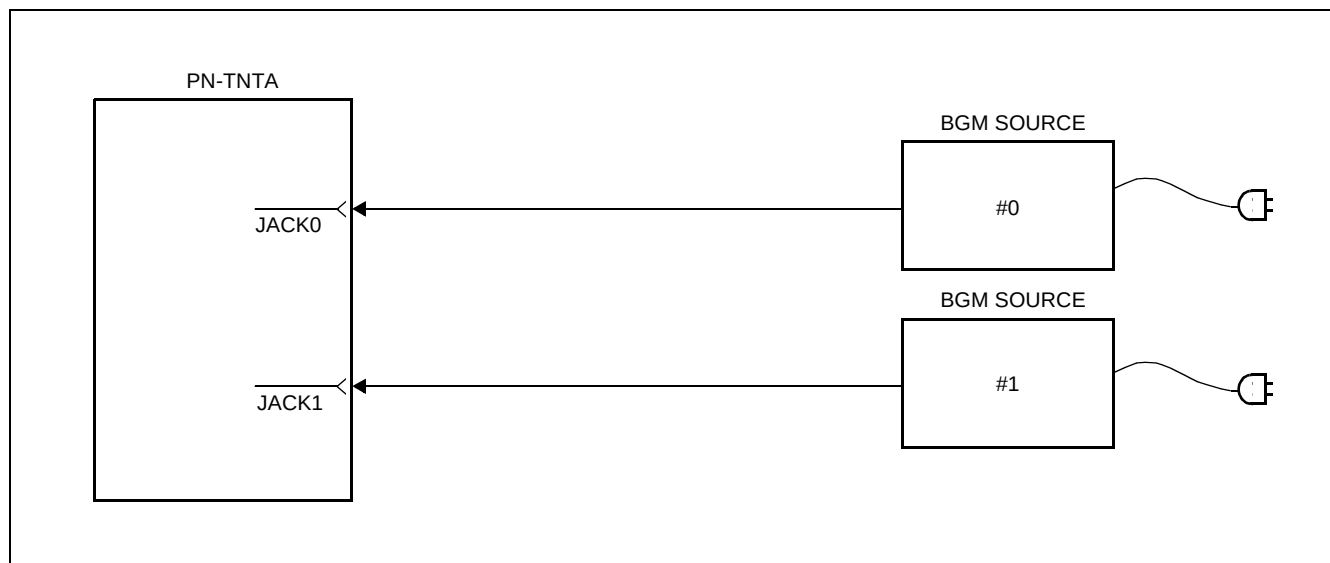


Figure 007-29 Cable Connection Between PN-TNTA and External BGM Sources

NAP-200-007
Sheet 40/55
Termination of Cables on MDF

(12) Power Failure Transfer (PFT)

The PN-AUCA card or the PZ-8PFTA card can be used as the PFT card.

(a) When using PN-AUCA card

- [Figure 007-30](#) shows an outline of a PFT (PN-AUCA) connection.
- [Figure 007-31](#) shows the MDF cross connection for a PFT (PN-AUCA).

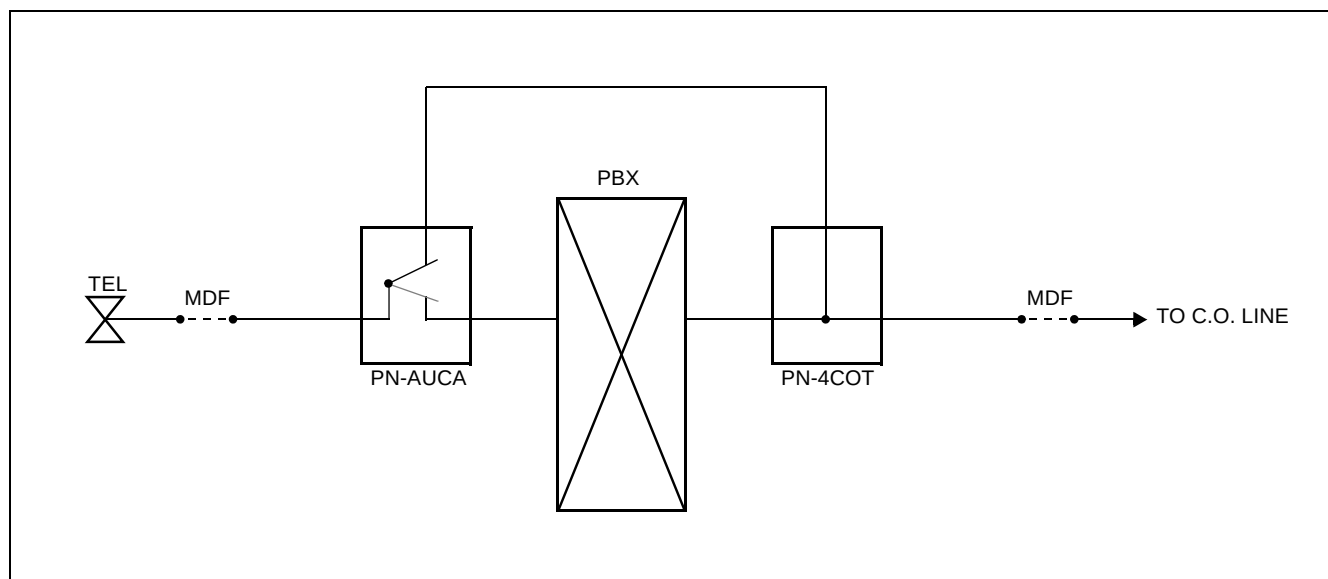


Figure 007-30 PFT Connection Outline

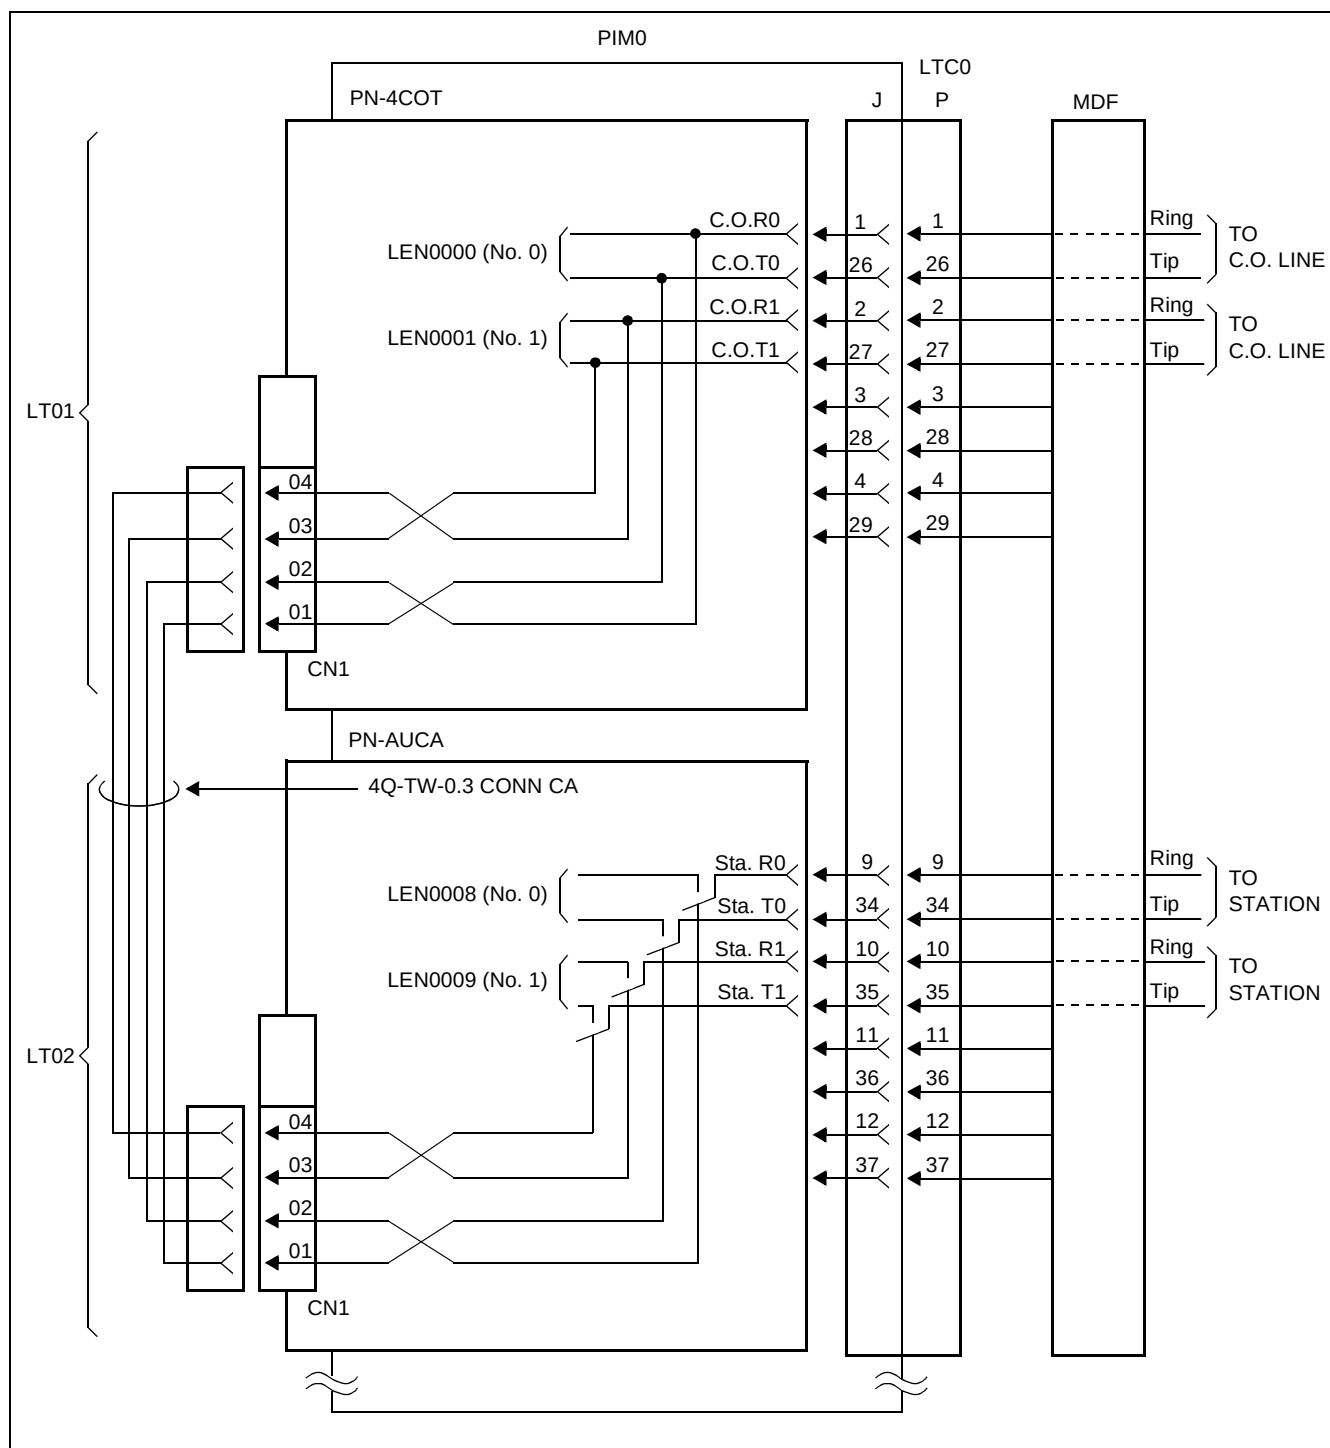


Figure 007-31 MDF Cross Connection for PFT (PN-AUCA)

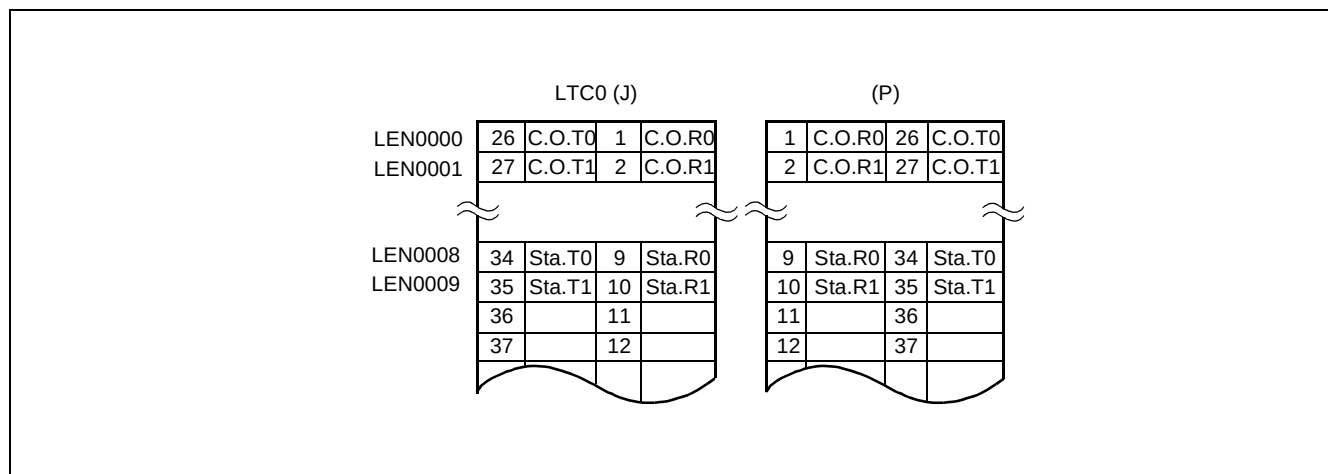


Figure 007-31 MDF Cross Connection for PFT (PN-AUCA) (Continued)

Note 1: The No. 2 and No. 3 circuit in the PN-4COT card can not be used with the PFT function.

Note 2: When using Ground Start trunks with the PFT function, the single line stations must have a ground sending button and a ground lead must be run to the station.

NAP-200-007
Sheet 43/55
Termination of Cables on MDF

(b) When using PZ-8PFTA card

- [Figure 007-32](#) shows an outline of a PFT (PZ-8PFTA) connection.

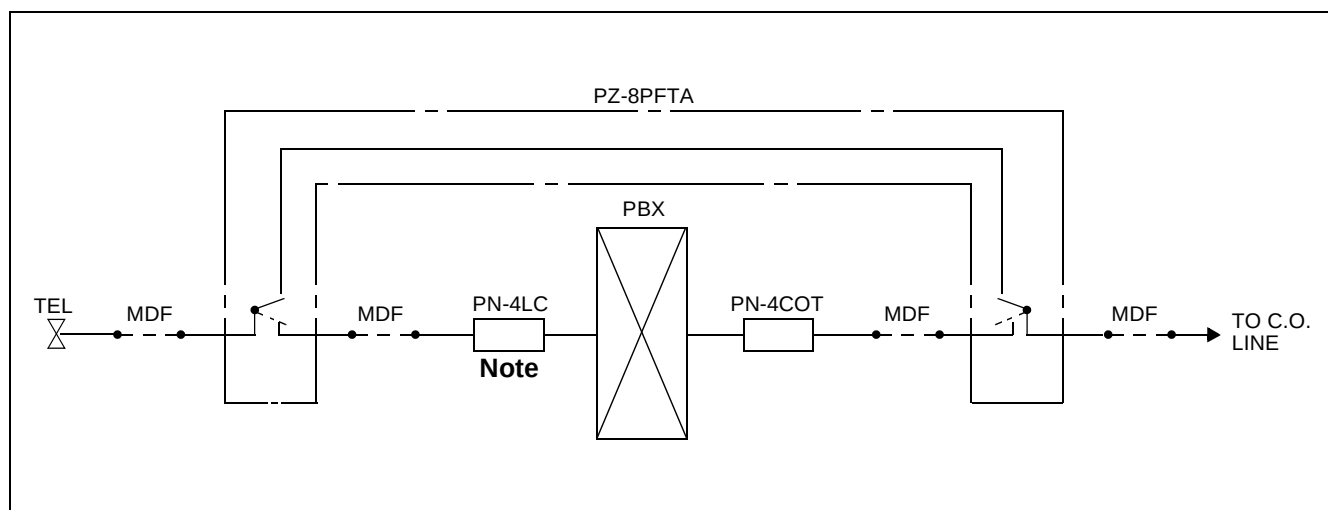


Figure 007-32 PFT (PZ-8PFTA) Connection Outline

Note: Using the PN-AUCA card (long line card) instead of the PN-4LC card is not recommended due to the variations from Central Office to the PBX; line quality cannot be assured.

NAP-200-007
Sheet 44/55
Termination of Cables on MDF

STEP 1: Mount the PFT bracket to the PIM as indicated in [Figure 007-33](#). Then, insert the PZ-8PFTA card into the mounting bracket and secure it the screws provided.

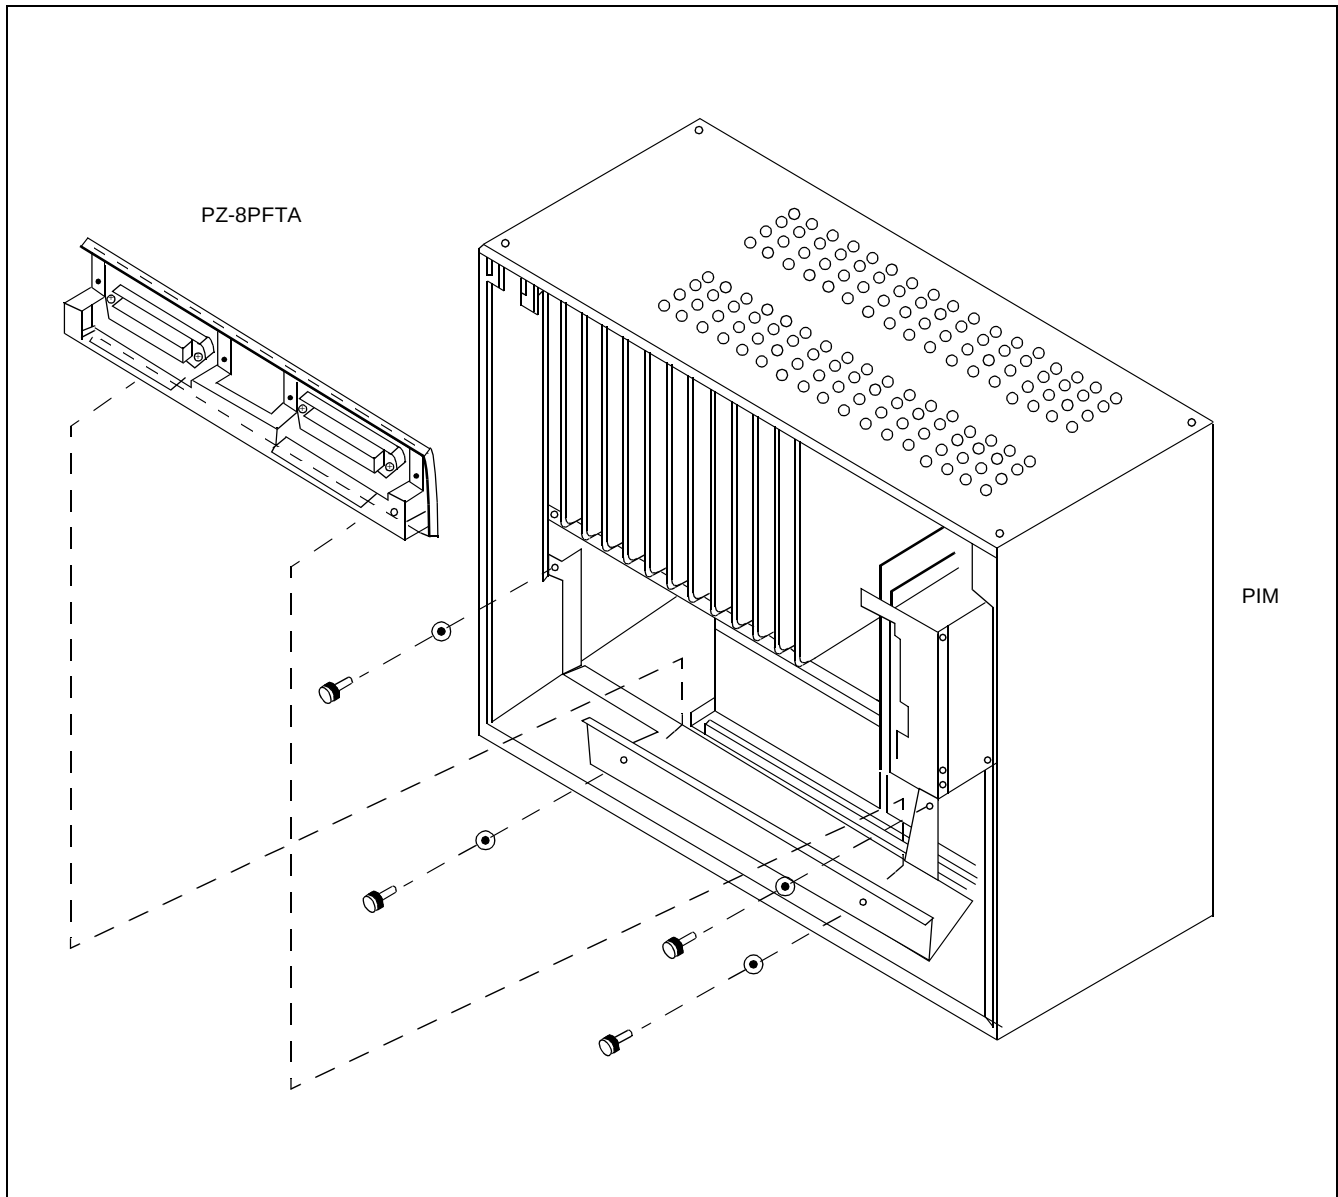


Figure 007-33 Mounting PZ-8PFTA Card to PIM

NAP-200-007
Sheet 45/55
Termination of Cables on MDF

- Install the PZ-8PFTA card to the PIM according to the following steps.

STEP 2: Connect the champ connectors of 25-pair cables to the PFT0 and PFT1 connectors on the PZ-8PFTA card as shown in [Figure 007-34](#). Then, secure them to each other using screws and tie wraps.

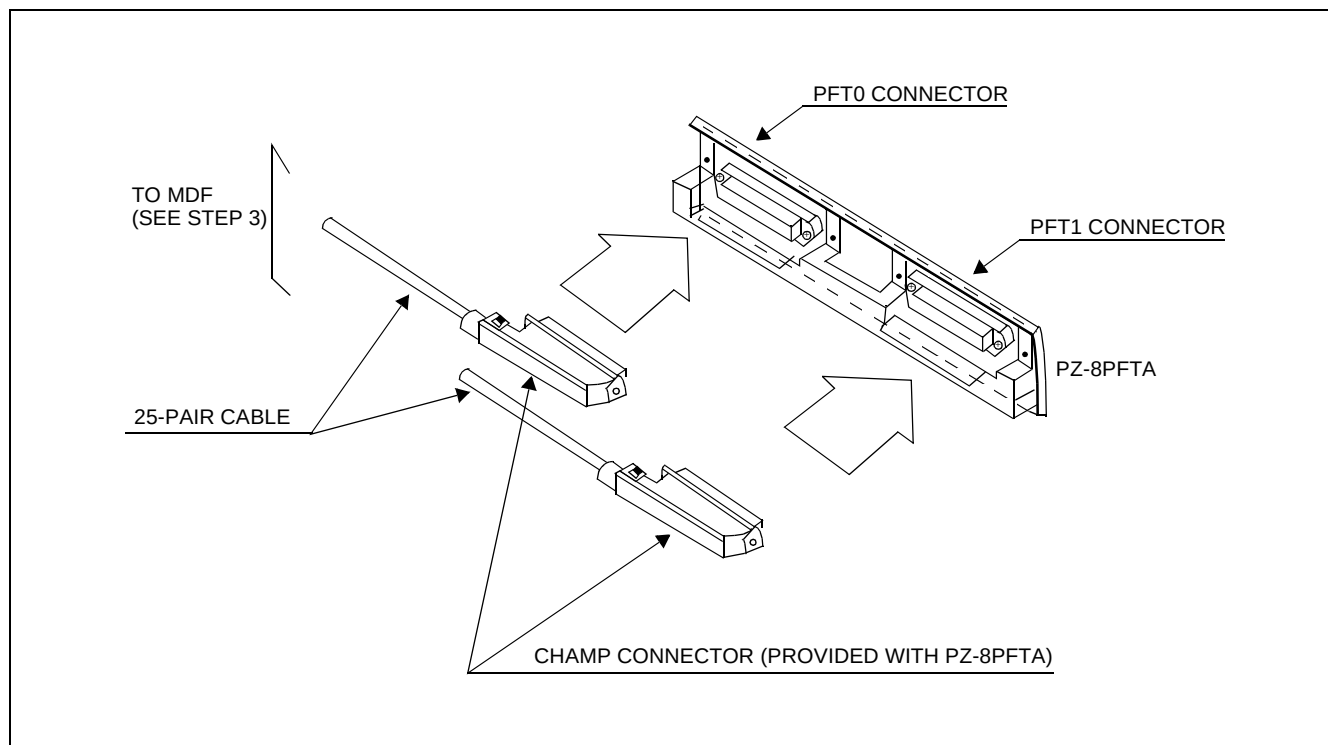


Figure 007-34 Connection of 25-Pair Cable and PZ-8PFTA

STEP 3: Connect the 25-pair cables on the MDF referring [Figure 006-34](#) and [Figure 006-35](#).

- [Figure 007-35](#) shows the PFT connector pin assignment for each PFT circuit number (No. 0 - No. 7).

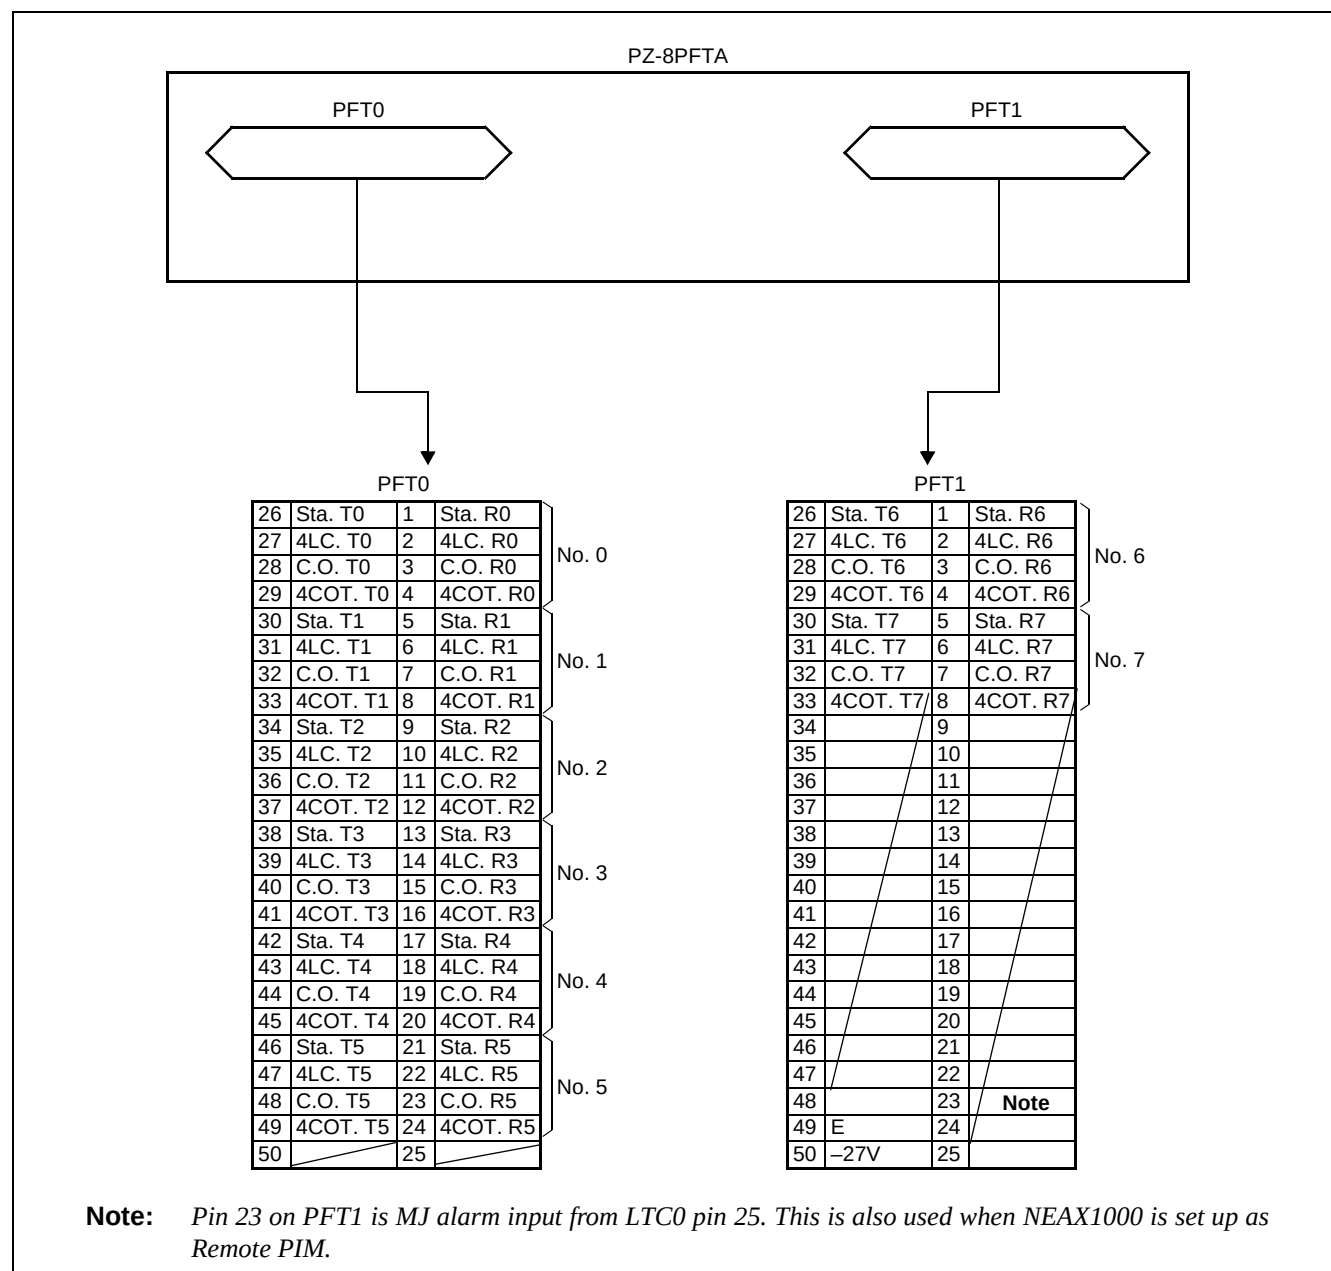


Figure 007-35 PFT Connector Pin Assignment

- Figure 007-36 shows the MDF cross connection for the No. 0 circuit on the PFT (PZ-8PFTA), as an example.



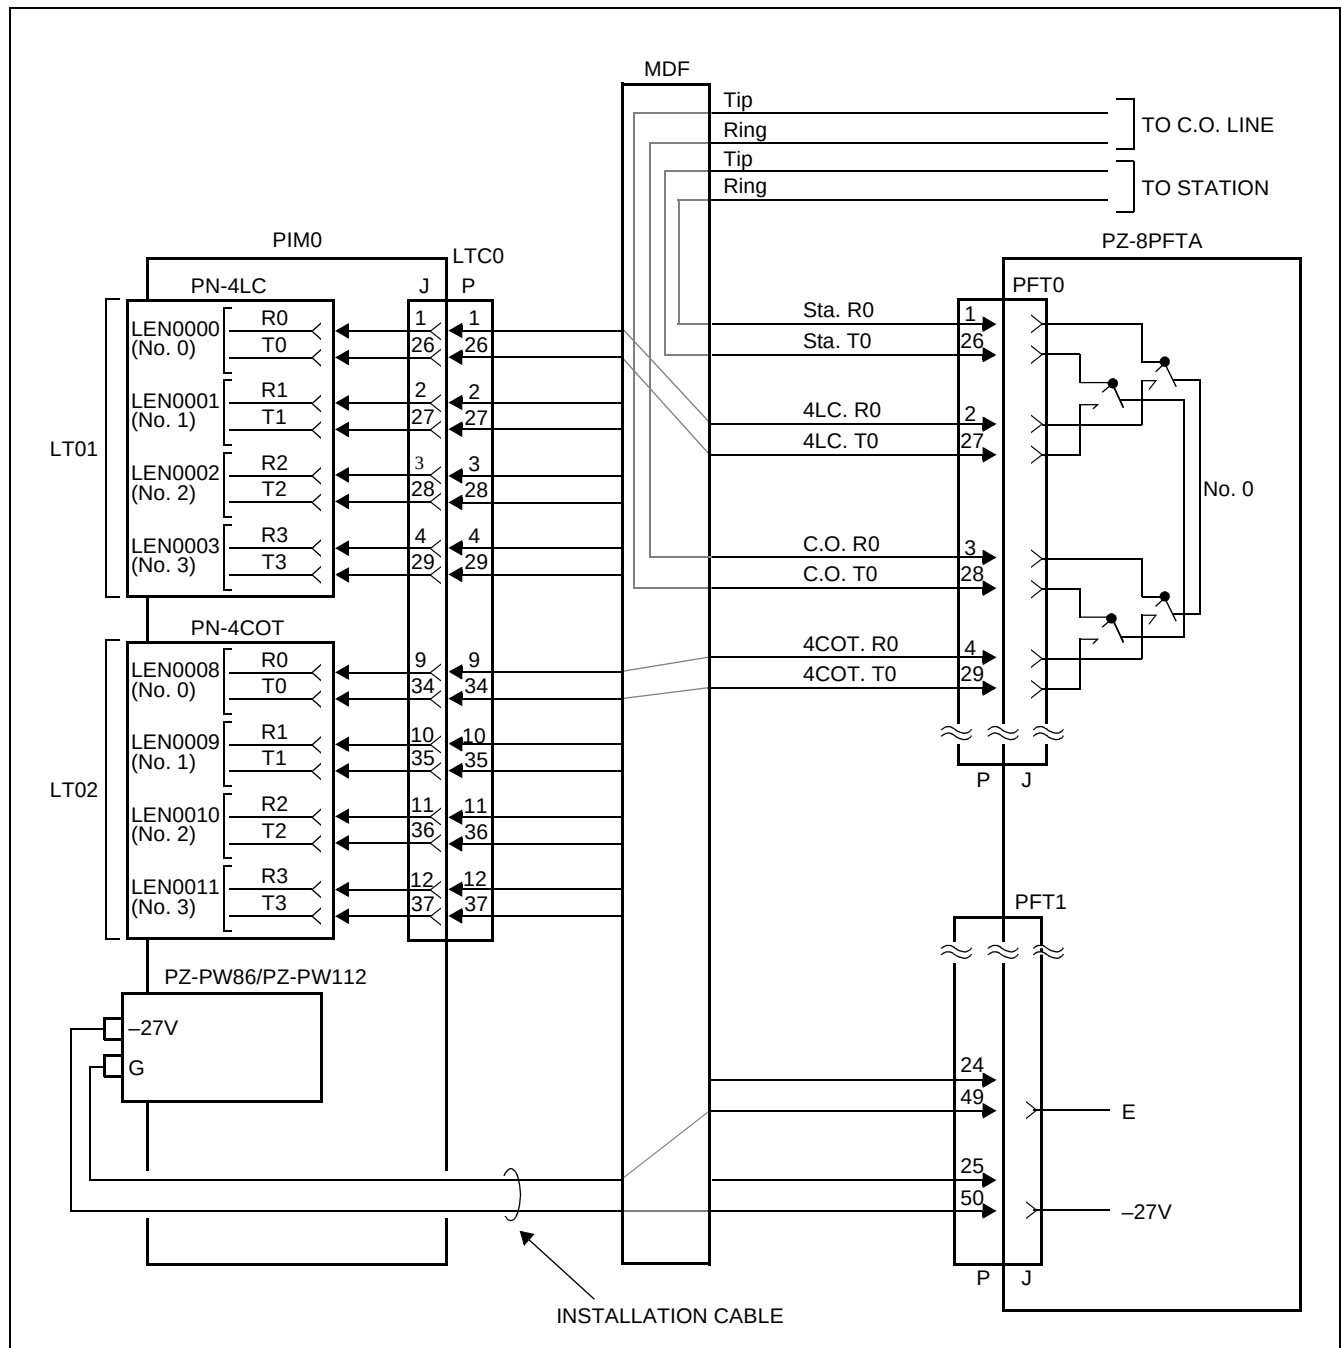


Figure 007-36 MDF Cross Connection for PFT (PZ-8PFTA)

① PFT0 CONNECTOR

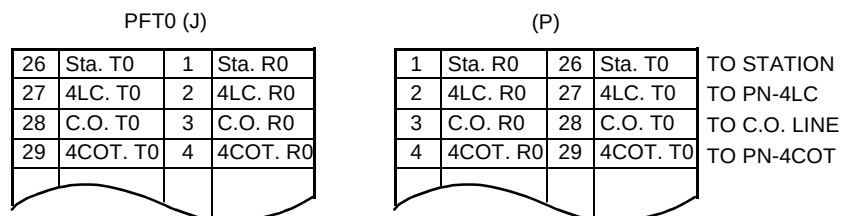

② PFT1 CONNECTOR

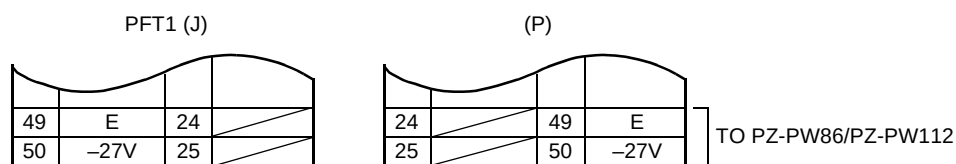

③ LTC0 CONNECTOR

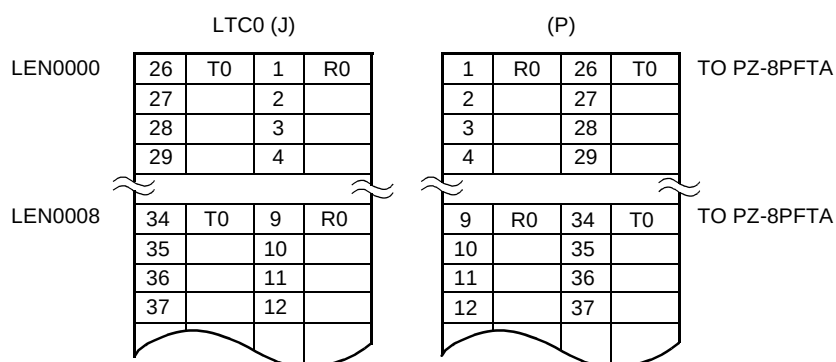


Figure 007-36 MDF Cross Connection for PFT (PZ-8PFTA) (Continued)

(13) Alarm Display Panel

Figure 007-37 shows the cross connection for an Alarm Display Panel.

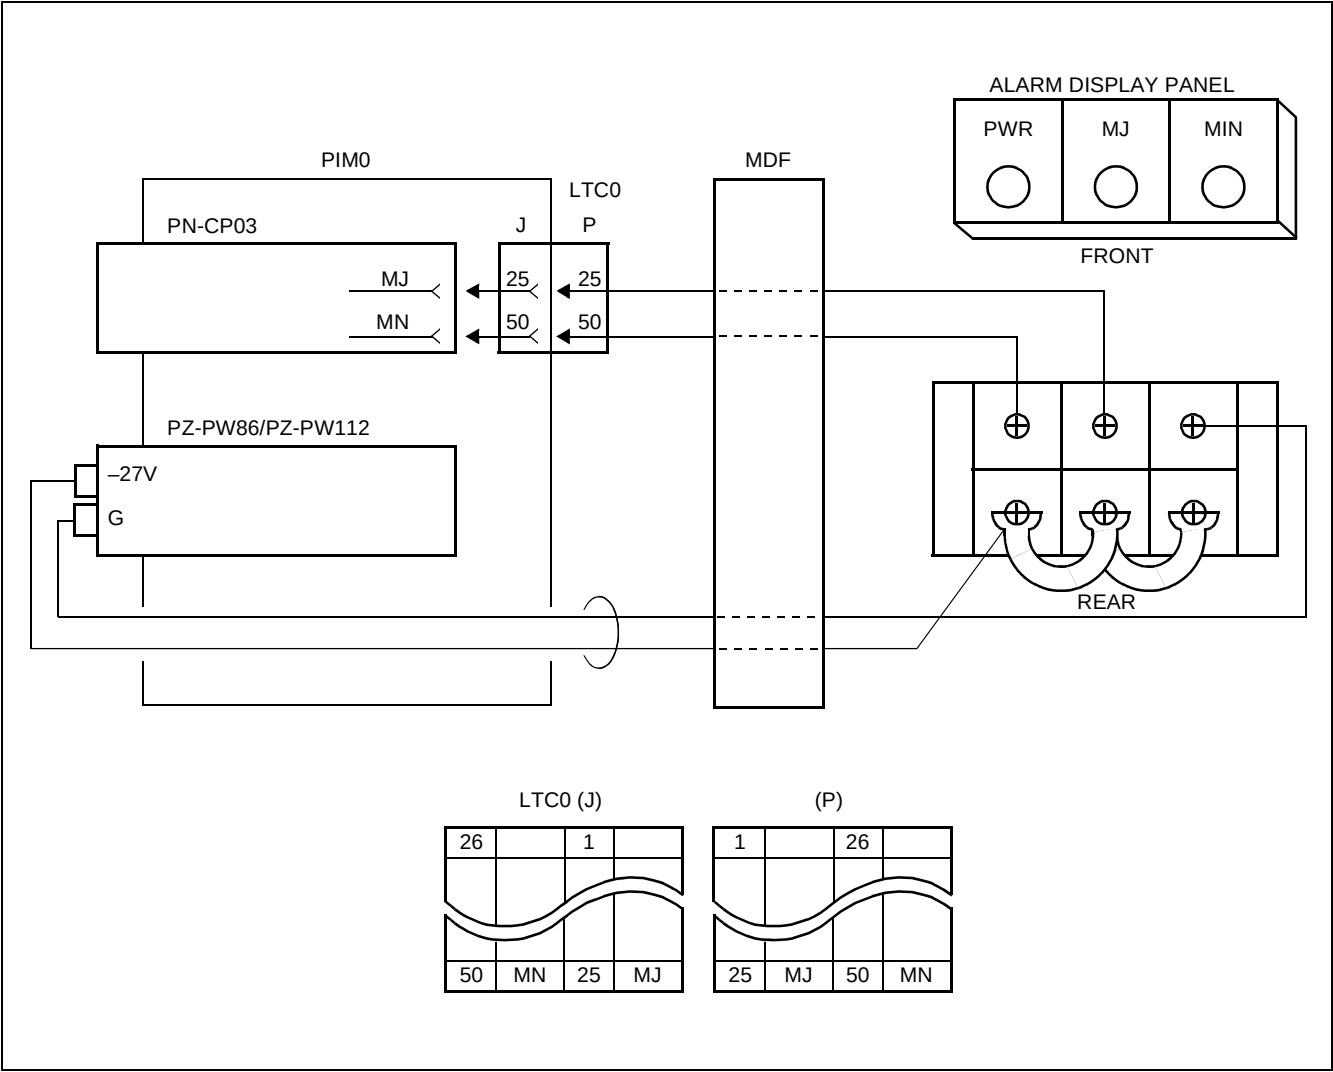


Figure 007-37 MDF Cross Connection for Alarm Display Panel

NAP-200-007
Sheet 50/55
Termination of Cables on MDF

(14) SN716 DESKCON

(a) Installation of SN716 DESKCON (see [Figure 007-38](#))

STEP 1: Unpack and assemble SN716 DESKCON.

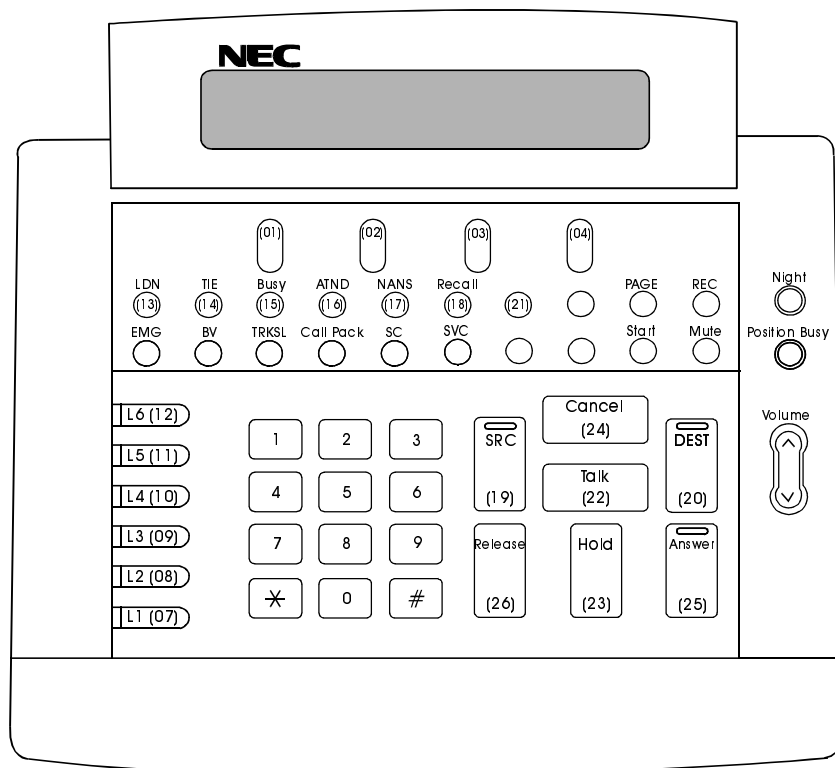


Figure 007-38 Assembly of SN716 DESKCON

NAP-200-007
Sheet 51/55
Termination of Cables on MDF

STEP 2: Plug the line cord from the modular jack into the modular jack located on the bottom of the DESKCON, labeled “Line”. This interface is a 6 conductor (3 pair), modular jack. The inner 1 pair is for signal and the outer 2 pairs are for power supply (when connected via PN-PW00). See [Figure 007-39](#).

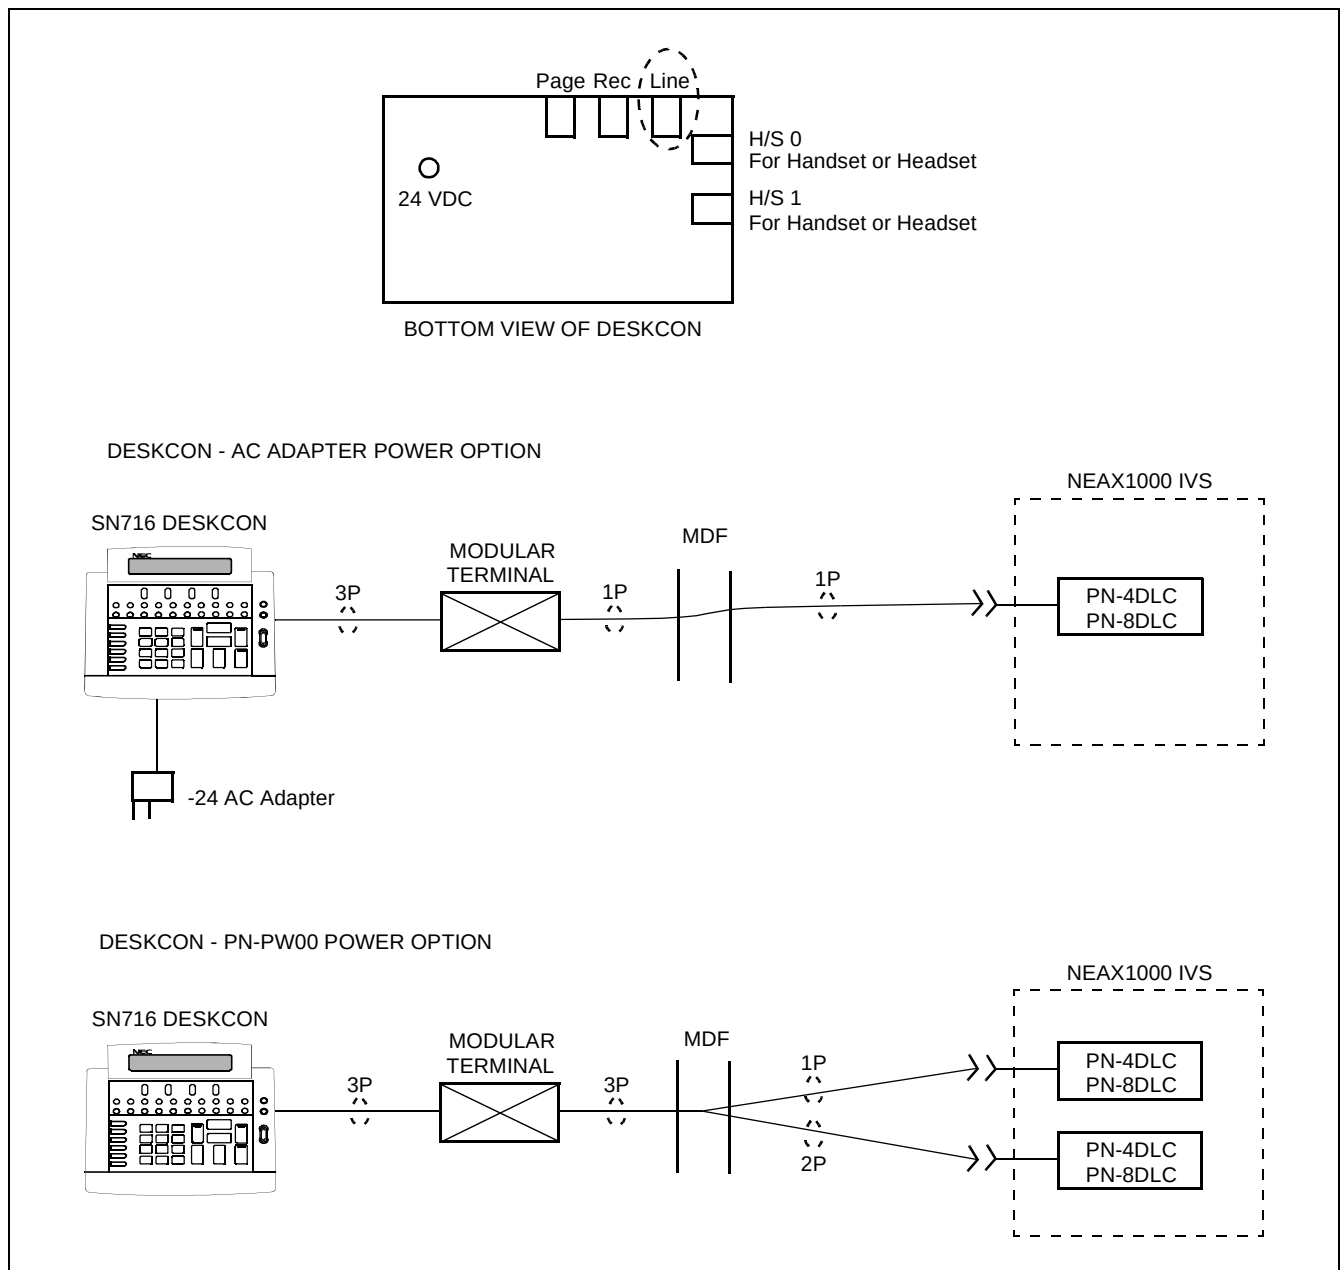


Figure 007-39 SN716 DESKCON Cable Connection

NAP-200-007
Sheet 52/55
Termination of Cables on MDF

(b) MDF Cross Connection with AC Adapter Power Option (see [Figure 007-40](#))

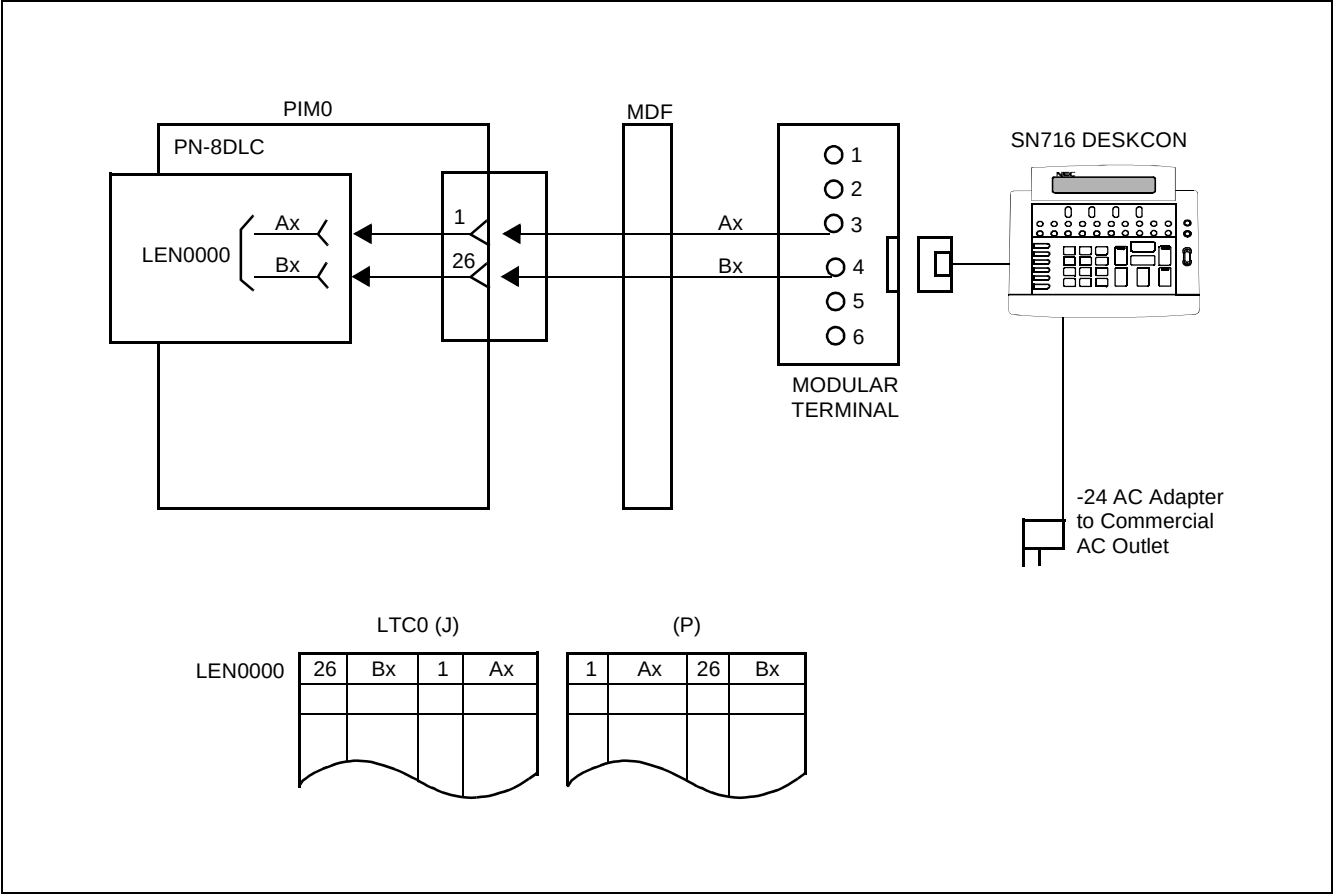


Figure 007-40 MDF Cross Connection with AC Adapter Power Option

(c) MDF Cross Connection via PN-PW00 Power Option (see [Figure 007-41](#))

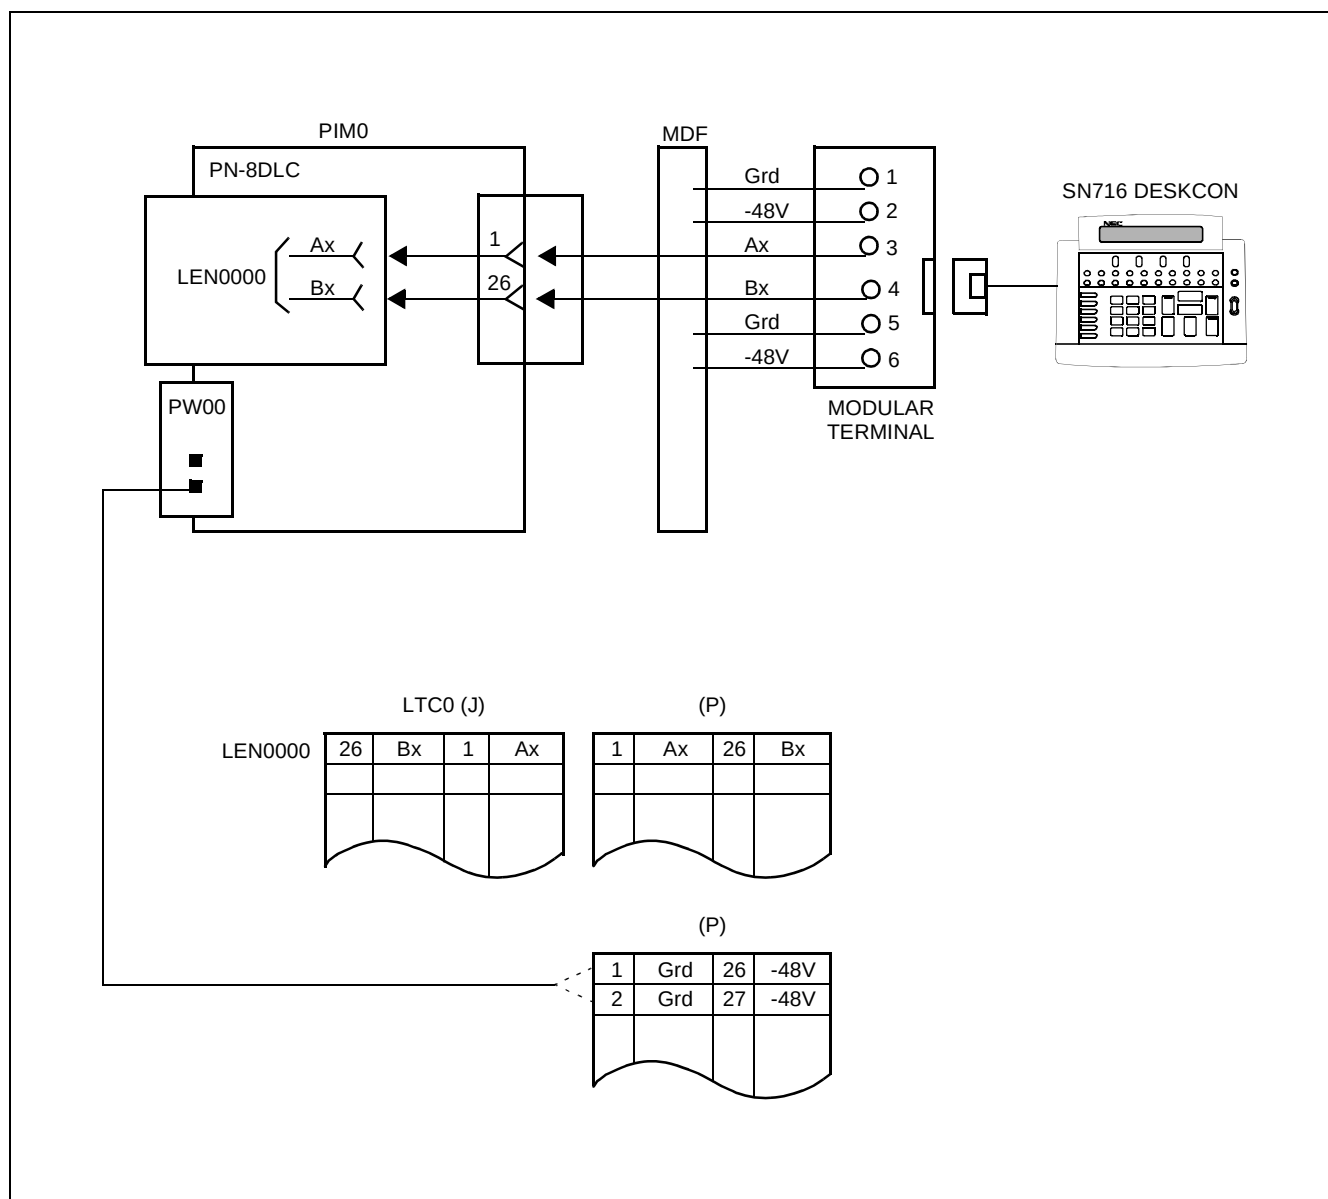


Figure 007-41 MDF Cross Connection via PN-PW00 Power Option

NAP-200-007
Sheet 54/55
Termination of Cables on MDF

(15) Single Line Device Interface - Recommended Method

The NEAX1000 does not provide Ring Generator Voltage or Message Waiting light supply. An external Ring Generator may be installed, but there is no connector for interfacing a Message Waiting power supply. It is therefore recommended that single line devices be interfaced to the system via Analog Port Adapters with Ring, which are operating in Dual Port Mode. See [Figure 007-42](#). When provided with optional external Ring Generator, ensure that connection to output terminals of Ring Generator are in accordance with National Electrical Code. Ring Generator shall be a UL-listed type.

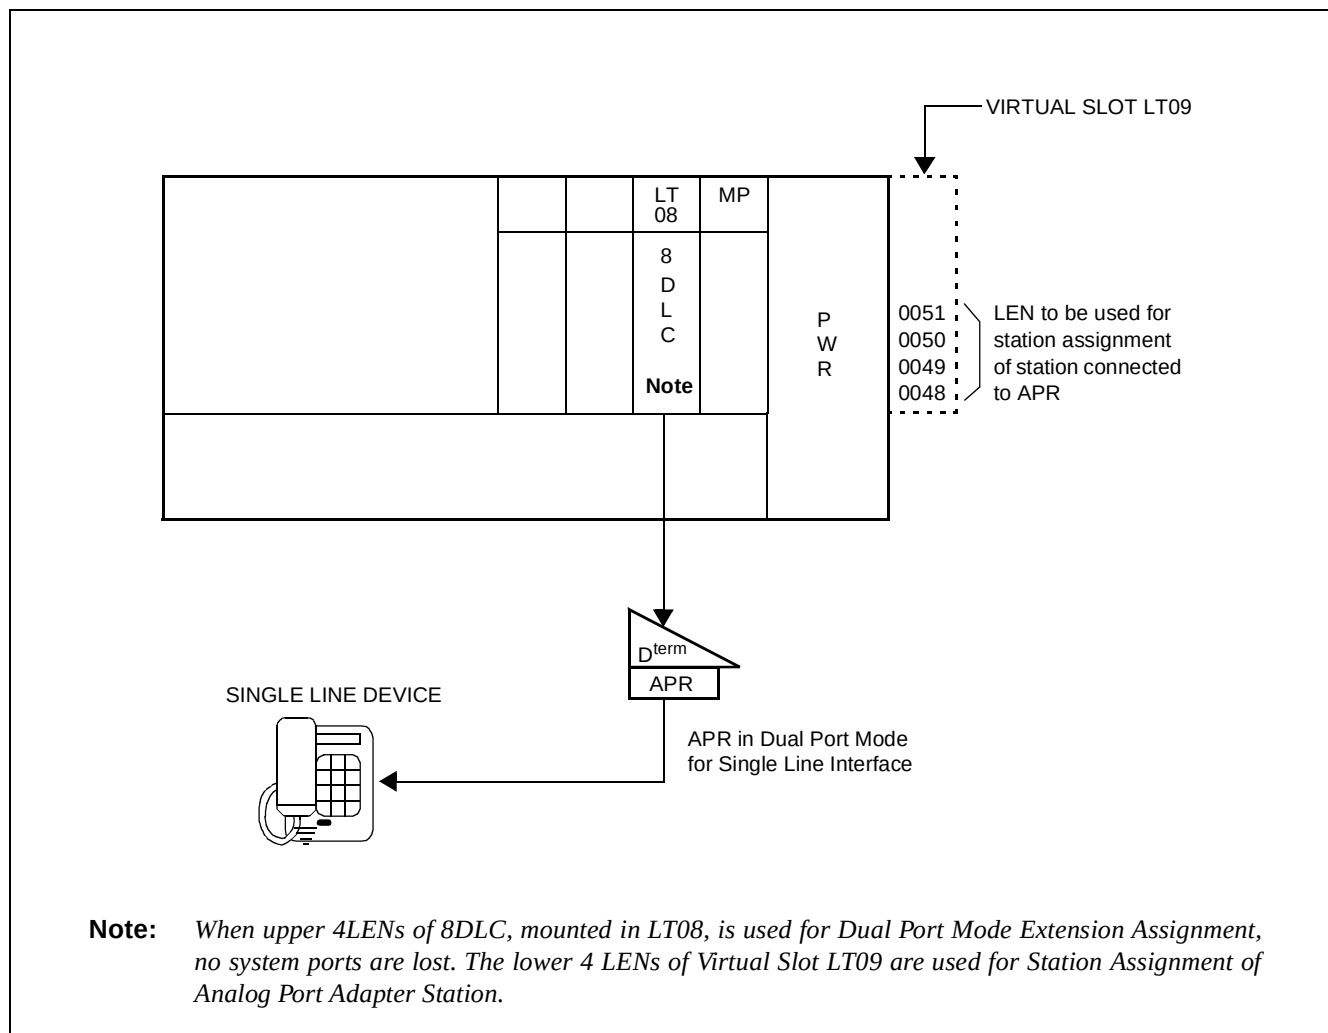


Figure 007-42 Single Line Device Interface

(16) Message Center Interface Connection for VM00 to AP00 (see [Figure 007-43](#))

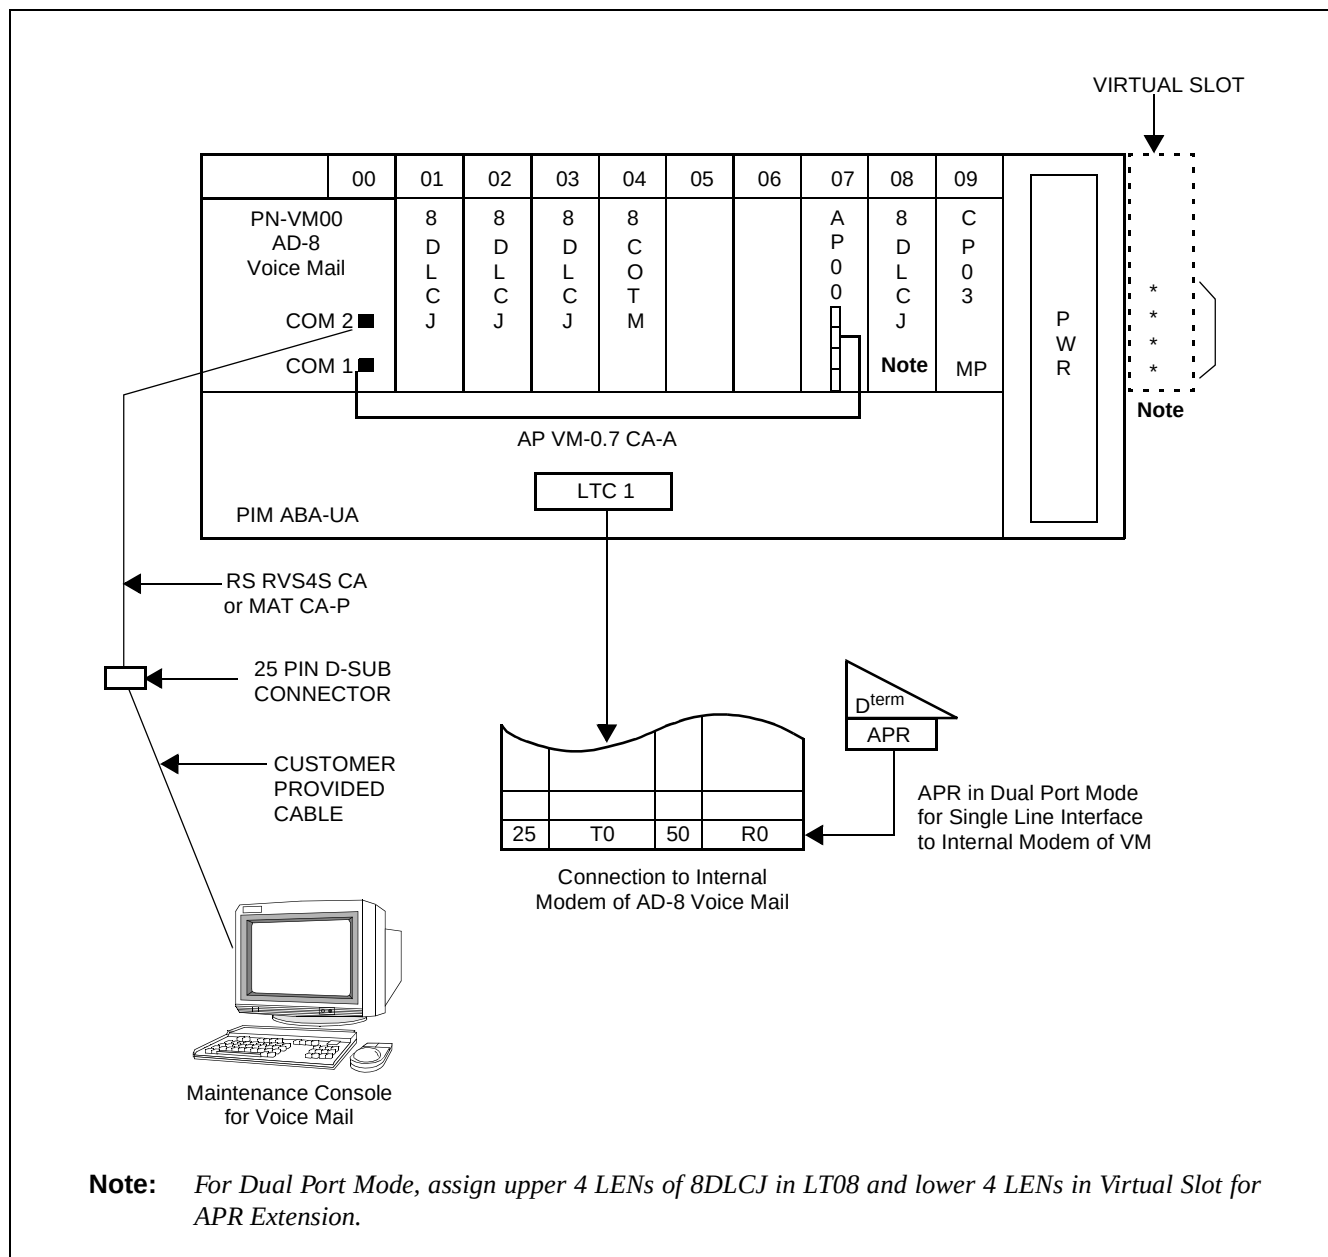


Figure 007-43 Message Center Interface Connection for VM00 to AP00

NAP-200-008
Sheet 1/10
Switch Setting of Circuit Card

1. CIRCUIT CARDS SWITCH SETTING

Table 008-1 shows the control circuit cards and Table 008-2 shows the line/trunk circuit cards. This NAP provides information on each of these cards. As for the other circuit cards, refer to the Circuit Card Manual.

Table 008-1 Control Circuit Cards

NAME (FUNCTIONAL NAME)	EXISTENCE OF LAMPS X: PROVIDED —: NOT PROVIDED	EXISTENCE OF SWITCHES X: PROVIDED —: NOT PROVIDED	EXTRACTION/INSERTION WITH POWER ON X: ALLOWED —: NOT ALLOWED
PN-CP03 (MP)	X	X	—
PZ-PW86 (PWR)	X	X	—
PZ-PW112 (PWR)	X	X	—

Table 008-2 Line/Trunk Circuit Cards

NAME (FUNCTIONAL NAME)	EXISTENCE OF LAMPS X: PROVIDED —: NOT PROVIDED	EXISTENCE OF SWITCHES X: PROVIDED —: NOT PROVIDED	EXTRACTION/INSERTION WITH POWER ON X: ALLOWED —: NOT ALLOWED
PN-8DLC (DLC)	X	—	X
PN-8COT (COT)	X	—	X

NAP-200-008
Sheet 2/10
Switch Setting of Circuit Card

2. PN-CP03 (MP)

- (1) Locations of Lamps, Switches, and Connectors (see [Figure 008-1](#))

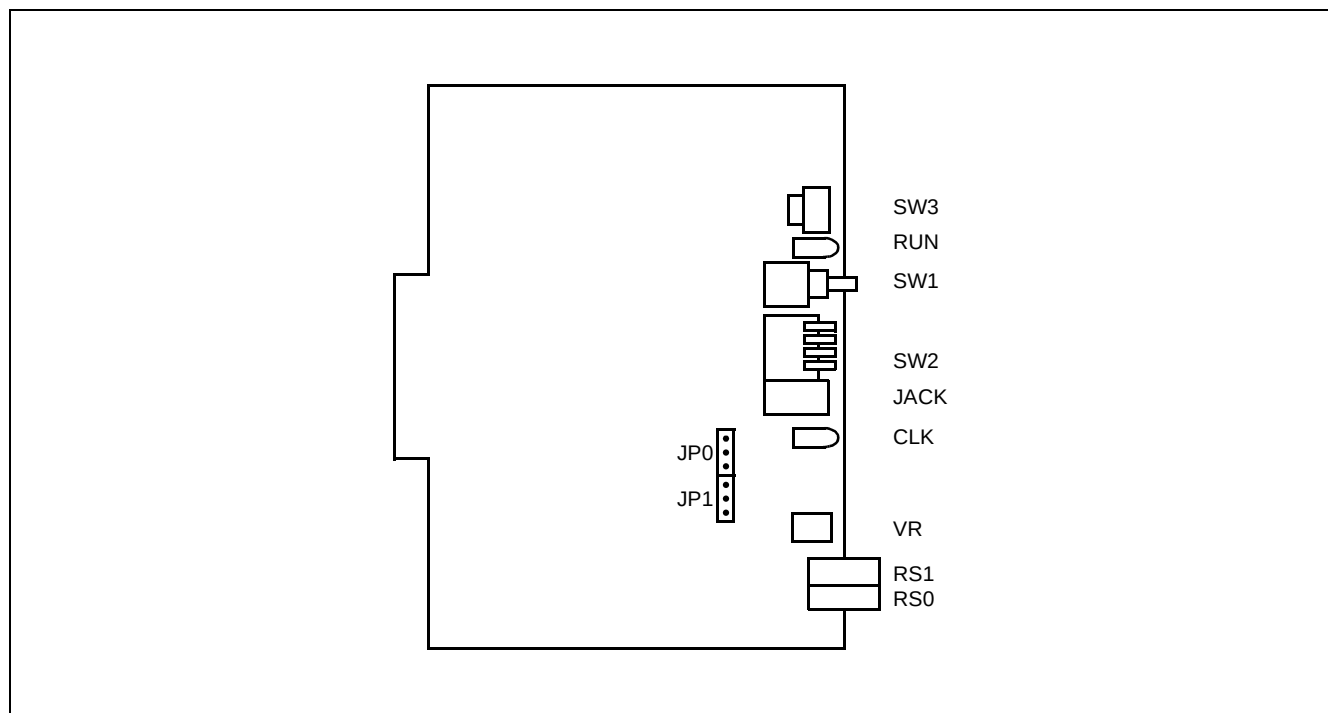


Figure 008-1 PN-CP03 (MP) Card

- (2) Lamp Indications (see [Table 008-3](#))




Table 008-3 PN-CP03 (MP) Card Lamp Indications

LAMP NAME	COLOR	FUNCTION
RUN	Green	Flashes at 120 IPM while the circuit card is operating normally.
CLKIN	Green	Lights while receiving clock signals to the PLO oscillator.

NAP-200-008
Sheet 3/10
Switch Setting of Circuit Card





(3) Switch Setting (see [Table 008-4](#))

Table 008-4 PN-CP03 (MP) Card Switch Settings

SWITCH NAME	SWITCH NUMBER	SETTING POSITION	FUNCTION	CHECK																	
SW3 (Rotary SW) 	0 - F		On Line (Call processing is in progress)																		
		2	Off Line (Call processing is stopped) • I/O port: Depending on CM40 YY=08																		
		3	Off Line (Call processing is stopped) • I/O port: 1200bps (Fixed)																		
		B	For clearing office data																		
		C	For setting resident system program																		
		1, 4 - 9 A, D - F	Not used																		
SW1 (Push SW)			For initializing CPU																		
SW2 (Piano Key SW) 	1	ON	KF Mode																		
			MF/PF Mode																		
		2, 3	Selection of PLO (Phase Locked Oscillator) • When using internal PLO of MP card: <table border="1" data-bbox="672 1232 1305 1583"><thead><tr><th colspan="2">SWITCH NUMBER</th><th rowspan="2">FUNCTION</th></tr><tr><th>2</th><th>3</th></tr></thead><tbody><tr><td>OFF</td><td>OFF</td><td>1.5MHz clock [For PN-24DTA/PN-24DTA-A]</td></tr><tr><td>ON</td><td>OFF</td><td>192kHz clock [For PN-BRTA]</td></tr><tr><td>OFF</td><td>ON</td><td>2MHz clock [For PN-30DTC]</td></tr><tr><td>ON</td><td>ON</td><td>Not used</td></tr></tbody></table>		SWITCH NUMBER		FUNCTION	2	3	OFF	OFF	1.5MHz clock [For PN-24DTA/PN-24DTA-A]	ON	OFF	192kHz clock [For PN-BRTA]	OFF	ON	2MHz clock [For PN-30DTC]	ON	ON	Not used
SWITCH NUMBER		FUNCTION																			
2	3																				
OFF	OFF	1.5MHz clock [For PN-24DTA/PN-24DTA-A]																			
ON	OFF	192kHz clock [For PN-BRTA]																			
OFF	ON	2MHz clock [For PN-30DTC]																			
ON	ON	Not used																			

NAP-200-008
Sheet 4/10
Switch Setting of Circuit Card

Table 008-4 PN-CP03 (MP) Card Switch Settings (Continued)

SWITCH NAME	SWITCH NUMBER	SETTING POSITION	FUNCTION	CHECK
SW2 (Piano Key SW) 	2, 3	• When using the PLO card (PN-CK00): <u>SW2-2</u> OFF <u>SW2-3</u> ON • When not using the internal PLO and the PLO card: <u>SW2-2</u> OFF <u>SW2-3</u> OFF		
		ON	When using RS1 port for built-in MODEM.	
	4	OFF	When using RS1 port for RS-232C.	
VR (Rotary SW) 			Variable Resistor for External Hold Tone Source (0 - 20 KΩ: Clockwise)	
JP0 (Jumper pin) 		UP	For normal operation Note: Do not remove this jumper. The power to RAM will be removed causing loss of Office Data Programming.	
		DOWN	Not used	
JP1 (Jumper pin) 		UP	For normal operation Note: Do not relocate this jumper when power is turned on.	
		DOWN	For using External Tone Source	

The figure in the SWITCH NAME column and the position in  in the SETTING POSITION column indicate the standard setting of the switch. When the switch is not set as shown by the figure and , the setting of the switch varies with the system concerned.

Note: Set the groove on the switch knob to the desired switch position.

NAP-200-008
Sheet 5/10
Switch Setting of Circuit Card



CAUTION: When the operating power is being supplied to this circuit card, do not plug/unplug this circuit card into/from its mounting slot.

3. PZ-PW86 (PWR)

(1) Locations of Lamps, Switches, and Connectors (see [Figure 008-2](#))

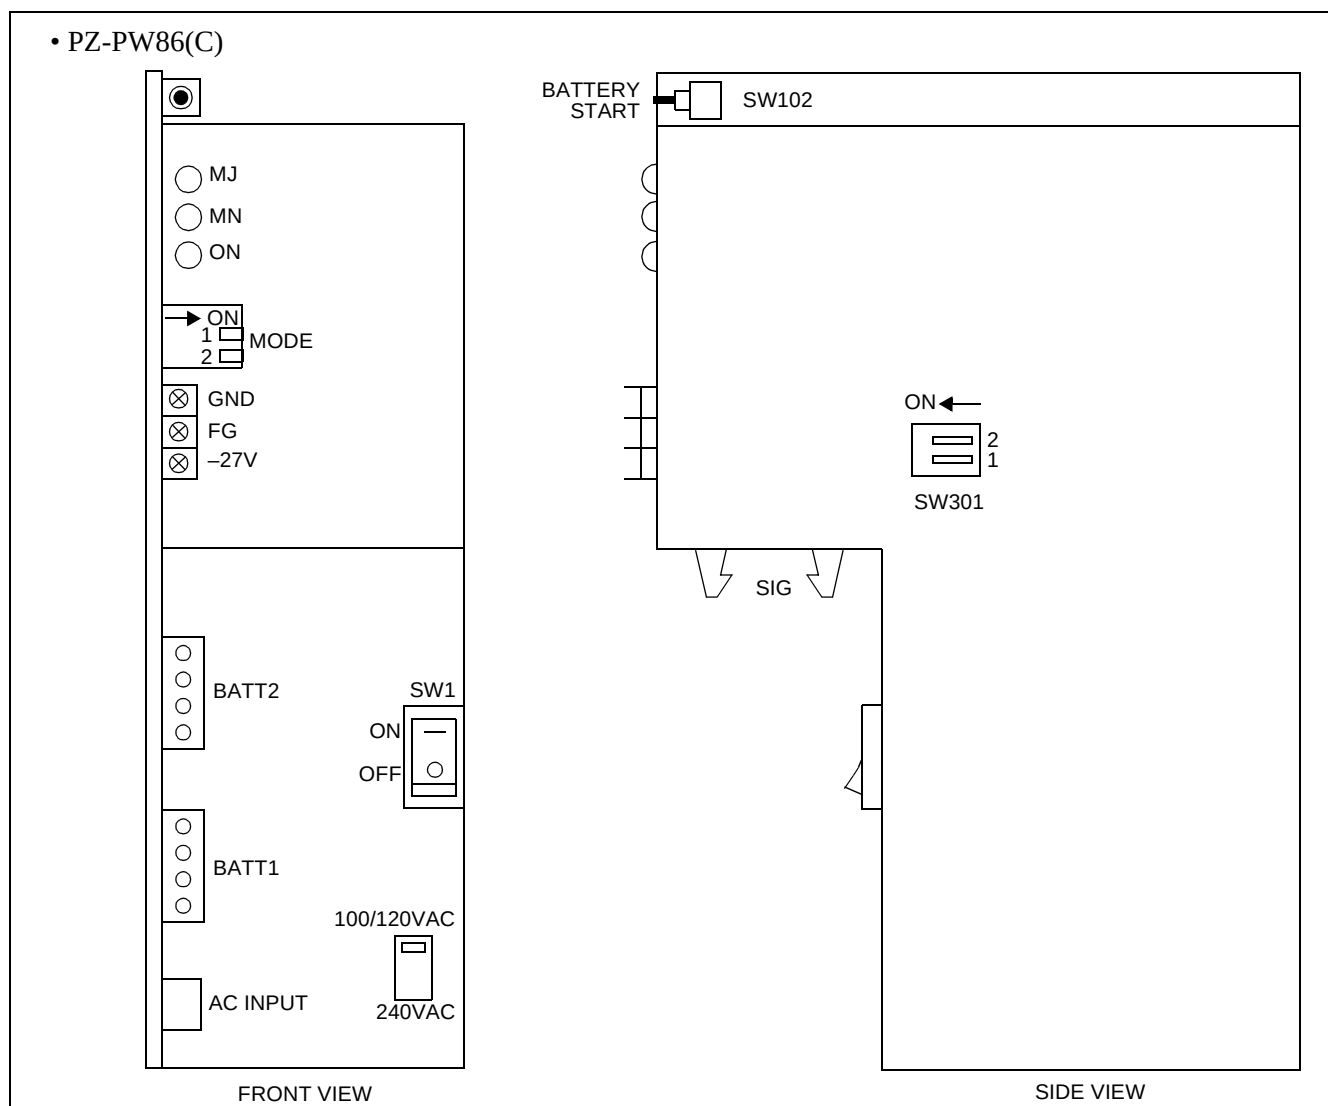


Figure 008-2 PZ-PW86 (PWR) Card

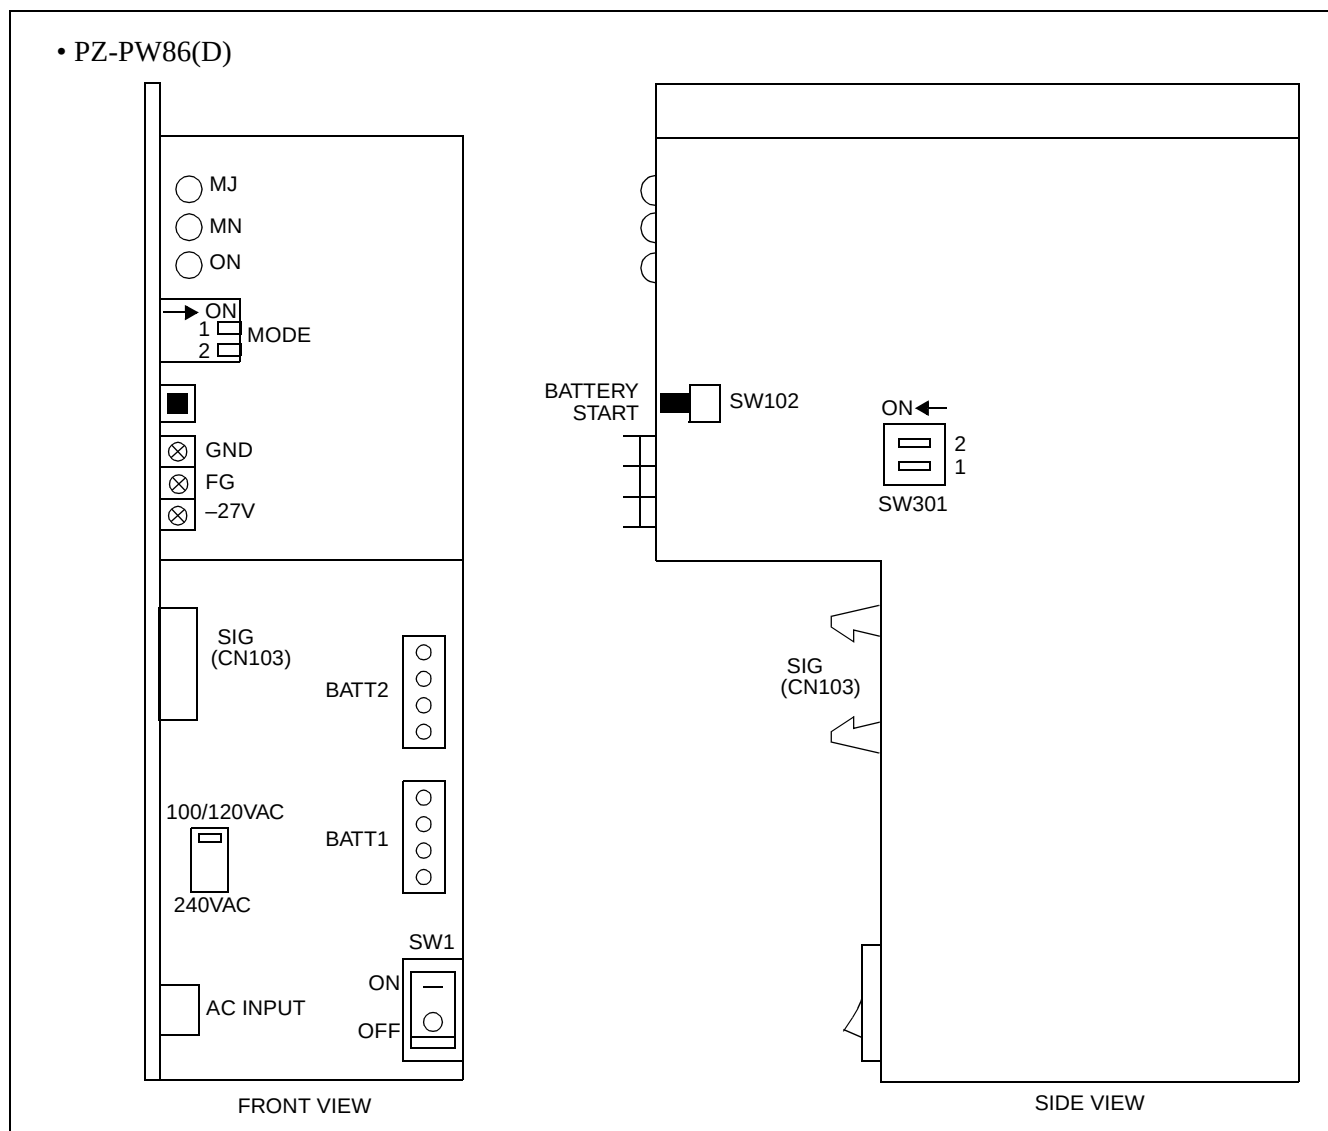


Figure 008-2 PZ-PW86 (PWR) Card (Continued)

(2) Lamp Indications (see [Table 008-5](#))






Table 008-5 PZ-PW86 (PWR) Card Lamp Indications

LAMP NAME	COLOR	FUNCTION
MJ	Red	Lights upon occurrence of a major fault.
MN	Yellow	Lights upon occurrence of a minor fault.
ON	Green	Remains lit while the power is on.

NAP-200-008
Sheet 7/10
Switch Setting of Circuit Card

(3) Switch Settings (see [Table 008-6](#))

Table 008-6 PZ-PW86 (PWR) Card Switch Settings

SWITCH NAME	SWITCH NUMBER	SETTING POSITION	FUNCTION	CHECK
Mode (Piano Key SW) 	1	OFF	Always set to OFF	
	2	ON	Standard setting for equalize charging (set to equalize for Gel cell or no battery).	
		OFF	Float charging, for <u>vented</u> batteries only.	
SW1 		ON	For turning AC power and the battery on	
		OFF	For turning AC power and the battery off	
SW102 BATTERY START 		PRESS MOMENTARILY	To start each PIM on battery power, when AC power is not provided (switch "SW" must be ON)	
		UP	AC INPUT: 180 V - 264 V	
		DOWN	AC INPUT: 180 V - 264 V	
SW301 	1	ON	CR Voltage: 75 Vrms	
		OFF	CR Voltage: 90 Vrms	
	2	ON	Frequency: 20 Hz	
		OFF	Frequency: 25 Hz	

The figure in the SWITCH NAME column and the position in  in the SETTING POSITION column indicate the standard setting of the switch. When the switch is not set as shown by the figure and , the setting of the switch varies with the system concerned.

NAP-200-008
Sheet 8/10
Switch Setting of Circuit Card

CAUTION: When the operating power is being supplied to this circuit card, do not plug/unplug this circuit card into/from its mounting slot.

4. PZ-PW112 (PWR)

(1) Locations of Lamps, Switches, and Connectors (see [Figure 008-2](#))

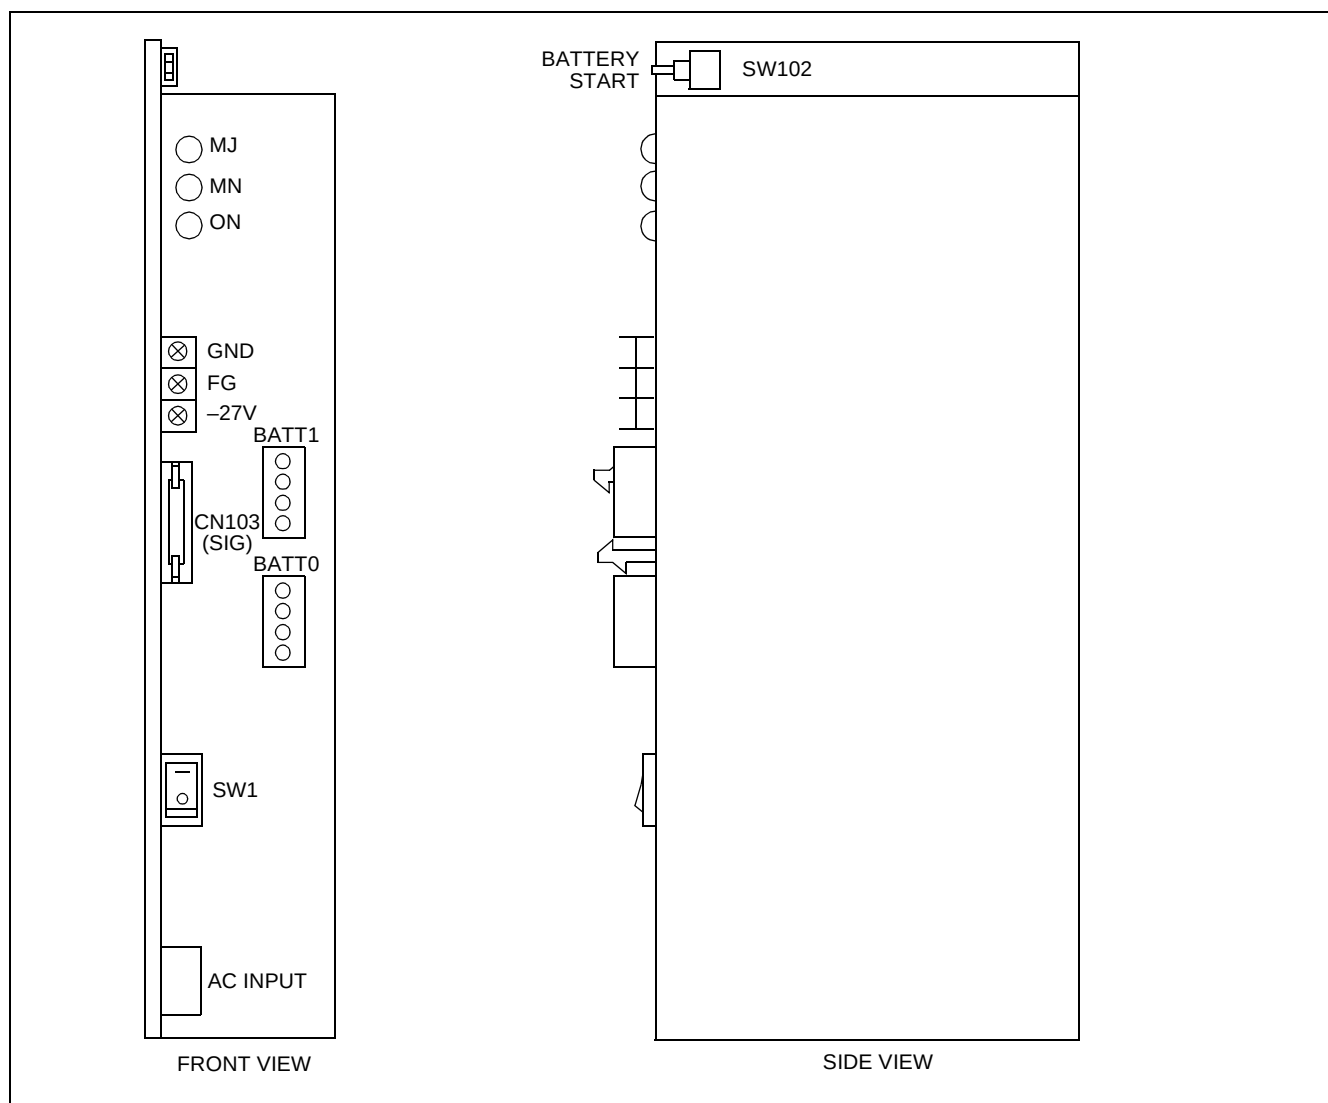


Figure 008-3 PZ-PW112 (PWR) Card

NAP-200-008
Sheet 9/10
Switch Setting of Circuit Card


(2) Lamp Indications (see [Table 008-7](#))

Table 008-7 PZ-PW112 (PWR) Card Lamp Indications

LAMP NAME	COLOR	FUNCTION
MJ	Red	Lights upon occurrence of a major fault.
MN	Yellow	Lights upon occurrence of a minor fault.
ON	Green	Remains lit while the power is on.

(3) Switch Settings (see [Table 008-8](#))

Table 008-8 PZ-PW112 (PWR) Card Switch Settings

SWITCH NAME	SWITCH NUMBER	SETTING POSITION	FUNCTION	CHECK
SW ON (–)  OFF (O)		 ON	For turning AC power and the battery on	
		OFF	For turning AC power and the battery off	
SW102 (Battery Start) 		PRESS MOMENTARILY	To start each PIM on battery power, when AC power is not provided (switch “SW” must be ON)	

The figure in the SWITCH NAME column and the position in  in the SETTING POSITION column indicate the standard setting of the switch. When the switch is not set as shown by the figure and , the setting of the switch varies with the system concerned.

NAP-200-008
Sheet 10/10
Switch Setting of Circuit Card

5. PN-8COTM/8COTP

(1) Locations of Lamps, Switches and Connectors (see [Figure 008-4](#))

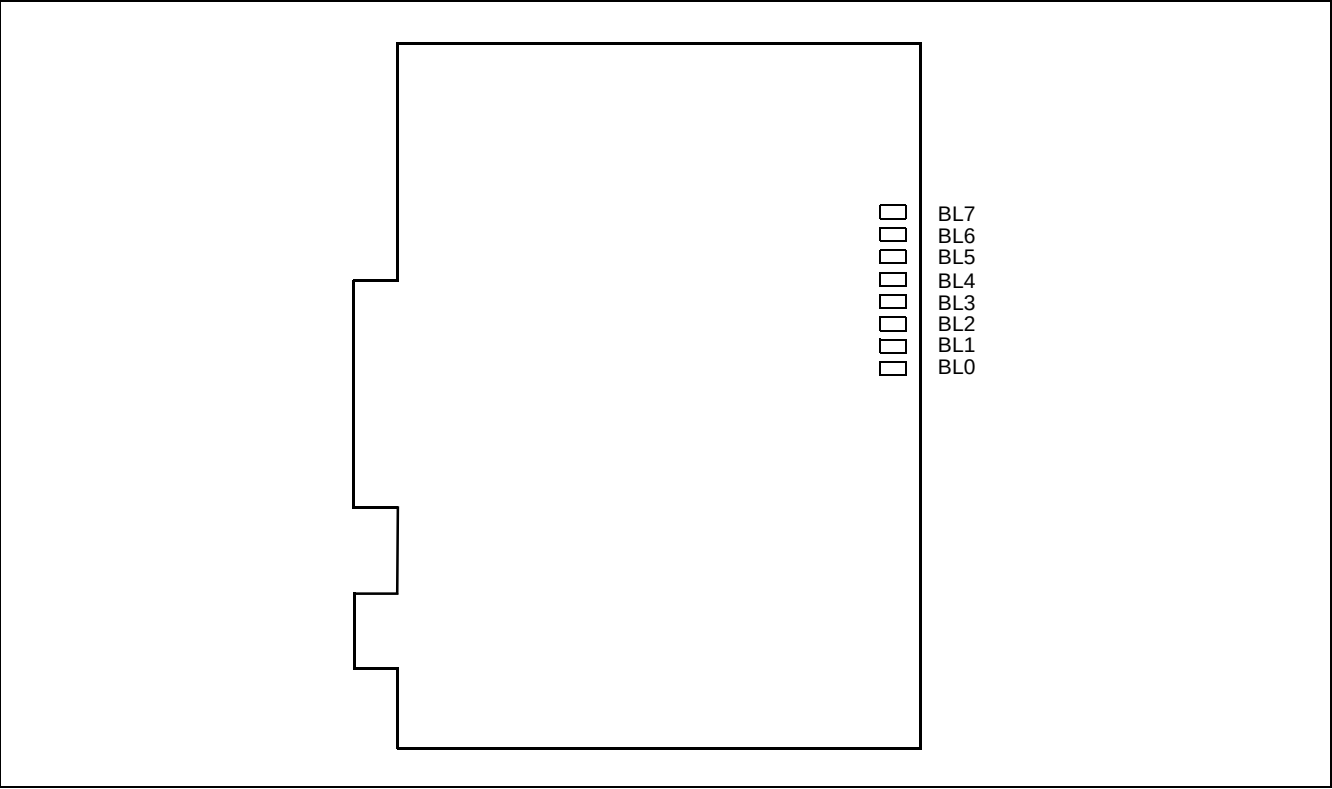


Figure 008-4 PN-8COT (COT) Card

(2) Lamp Indications (see [Table 008-9](#))

Table 008-9 PN-8COT (COT) Card Lamp Indications

LAMP NAME	COLOR	FUNCTION
BL0 - 7	Red	- Remains lit when the corresponding circuit is in use. - Flashes at 60 IPM when the corresponding circuit is in the make-busy state or the system data for this card is not assigned.

(3) Switch Settings

This card has no switches.

NAP-200-009
Sheet 1/3
Mounting Circuit Cards

1. MOUNTING PROCEDURE

- (1) For testing, turn on “SW1” switch on the PZ-PW86/PZ-PW112 card. Make sure that “ON” lamp (green) is lit. See [Figure 009-1](#).
- (2) Turn off “SW1” switch.

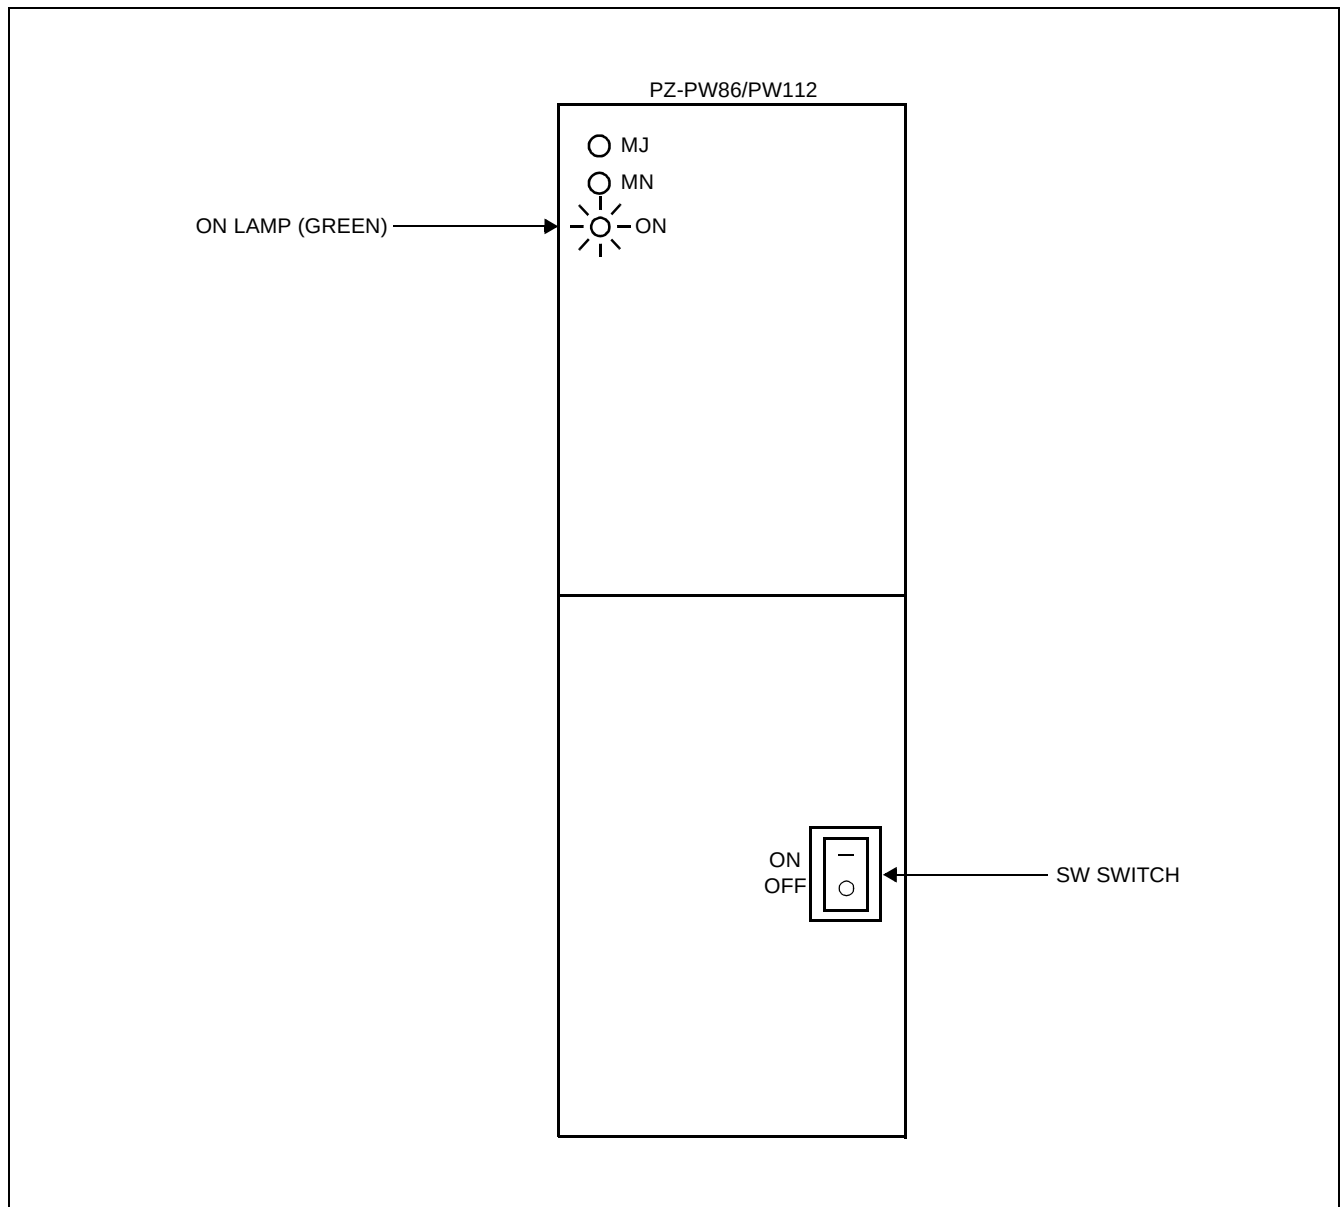


Figure 009-1 PZ-PW86/PZ/PW112 Card Lamp Indication

NAP-200-009
Sheet 2/3
Mounting Circuit Cards

- (3) Before mounting the circuit cards, confirm the following items.
- Wrist Strap is connected Frame Ground.
 - Switch setting of circuit cards is already completed (Refer to the Circuit Card Manual).
 - “SW1” switch of PZ-PW86PZ/PW112 Card is turned off.
- (4) Mount circuit cards into their mounting positions according to the “Bay Face Layout” and “Port Assignment Table” given in the System Data Sheet.

Figure 009-2 shows the mounting method of circuit cards.

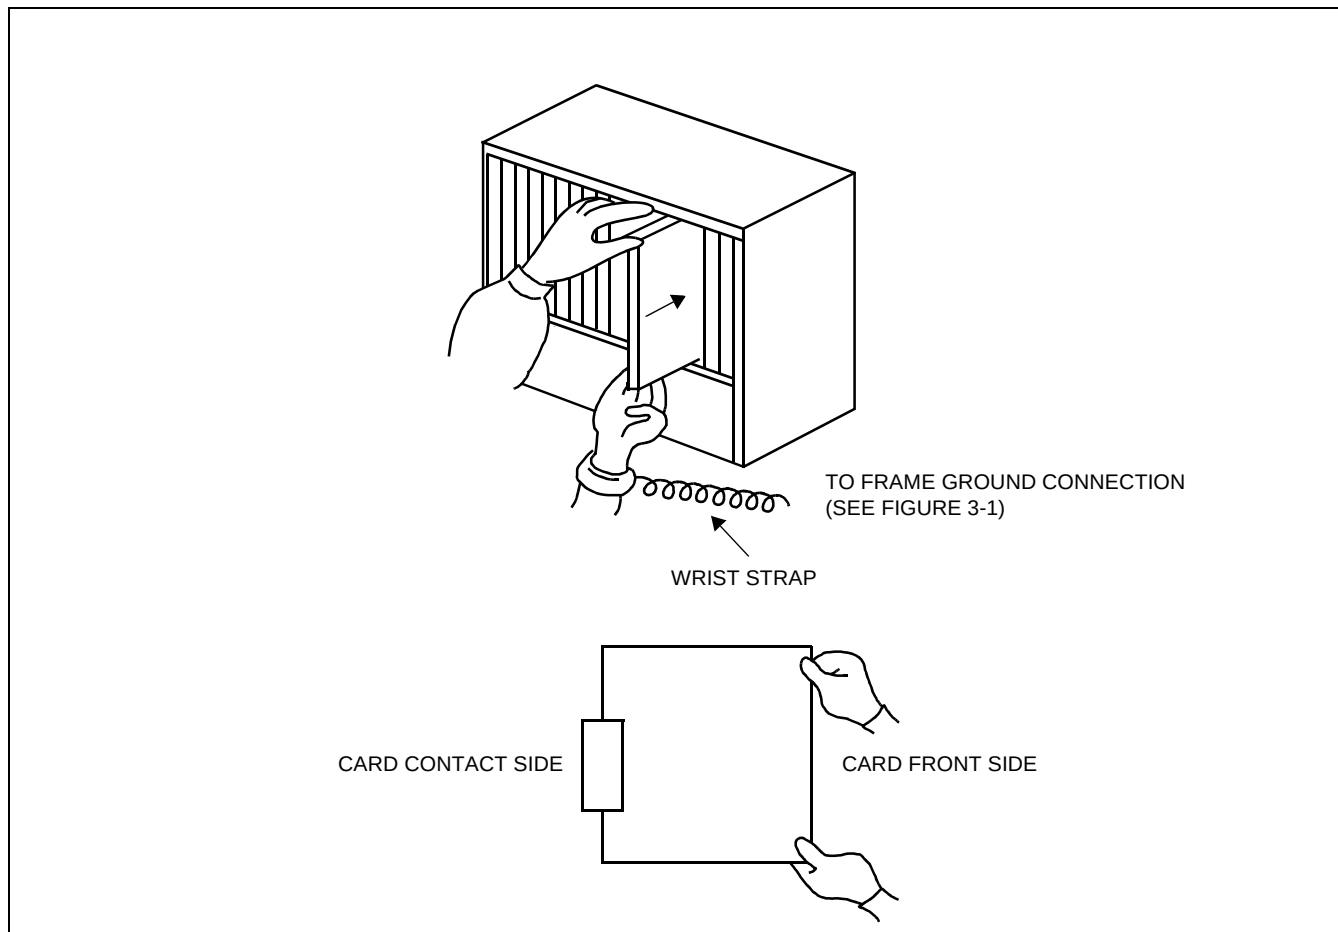


Figure 009-2 Mounting Circuit Cards

NAP-200-009
Sheet 3/3
Mounting Circuit Cards

- (5) Install the Card Stopper according to the following procedure:
- Insert the left side of the Card Stopper to the slot for the Card Stopper as shown in Fig.(A) of [Figure 009-3](#).
 - Loosen the attached screw for the Card Stopper, and hang the right side of the Card Stopper onto the screw. Then, tighten the screw as shown in Fig.(B) of [Figure 009-3](#).

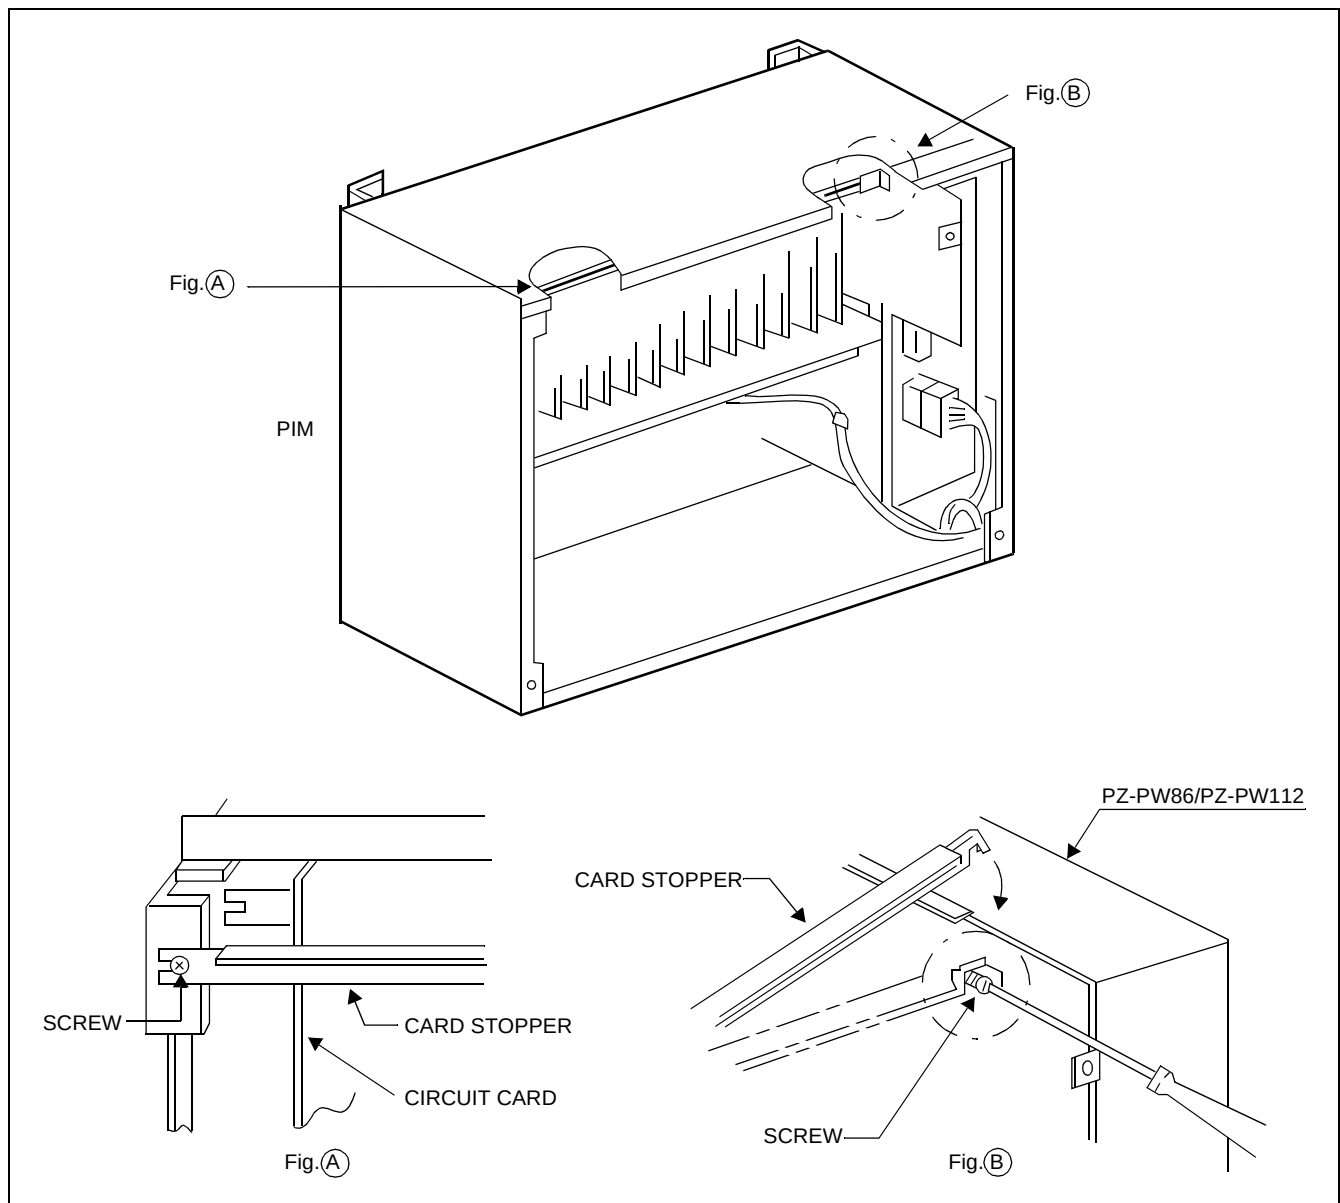


Figure 009-3 Installing Card Stopper

NAP-200-010
Sheet 1/7
System Initialization and System Data Entry

1. SYSTEM INITIALIZATION

- There are two methods for System Initialization. The first method is to Clear All Data, except LEN0000 as a CAT terminal, and then program the System Data. The second method is to use the Resident System Program, which causes the system to configure itself automatically to the default settings, wherever the line/trunk cards are installed. Refer to the System Data Sheet, for the default settings.
- Turn on the “SW1” switch on the PZ-PW86/PZ-PW112 card.
 - The “ON” lamp must be lit on the PZ-PW86/PZ-PW112 card.

1.1 All Clear, Except LEN0000 CAT

STEP 1: On the MP Card, set SW3 to “B” and press SW1.

STEP 2: When the “MN” lamp on the system is lit, set SW3 to the “0” position and press SW1.

- The operating mode has been changed to the ON LINE mode.

1.2 Resident System Program

STEP 1: Mount the Line/Trunk cards into PIM.

STEP 2: On the MP Card, set SW3 to “C” and press SW1.

- After 30 to 40 seconds, the “MN” lamp turns on.
- The system has loaded the Resident System Program.

Note: If the “MJ” lamp is lit, repeat Step 2.

STEP 1: Set SW3 to the “0” position and press SW1.

- The operating mode has been changed to the ON LINE mode.

Note 1: Refer to the System Data Sheet for additional information on the Resident System Program and the initialization of the system without a MAT (enabling CAT mode).

Note 2: After the Resident System Program has been loaded and need to do the System ID load CM83>0> ID number and CM3509, 3520 Route 00 data 15 and System Reset (system with 8COT card).

NAP-200-010
Sheet 2/7
System Initialization and System Data Entry

2. SYSTEM DATA ENTRY

- There are two methods for data entry, both of which employ a Customer Administration Terminal (CAT) or a Maintenance Administration Terminal (MAT).

2.1 CAT

Any multiline terminal can be assigned as a CAT terminal through programming. The multiline terminal can still be used as a regular telephone when it is not in CAT mode. If the system is initialized by “C” (Resident System Program), every multiline terminal will be able to go into CAT mode. If the system is initialized by “B” (All Clear), only LEN0000 is assigned as a CAT port (the DLC card must be installed in slot LT00).

The following procedures provide actions to set up a multiline terminal as a CAT.

To set CAT mode:

- (1) Press
- (2) Press
 - CNF lamp flashes.
- (3) Press
 - CNF lamp is off.
- (4) Press
- (5) Press
 - CNF lamp flashes.
- (6) Press
 - CNF, SPKR, ANS lamps are lit.
 - “CAT MODE” displays on the LCD.
- (7) Press
 - “COMMAND = -” displays on the LCD.

Note: *It is necessary to complete Steps 1 through 6 within 4 seconds.*

NAP-200-010
Sheet 3/7
System Initialization and System Data Entry

To reset CAT mode:

While “COMMAND = -” is displayed on the LCD:

- (1) Lift the handset (off hook)
 - SPKR lamp turns off.
- (2) Restore the handset (on hook)
 - CNF, ANS lamps turn off.
 - LCD returns to clock.

The 48-port Quick Install program allows the technician to set up the NEAX1000 IVS by completing a step-by-step guide to install and program stations, line keys, and selective features into the NEAX1000 IVS. Additional programming can be done using the CAT or MAT.

2.2 MAT

In addition to the CAT mode programming, the MAT can also be used in the MAT mode. Refer to the MAT Operation Guide and the Command Manual.

2.3 Feature Programming

This section provides the feature programming (Music On Hold, Push Button Calling) related to the internal PB Receiver and internal TNT on the MP card. For the other feature programming, refer to the Feature Programming Manual.

In the programming procedure, the meaning of (1), (2) and marking are as follows:

(1) : 1st Data

(2) : 2nd Data

◀ : Initial Data

With the system data clear command (CM00, CM01), the data with this marking (◀) is automatically assigned for each command.

INITIAL : System Initialization

After entering the data, system initialization is required (Press SW1 on MP card).

NAP-200-010
Sheet 4/7
System Initialization and System Data Entry

(1) Programming Procedure for Music On Hold

For providing Hold Tone Source on the MP card:

START	DESCRIPTION	DATA
CM08	Select the music to be provided.	(3) 183 (4) 0: Nocturne 1 ◀ : Minuet
CM48	Define the type of call to be provided with Hold Tone on the MP card. Note: When using the MP card, set the JP1 switch to UP (Internal Hold Tone Source).	. Y = 0 (1) 00: C.O. Line Call 01: Tie Line Call 02: Internal Call (2) 1400: Hold Tone Source on MP card
END		

For providing External Hold Tone Source through the MP card:

START	DESCRIPTION	DATA
CM48	Define the type of call to be provided with Hold Tone.	. Y = 0 (1) 00: C.O. Line Call 01: Tie Line Call 02: Internal Call (2) 1400: Hold Tone Source through MP card
END		

NAP-200-010
Sheet 5/7
System Initialization and System Data Entry

For providing External Hold Tone Source through MP card:

- External Hold Tone Source provided locally

For connecting the External Hold Tone Source, plug the cable into the MP card jack. See [Figure 0010-1](#).

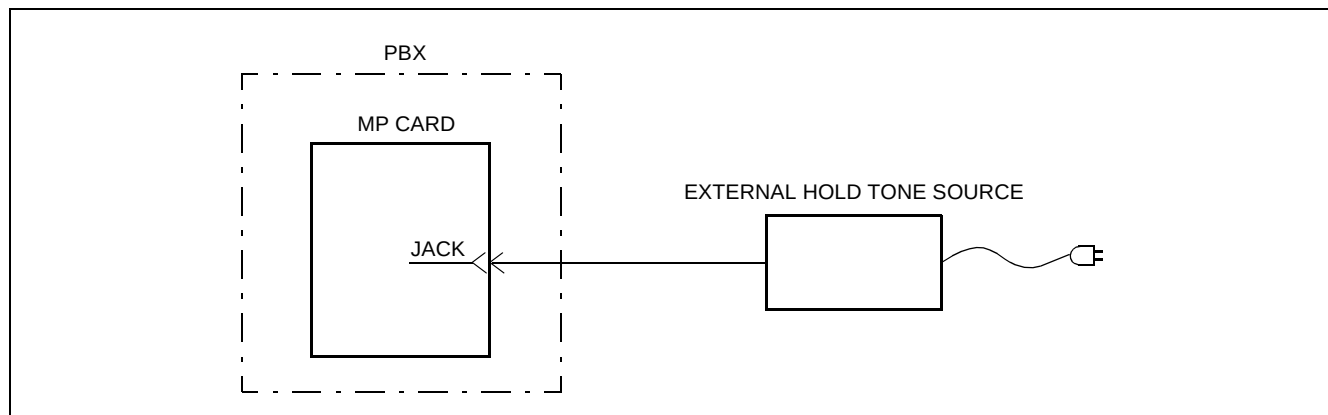


Figure 0010-1 Connecting External Hold Tone Source

Set the switches on the MP card as shown in [Figure 0010-2](#).

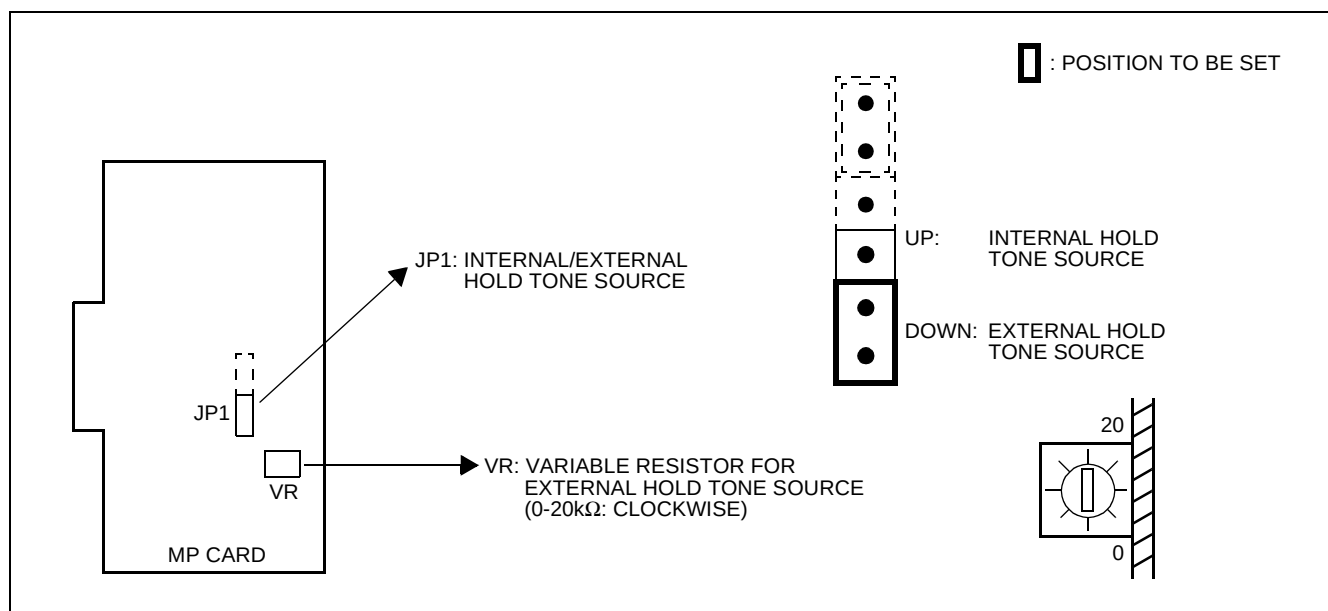


Figure 0010-2 MP Card Switch Setting

Note: To set Hold Tone Source on the MP card, set the JP1 switch to UP.

NAP-200-010
Sheet 6/7
System Initialization and System Data Entry

(2) Programming Procedure for Pushbutton Calling

START	DESCRIPTION	DATA
CM10	Assign the Card Number of internal PB Receiver to the LEN No. 0124. Note: When using the internal PB Receiver on the MP card, assign the Card No. E200-E203 to the LEN No. 0124. If resident load is used, PB Receiver ports (E200-LENS 0124) are automatically assigned.	(1) LEN: 0124 (2) E200-E203 (PB Receiver No.)
CM12	Assign the type of telephone set (DTMF) to DTMF Stations. This data assignment is not required for Multiline Terminal station.	. YY = 00 (1) X-XXXX (Station No.) (2) 2 : DTMF Telephone set
CM45	Assign PB Receivers for use with DTMF Stations.	. Y = 0 (Make Busy) (1) XX X └─┬─┘ Circuit No. 0-3 └─┬─┘ Card No. 00-03 assigned by CM10(E200-E203) (2) ◀:Make Busy Cancel . Y = 1 (Purpose) (1) XXX (Ditto to Y = 0) (2) 1 ◀:For both DTMF station and Tie Line/ DID
A		

NAP-200-010
Sheet 7/7
System Initialization and System Data Entry

	DESCRIPTION	DATA
A CM35	Assign the type of signaling (DTMF) for Outgoing and Bothway Trunk Routes. Specify the DTMF Sender characteristics to match the distant office.	. YY = 01 (1) Trunk Route No. (00 - 63) (2) 7 ◀ . YY = 24 (DTMF Inter Digital Pause) (1) Trunk Route No. (00 - 63) 0 : 32ms 1 : 64ms 2 : 80ms 3 : 96ms 4 : 160ms 5 : 192ms 6 : 240ms 7 ◀ : 128ms . YY = 26 (DTMF Sender Signal Width) (1) Trunk Route No. (00 - 63) (2) 0/1 ◀ : 64ms/128ms . YY = 46 (DTMF Sender Release Timing) (1) Trunk Route No. (00 - 63) 0 : 2sec. 1 : 4sec. 2 : 6sec. 3 : 8sec. 4 : 12sec. 5 : 14sec. 6 : 16sec. 7 ◀ : 10sec.
CM08	Assign whether “*” or “#” from a DTMF Telephone is used as Switch Hook Flash while hearing Busy Tone.	(1) 050 (* is used as Switch Hook Flash) (2) 0: Available (1) 052 (# is used as Switch Hook Flash) (2) 0: Available
END		

NAP-200-011
Sheet 1/1
Operation Test

1. OPERATION TEST

Confirm the entered system data and hardware, including cable connection, by completing the following operational tests.

- Basic Connection Test at MDF
 - Station Line Test (Operator Call from all stations)
 - Central Office Trunk Test (Incoming, Outgoing)
 - Tie Line Trunk Test (Incoming, Outgoing)
- Service Feature Test
 - Call Transfer
 - Step Call
 - Executive Right of Way
 - Call Hold
 - Call Back
 - Call Forwarding-All Calls/No Answer/Busy Line
 - Call Pickup
 - Station Hunting-Pilot/Circular
 - Speed Calling-System/Station
 - Paging Access
 - Announcement Service
 - etc.

NAP-200-012
Sheet 1/1
Cleaning and Visual Check

1. CLEANING

Clean the following places:

- Inside of the main equipment, especially the bottom of the base.
- On the Top Cover.
- Around the Main Equipment and the MDF.
- Keyboard on the Attendant Console.

2. VISUAL CHECK

- (1) Check to see if all circuit cards are in their positions correctly.
- (2) Check that the cable connections in the PIM are correctly and completely connected, and the routing of the cables has been done smoothly and neatly.
- (3) Check to see if the MAT is removed.

NAP-200-013
Sheet 1/1
Mounting of Front Cover

1. MOUNTING FRONT COVER

Mount the Front Cover onto PIM using the provided screws as shown in [Figure 013-1](#).

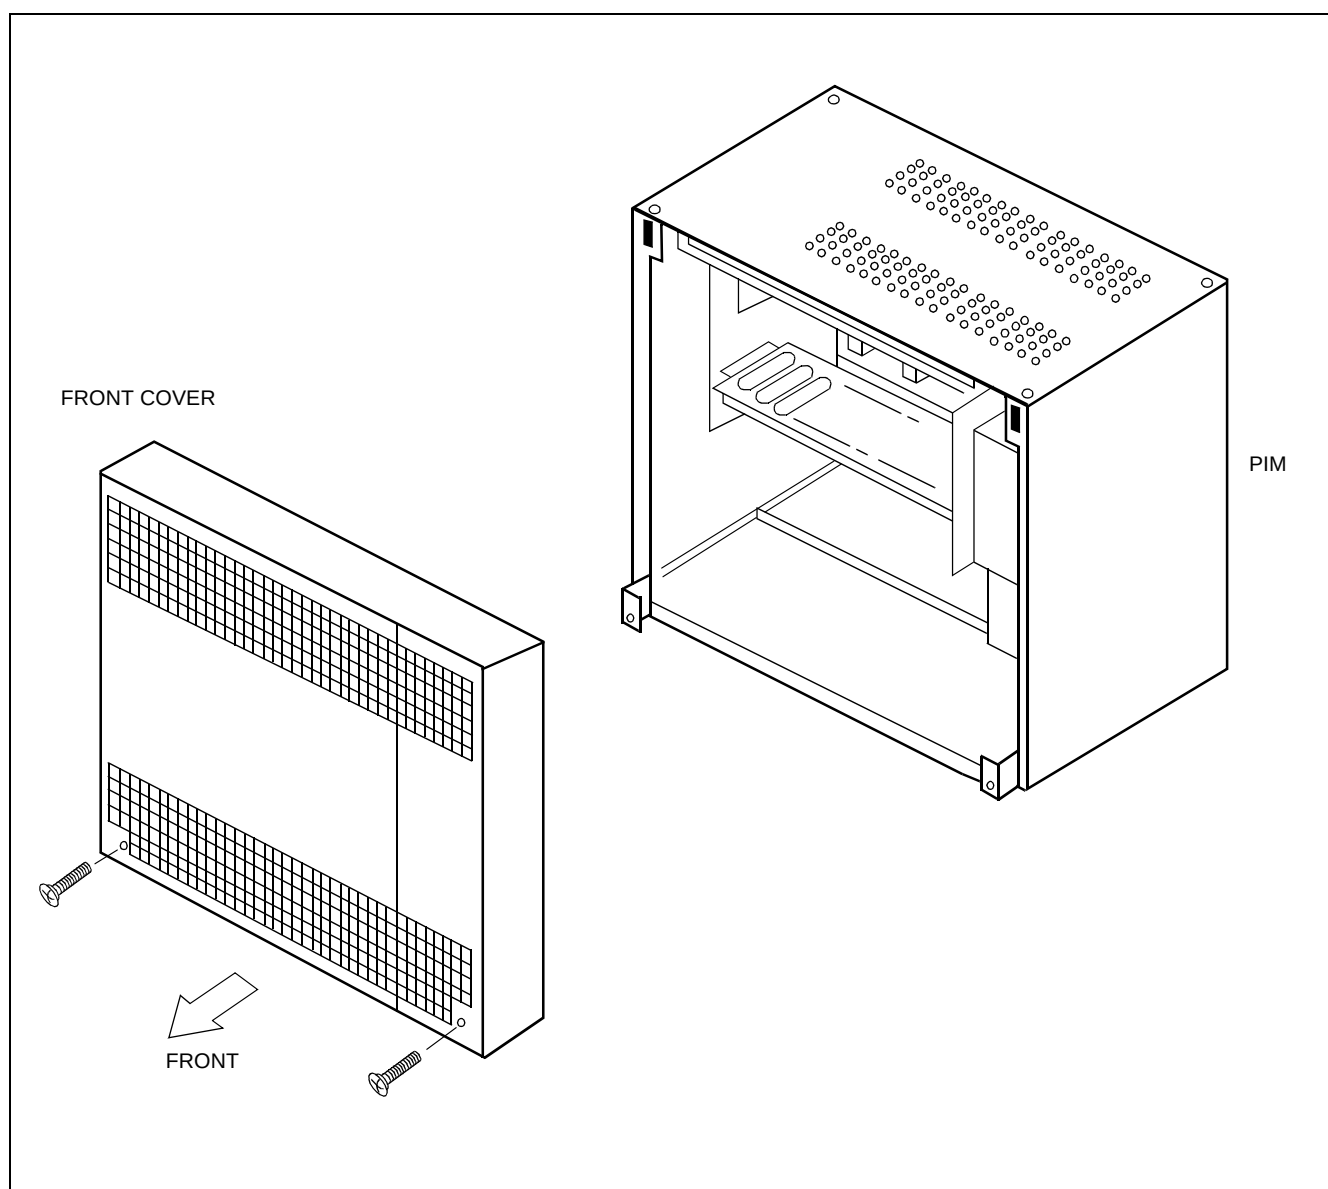


Figure 013-1 Mounting Front Cover

This page is for your notes.

CHAPTER 4 OFFICE DATA PROGRAMMING

1. CUSTOMIZING DATA

1.1 Data Programming Procedure

Table 4-1 shows the procedure and the outline of the work related data programming for the system.

Table 4-1 Data Programming Procedure

STEP	WORK	REMARKS
1	Obtain the customer's requirements, and fill in the Customer Specification Sheets on Section 1.3.	
2	Allocate the LC, TRUNK and other interface cards to the Port Assignment Table on Section 1.2.7. Make a Bay Face Layout on Section 1.4.2 for accommodating cards required in the system.	
3	Fill in the data programming sheets on Section 2 with the Customer Specification Sheet, Port Assignment Table and Bay Face Layout completed as steps 1 and 2.	For programming method and detailed information on commands, refer to the Command Manual.
4	Ensure that the data on all programming sheets are correct and consistent with customer specifications.	
5	Specify the switch setting on the boards with the Switch Setting Table in the Circuit Card Manual.	For the function of each switch on the cards, refer to the Circuit Card Manual.

1.2 General Information on Customizing Data

1.2.1 Numbering Plan

This table specifies the service feature access codes, trunk access code, station numbers and other special access codes. The service feature access codes and trunk access codes are given to each service feature and each trunk routes, respectively, with a maximum three-digit code. The station numbers are specified by a maximum of four digits.

For the numbering plan of the system the following conditions should be considered.

- (1) The same first digit code cannot be assigned to the other features within the Numbering Plan Group programmed. (This condition is not applicable to the system providing the Single Digit Timing Start Access.)
- (2) The feature access codes should be two or three digits because multiple access codes for each feature are required.
- (3) There are four types of station numbering (1 digit – 4 digits), and any combination of these types is available in one system.
- (4) The same station number cannot be assigned, even if the tenant service is applied.

1.2.2 Station Data

In this table, the following data are required.

- Station Number: Station numbers (up to four digits), specified in the Numbering Plan Table, are assigned. For the Multiline Terminal station, specify the Primary Extension Number.
- Type of Telephone

The type of station telephone set is specified as shown below.

<u>TYPE OF TEL</u>	<u>DESCRIPTION</u>
DP.....	Dial Pulse Telephone set
PB.....	DTMF Telephone set
Multiline Terminal.....	Multiline Terminal set

- SERVICE CLASS-A/B/C

Specify the service class (1-15) programmed in the Service Restriction Data Table.

- RESTRICTION CLASS-DAY/NIGHT

Specify the Trunk Restriction Class as shown below.

- 1: Unrestricted
- 2: Non-Restricted-1
- 3: Non-Restricted-2
- 4: Semi-Restricted 1
- 5: Semi-Restricted 2
- 6: Restricted 1
- 7: Restricted 2
- 8: Fully-Restricted

- DIT TRUNK NUMBER

In the case of the DIT (Direct-In Termination) station, specify the trunk number connected.

1.2.3 Trunk Data

In this table, the following data are required:

- ACCESS NUMBER

Specify the access code for the trunks.

- DESTINATION

Specify the distant office such as Central Office (Public Exchange), Tie Line, etc.

- NUMBER OF LINE

Specify the number of trunks to be provided with each route (IC-Incoming, OG-Outgoing, BW-Bothway).

- DP/PB

Specify the type of address signal from/to distant office, as shown below.

<u>TYPE OF TEL</u>	<u>DESCRIPTION</u>
DP	Dial Pulse
PB	DTMF Signal

- KIND OF SIGNAL

Specify the kind of signaling system such as Ring Down, Loop, E & M etc. at the line.

1.2.4 Station Hunting Group Data

This data table requires the following data:

- KIND OF STATION HUNTING

Specify the kind of the Station Hunting System (Pilot/Circular/Switch Back). In the case of the Pilot System, specify the Pilot Station Number.

- SECRETARY STATION

Specify the Secretary Station Number, if provided.

- STATION NUMBER

Specify the station numbers to be assigned to the station hunting group with the following conditions.

(1) Up to 60 stations can be assigned per Station Hunting Group.

(2) There is no limitation to the number of Station Hunting Groups.

The same one station cannot be assigned to multiple Hunting Groups.

1.2.5 Call Pickup Group Data

The station number to be assigned to the Call Pickup Group with the following conditions.

(1) Up to 60 station can be assigned per Call Pickup Group.

(2) There is no limitation to the number of Call Pickup Groups.

(3) The same one station cannot be assigned to multiple Call Pickup Groups.

1.2.6 Speed Calling-System Data

This data table requires the abbreviated code and the stored number to be sent out. A maximum stored number of 28 digits can be assigned.

1.2.7 Port Assignment Table

Specify the station number or trunk number corresponding to the LEN (Line Equipment Number) as shown in [Table 4-2](#). The LEN means physical location number within the PIM.

Table 4-2 Port Assignment Method

CARD TO BE ASSIGNED	PORT ASSIGNMENT TABLE	REMARKS
PN-8LC PN-8DLC PN-8COT		For PN-8DLC, specify primary extension numbers of multiline terminal as follows: <u>XXXX</u> └─ Primary Extension Number
PN-4LC PN-4DLC		- Station number must be assigned to 1st LEN (LEVEL 0) through 4th LEN (LEVEL 3) of each LT slot. - For PN-4DLC, specify primary extension numbers of multiline terminal as follows: <u>XXXX</u> └─ Primary Extension Number

Table 4-2 Port Assignment Method (Continued)

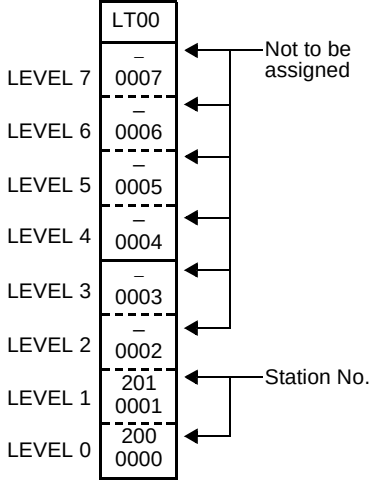
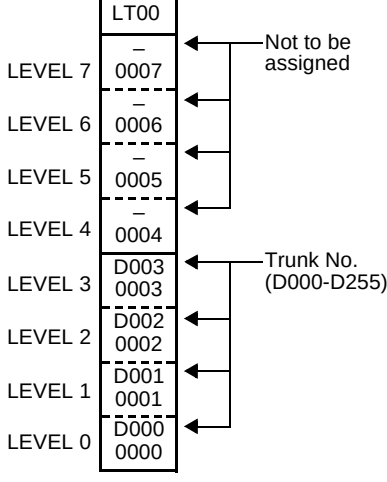
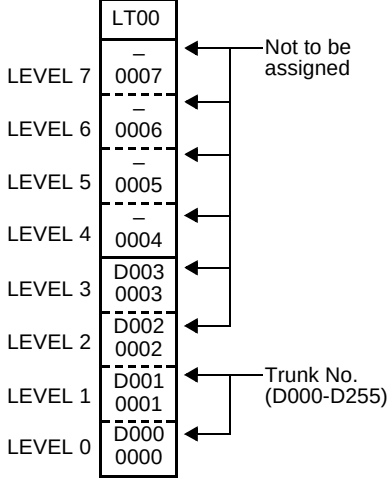
CARD TO BE ASSIGNED	PORT ASSIGNMENT TABLE	REMARKS
PN-AUC PN-2DLC	 Diagram illustrating the port assignment table for PN-AUC and PN-2DLC. The table shows levels 0 through 7. Level 0 contains values 200 and 0000. Level 1 contains values 201 and 0001. Levels 2 through 7 contain values 0002 through 0007. Arrows indicate that levels 2 through 7 are 'Not to be assigned' and level 1 is the 'Station No.'.	- Station number must be assigned to 1st LEN (LEVEL 0) and/or 2nd LEN (LEVEL 1) of each LT slot. - For PN-2DLC, specify primary extension numbers of multiline terminal as follows: XXXX Primary Extension Number
PN-4COT PN-4DIT	 Diagram illustrating the port assignment table for PN-4COT and PN-4DIT. The table shows levels 0 through 7. Level 0 contains values D000 and 0000. Level 1 contains values D001 and 0001. Level 2 contains values D002 and 0002. Level 3 contains values D003 and 0003. Levels 4 through 7 contain values 0004 through 0007. Arrows indicate that levels 4 through 7 are 'Not to be assigned' and levels 0 through 3 are 'Trunk No. (D000-D255)'.	Trunk number must be assigned to 1st LEN (LEVEL 0) through 4th LEN (LEVEL 3) of each LT slot.
PN-AUC PN-2ODT	 Diagram illustrating the port assignment table for PN-AUC and PN-2ODT. The table shows levels 0 through 7. Level 0 contains values D000 and 0000. Level 1 contains values D001 and 0001. Level 2 contains values D002 and 0002. Level 3 contains values D003 and 0003. Levels 4 through 7 contain values 0004 through 0007. Arrows indicate that levels 4 through 7 are 'Not to be assigned' and levels 0 through 3 are 'Trunk No. (D000-D255)'.	Trunk number must be assigned to 1st LEN (LEVEL 0) and/or 2nd LEN (LEVEL 1) of each LT slot.



Table 4-2 Port Assignment Method (Continued)

CARD TO BE ASSIGNED	PORT ASSIGNMENT TABLE	REMARKS
PN-2DAT	Diagram showing port assignment for PN-2DAT card. Levels 0 to 7 are shown. Level 0 contains EB000 and 0000. Level 1 contains 0001. Level 2 contains EB001 and 0002. Level 3 contains 0003. Level 4 contains 0004. Level 5 contains 0005. Level 6 contains 0006. Level 7 contains 0007. Arrows indicate that levels 2 through 7 are 'Not to be assigned'. An arrow points to level 2, indicating it is assigned 'Card No. (EB000-EB031)'.	Card number must be assigned to 1st LEN (LEVEL 0) and/or 3rd LEN (LEVEL 2) of each LT slot.
PN-8RST	Diagram showing port assignment for PN-8RST card. Levels 0 to 7 are shown. Level 0 contains E200 and 0000. Level 1 contains 0001. Level 2 contains E201 and 0002. Level 3 contains 0003. Level 4 contains 0004. Level 5 contains 0005. Level 6 contains 0006. Level 7 contains 0007. Arrows indicate that levels 2 through 7 are 'Not to be assigned'. An arrow points to level 2, indicating it is assigned 'Card No. (E200-E203)'.	Card number must be assigned to 1st LEN (LEVEL 0) and/or 3rd LEN (LEVEL 2) of each LT slot. Note: When using the internal DTMF Receiver on the MP card, assign Card No. E200 to LEN No. 0124.
PN-DK00	Diagram showing port assignment for PN-DK00 card. Levels 0 to 7 are shown. Level 0 contains E800 and 0000. Level 1 contains 0001. Level 2 contains E801 and 0002. Level 3 contains 0003. Level 4 contains 0004. Level 5 contains 0005. Level 6 contains 0006. Level 7 contains 0007. Arrows indicate that levels 2 through 7 are 'Not to be assigned'. An arrow points to level 2, indicating it is assigned 'Card No. (E800-E807) (E900-E915)'.	- Card number must be assigned to 1st LEN (LEVEL 0) and/or 3rd LEN (LEVEL 2) of each LT slot. - Card numbers of External Equipment Interface are E800-E807. - Card numbers of External Key Interface are E900-E915.

Table 4-2 Port Assignment Method (Continued)

CARD TO BE ASSIGNED	PORT ASSIGNMENT TABLE	REMARKS
PN-CFT	Diagram illustrating the Port Assignment Table for PN-CFT card. The table shows levels 7 through 0. Level 7 contains LT00 and 0007. Levels 6 through 3 contain dashes and 0006 through 0003. Level 2 contains a dash and 0002. Level 1 contains a dash and 0001. Level 0 contains ED00 and 0000. Arrows indicate that levels 7 through 1 are 'Not to be assigned' and level 0 is assigned as 'Card No. (ED00-ED03)'.	Card number must be assigned to 1st LEN (LEVEL 0) of each LT slot.
PN-2DPC	Diagram illustrating the Port Assignment Table for PN-2DPC card. The table shows levels 7 through 0. Level 7 contains LT00 and 0007. Levels 6 through 3 contain dashes and 0006 through 0003. Level 2 contains F201 and 0002. Level 1 contains a dash and 0001. Level 0 contains F200 and 0000. Arrows indicate that levels 7 through 3 are 'Not to be assigned' and level 2 is assigned as 'Primary Extension No. (FX-FXXXX)'.	- To assign data station number to PN-2DPC by CM1A, specify primary extension number of multiline terminal as a dummy station number. - Primary extension number must be assigned to 1st LEN (LEVEL 0) and/or 3rd LEN (LEVEL 2) of each LT slot.
PN-TNT	Diagram illustrating the Port Assignment Table for PN-TNT card. The table shows levels 7 through 0. Level 7 contains LT00 and 0007. Levels 6 through 3 contain dashes and 0006 through 0003. Level 2 contains DA09 and 0002. Level 1 contains a dash and 0001. Level 0 contains DA00 and 0000. Arrows indicate that levels 7 through 3 are 'Not to be assigned' and level 2 is assigned as 'Card No. (DA00-DA09)'.	Card number must be assigned to 1st LEN (LEVEL 0) and/or 3rd LEN (LEVEL 2) of each LT slot.

Table 4-2 Port Assignment Method (Continued)

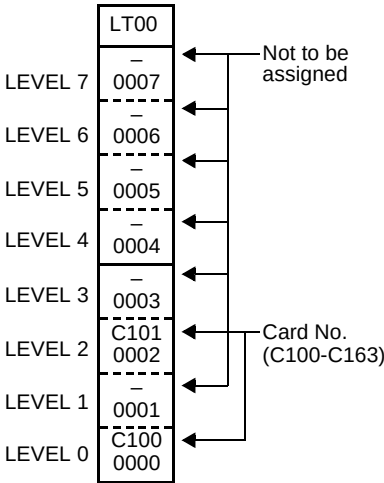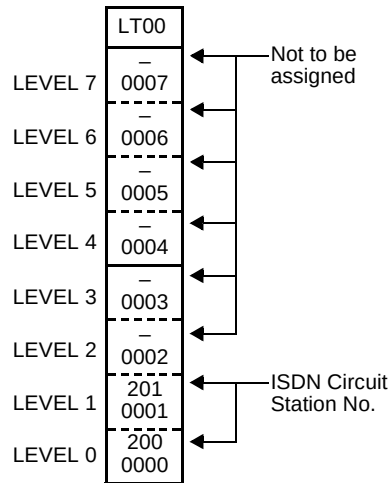CARD TO BE ASSIGNED	PORT ASSIGNMENT TABLE	REMARKS
PN-2AMP	 Diagram illustrating the port assignment table for PN-2AMP. The table shows levels 0 through 7. Levels 0, 2, and 7 are marked as 'Not to be assigned'. Levels 1 through 6 are assigned card numbers C100 through C107. Level 2 is specifically labeled 'Card No. (C100-C163)'.	Card number must be assigned to the 1st LEN (LEVEL 0) and/or 3rd LEN (LEVEL 2) of each LT slot.
PN-2ILC	 Diagram illustrating the port assignment table for PN-2ILC. The table shows levels 0 through 7. Levels 0, 2, and 7 are marked as 'Not to be assigned'. Levels 1 through 6 are assigned ISDN circuit station numbers 200 through 207. Level 1 is specifically labeled 'ISDN Circuit Station No.'.	ISDN circuit station number must be assigned to 1st LEN (LEVEL 0) and/or 2nd LEN (LEVEL 1) of each LT slot.

1.3 Customer Specification Sheets

This section provides the various sheets for designing the customer specifications of the PBX. The office data required for customizing the system are programmed with the customer specification. The installer should complete the following sheets by referring the RESIDENT SYSTEM PROGRAM in the Command Manual and [Section 1.2 General Information on Customizing Data](#) of this chapter.

1.3.1 Numbering Plan

Table 4-3 Numbering Plan Data Table

[illegible]

Note: *If space is insufficient, use copies.*

1.3.2 Station Data

Table 4-4 Station Data Table

[illegible]

Note: *If space is insufficient, use copies.*

1.3.3 Trunk Data

Table 4-5 Trunk Data Table

PROGRAMMING: CM10, 30, 35, 36

ACCESS NUMBER	DESTINA- TION	KIND OF TRUNK	TYPE OF TRUNK	NUMBER OF LINE	DP/PB	KIND OF SIGNAL	REMARKS
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				
			IC				
			OG				
			BW				

Note: If space is insufficient, use copies.

1.3.4 Station Hunting Group Data

Table 4-6 Station Hunting Group Data Table

PROGRAMMING: CM18

KIND OF STATION HUNTING	KIND OF STATION HUNTING	KIND OF STATION HUNTING	KIND OF STATION HUNTING
Pilot ()	Pilot ()	Pilot ()	Pilot ()
Circular	Circular	Circular	Circular
Switch Back	Switch Back	Switch Back	Switch Back

SECRETARY STATION	SECRETARY STATION	SECRETARY STATION	SECRETARY STATION

[illegible]

Note: *If space is insufficient, use copies.*

1.3.5 Call Pickup Group Data

Table 4-7 Call Pickup Group Data Table

PROGRAMMING: CM16

STATION NUMBER	STATION NUMBER	STATION NUMBER	STATION NUMBER

Note: *If space is insufficient, use copies.*

1.3.6 Speed Calling-System Data

Table 4-8 Speed Calling-System Data Table

PROGRAMMING: CM71, 72

[illegible]

Note: *If space is insufficient, use copies.*

1.4 System Configuration

1.4.1 Port Assignment Table

Table 4-9 Port Assignment Table

LT SLOT No. →	LT00	LT01	LT02	LT03	LT04	LT05	LT06	LT07	LT08	PIM1
	0127	0071	0079	0087	0095		0103		0111	
	0126	0070	0078	0086	0094		0102		0110	
Fill Blank With Station/Trunk No. →	0125	0069	0077	0085	0093		0101		0109	
	0124	0068	0076	0084	0092		0100		0108	
LEN No. →	0123	0067	0075	0083	0091	0095	0099	0103	0107	
	0122	0066	0074	0082	0090	0094	0098	0102	0106	
	0121	0065	0073	0081	0089	0093	0097	0101	0105	
	0120	0064	0072	0080	0088	0092	0096	0100	0104	
LT SLOT No. →	LT00	LT01	LT02	LT03	LT04	LT05	LT06	LT07	LT08	PIM0
	0063	0007	0015	0023	0031		0039		0047	
	0062	0006	0014	0022	0030		0038		0046	
Fill Blank With Station/Trunk No. →	0061	0005	0013	0021	0029		0037		0045	
	0060	0004	0012	0020	0028		0036		0044	
LEN No. →	0059	0003	0011	0019	0027	0031	0035	0039	0043	
	0058	0002	0010	0018	0026	0030	0034	0038	0042	
	0057	0001	0009	0017	0025	0029	0033	0037	0041	
	0056	0000	0008	0016	0024	0028	0032	0036	0040	

1.4.2 Bay Face Layout for Module

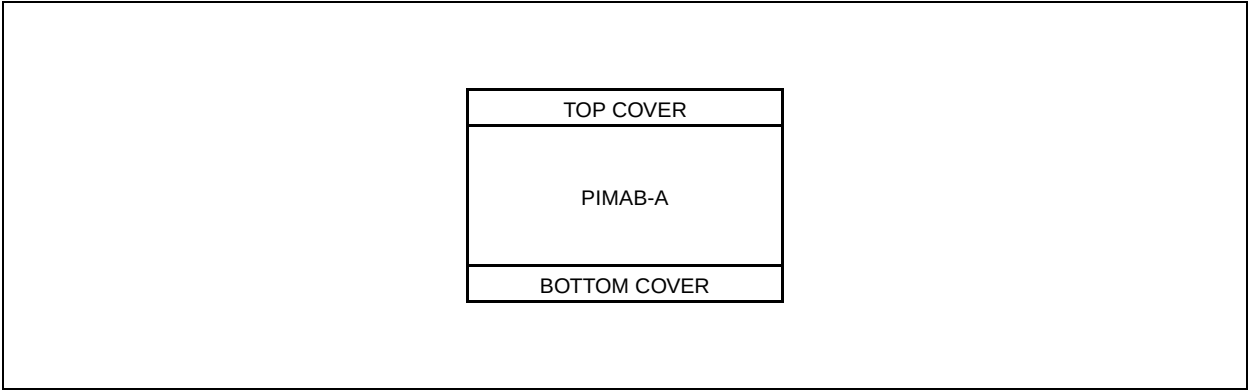


Figure 4-1 Module Configuration

Table 4-10 Quantity Table for Module

FUNCTIONAL NAME	MODULE	QUANTITY	REMARKS
PIM	SN1420 PIMAB-A		
TOP/BOTTOM COVER		1	
19" BRACKET	19" BRACKET (H)		

1.4.3 Quantity Table for Circuit Cards

Table 4-11 Quantity Table for Line/Trunk Circuit Cards

FUNCTIONAL NAME (CARD NAME)	QUANTITY	FUNCTIONAL NAME (CARD NAME)	QUANTITY
AMP (PN-2AMP)		DLC (PN-8DLC)	
AUC (PN-AUC)		DPC (PN-2DPC)	
CFT (PN-CFT)		ILC (PN-2ILC)	
COT (PN-4COT)		LC (PN-4LC)	
COT (PN-8COT)		LC (PN-8LC)	
DAT (PN-2DAT)		M03 (PN-M03)	
DIT (PN-4DIT)		ODT (PN-2ODT)	
DK (PN-DK00)		PBR (PN-8RST)	
DLC (PN-2DLC)		TNT (PN-TNT)	
DLC (PN-4DLC)			

Table 4-12 Quantity Table for Control Circuit Cards

FUNCTIONAL NAME (CARD NAME)	QUANTITY	FUNCTIONAL NAME (CARD NAME)	QUANTITY
MP (PN-CP03)	1	PWR (PZ-PW86)	
BS00 (PN-BS00-B)		PWR (PZ-PW112)	
BS01 (PN-BS01-B)			

Table 4-13 Quantity Table for Application Circuit Cards

FUNCTIONAL NAME (CARD NAME)	QUANTITY	FUNCTIONAL NAME (CARD NAME)	QUANTITY
AP00 (PN-AP00)		DTI (PN-24DTA)	
AP01 (PN-AP01)		ETHER (PN-CC00)	
BRI (PN-BRTA)		EXTMEM (PN-ME00)	
CCH (PN-SC00)		ICH (PN-SC02/SC03)	
CIR (PN-4RSTC)		MFR (PN-4RST)	
DCH (PN-SC01)		PLO (PN-CK00)	